
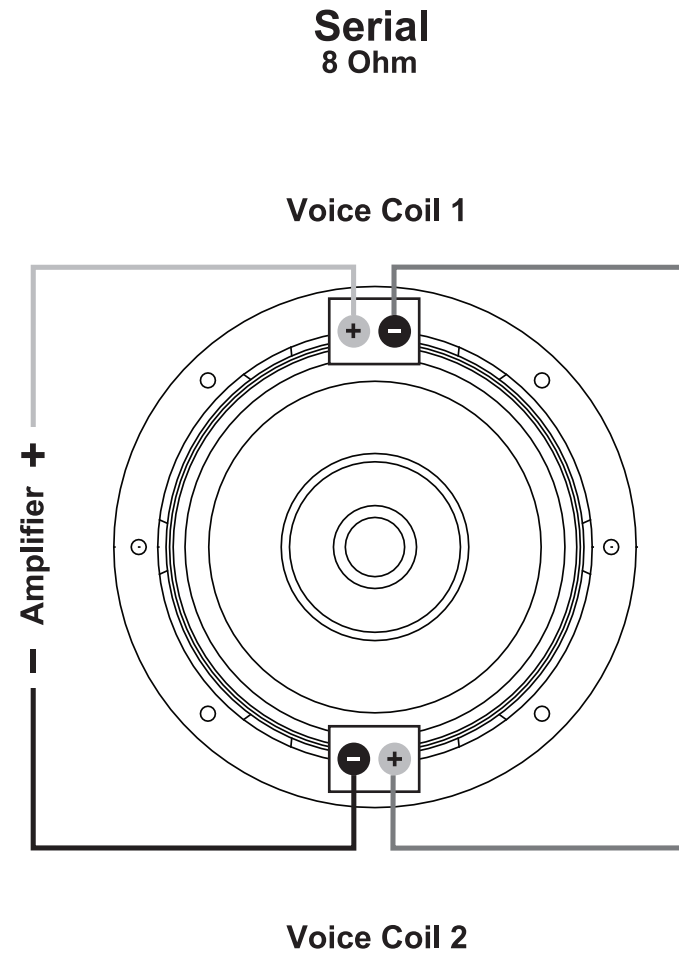


WIRING DIAGRAM

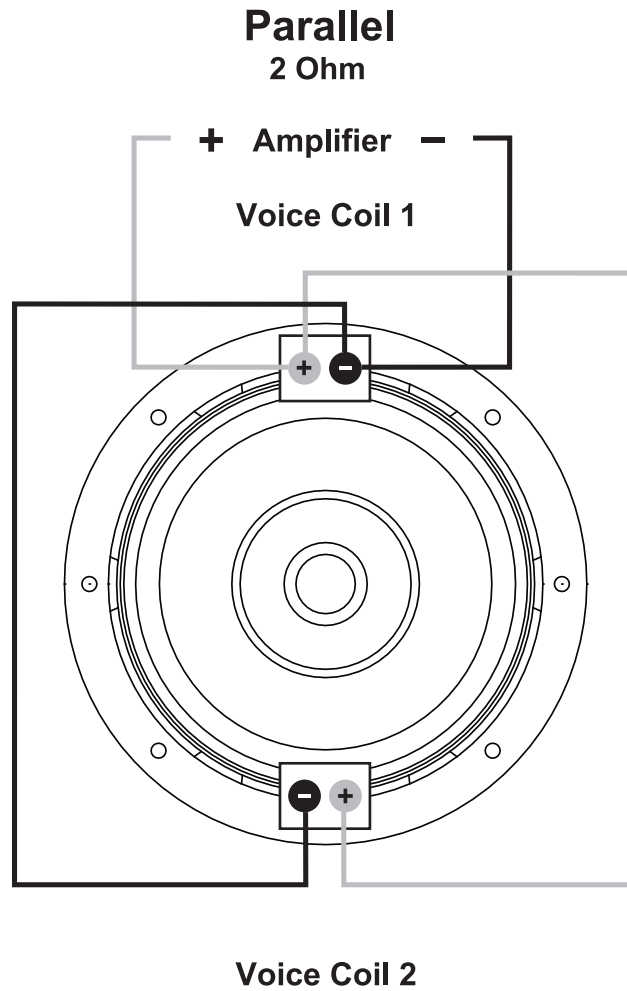

SPECIFICATIONS

	RMS W	MAX W	NOM. IMP. Ohm	OUTER DIAMETER in	MOUNTING HOLE in	MOUNTING DEPTH in	Xmax +/- max. mm	SD cm ²	Mms g	Re Ohm	Fs Hz	Qms	Qes	Qts	VAS L	SPL dB/1W	Le mH	VC in
THW12D4	500	1000	4 + 4	12.71	10.82	5.35	20	137	150.5	4 x 4	41.3	9.72	1.38	1.2	35.85	87.8	0.81	2.5

RECOMMENDED ENCLOSURES

	SEALED ENCLOSURE					
	VOLUME	-3dB FREQ.	TUNING FREQ.	HEIGHT	WIDTH	DEPTH
	Vb ft ³	F3 Hz	Fb Hz	in	in	in
THW12D4	0.992	48	45	14	14	14

	VENTED ENCLOSURE					
	VOLUME	-3dB FREQ.	TUNING FREQ.	PORT	PORT SURFACE	PORT LENGTH
	Vb ft ³	F3 Hz	Fb Hz	in	in ²	in
THW12D4	1.888	41	37	12.5 x 2.5	31.25	27

Visit Hifonics.com   

Hifonics products are designed and engineered in the USA by

MAXXSONICS

www.maxxsonics.com

HF THW QSG 01 - rev1

WARRANTY

Maxxsonics LLC. warrants this product, to the original consumer purchaser, to be free from defects in material and workmanship for a period of one (1) year from the date of purchase.

Maxxsonics LLC. will, at its discretion, repair or replace defective products during the warranty period. Components that prove to be defective in materials and workmanship under proper installation and use must be returned to the original authorized Maxxsonics LLC. retailer from where it was purchased. A photocopy of the original receipt must accompany the product being returned. The costs associated with removal, re-installation and freight are not the responsibility of Maxxsonics LLC. This warranty is limited to defective parts and specifically excludes any incidental or consequential damages connected therewith. To view the full warranty, please visit the website.