

UTOPIA

Technical specifications /
Spécifications techniques

6WM: 2
8WM: 4
TBM: 6
3.5WM: 8
SUB10WM: 10
165W-XP: 12


3.5WM

Midrange 3 1/2"


8

MECHANICAL DRAWING

Dimensions in mm

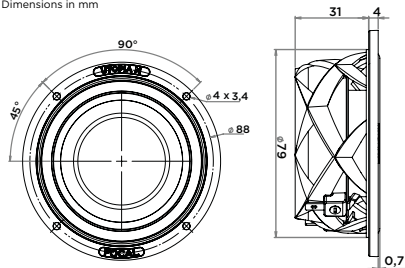

FREQUENCY RESPONSE

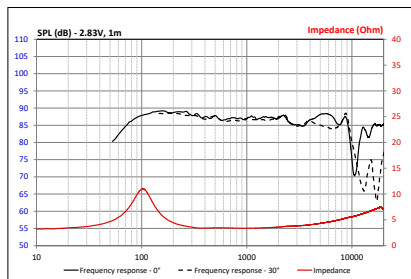

3.5WM

Technical specifications

9

SPECIFICATIONS

Nominal power	50W
Maximum power	100W
Sensitivity	88dB
Nom. impedance	4Ω
Cone	W
Surround	Butyl
DC resistance	3.1Ω
VC diameter	45mm 1 9/16"
Former	Glass Fiber
Layers	1
Wire	CCAW
Magnet D x H	42x4mm 1 21/32" x 3/16"
Net weight	250g 0.55lbs

PARAMETERS

Rdc	3.1Ω
Fs	105Hz
Mms	4g
Cms	0.5mm/N
Vas	1l
Qts	0.58
Qes	1
Qms	2
Bxl	3N/A
Sd	38.5cm²
SPL	85dB
Xmax	2.5mm




UTOPIA M

3.5WM

Product Data Sheet

MADE IN
FRANCE

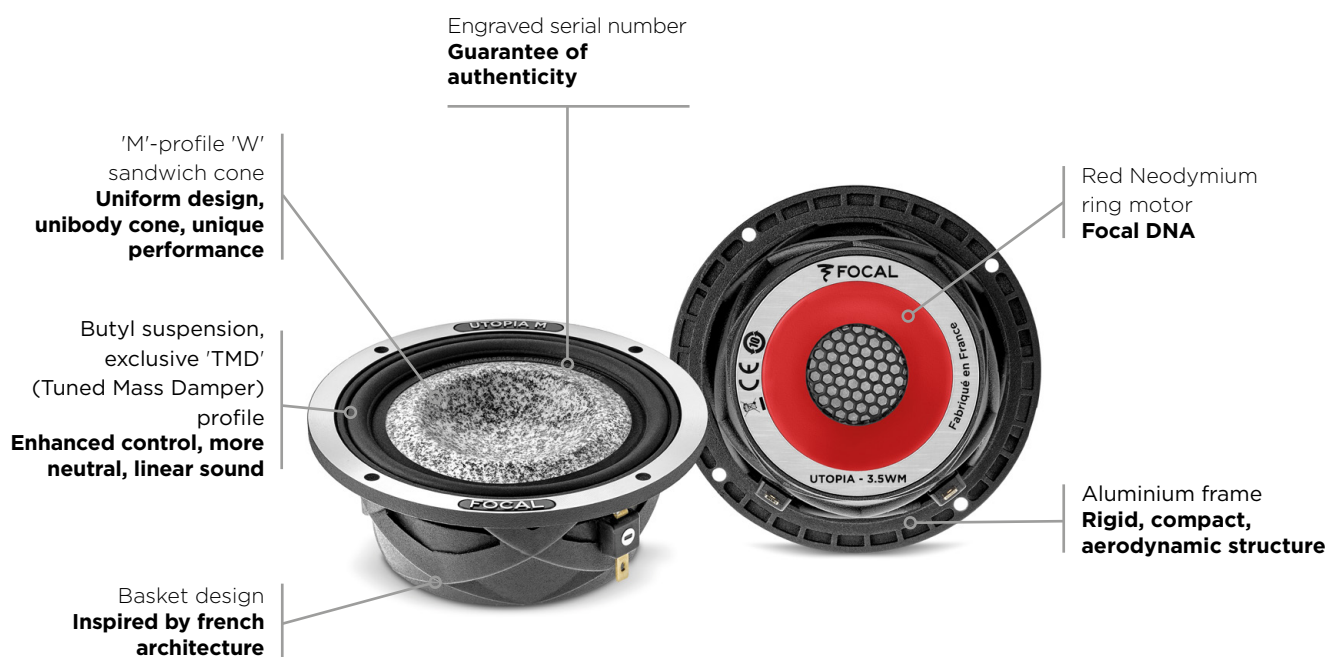

Key points

- 'M'-profile 'W' cone
- 'TMD' suspension
- Frequency response: 200Hz - 10kHz
- Shallow depth



Type	Midrange
Midrange	(3.5") 87.5mm
Voice coil diameter	(1.8") 45mm
Motor	Neodymium
Cone	'M'-profile 'W'
Suspension	Tuned Mass Damper (TMD®)
Impedance	4Ω
Max. power	100W
Nom. power	50W
Sensitivity (2.83V/1m)	88dB
Frequency response	200Hz - 10kHz
Accessories	Mounting screws supplied Optional grilles

 **FOCAL®**