


Infinity Primus Speaker





Car Audio Speaker
Haut-parleur audio automobile
Altavoz de audio para automóvil
Alto-falante automotivo
Fahrzeuglautsprecher
Diffusore Car Audio
Autoluidspreker
Bilstereohøytaler
Autokaiutin
Автомобильный динамик
Bilhögtalare
Bilhöjtaler
カーオーディオ・スピーカー
Głośnik samochodowy
카오디오 스피커
车载扬声器
汽車音響喇叭
Speaker Audio Mobil
Araba Ses Hoparlörü





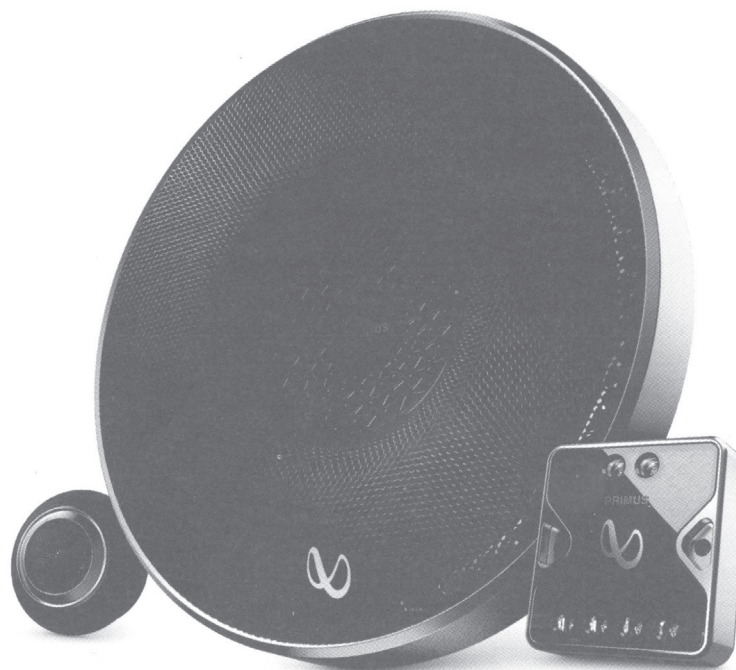


Installation manual
Manuel d'installation
Manual de instalación
Manual de instalação
Installationshandbuch
Manuale d'installazione
Installatiehandleiding
Installasjonsveiledning
Asennusopas
Руководство по установке
Installationsanvisning
Installationsmanual
設置マニュアル
Instrukcja instalacji
설치 설명서
安裝手冊
安裝手冊
Panduan instalasi
Kurulum kılavuzu






PR5010CS

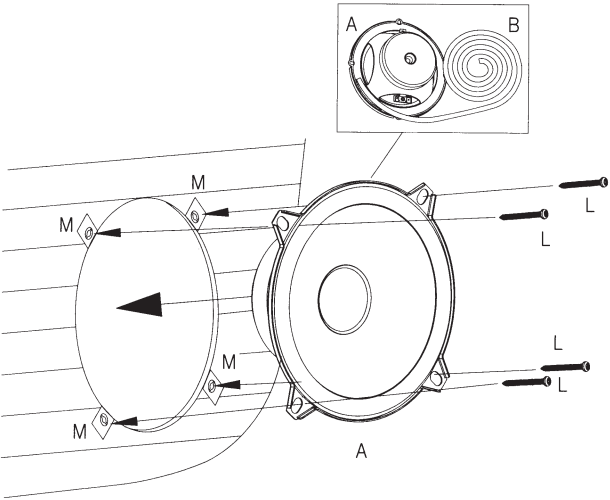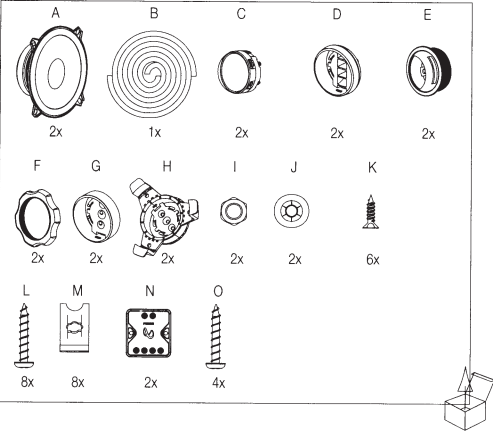


PR610CS

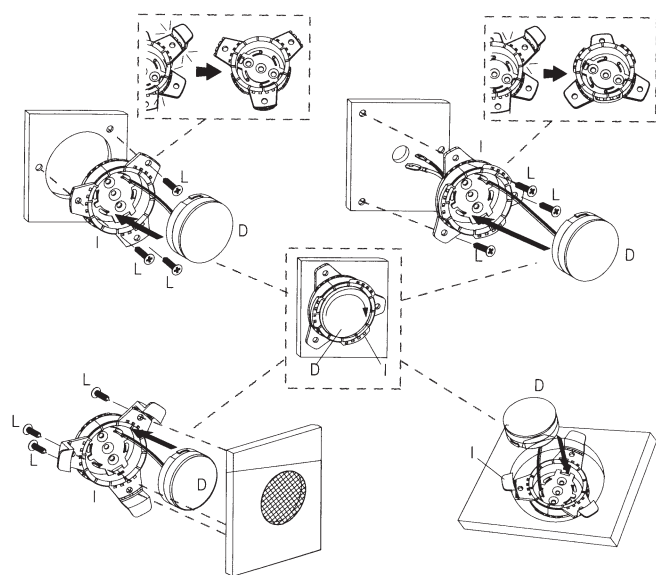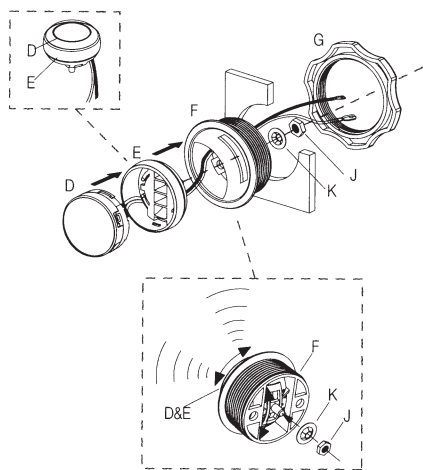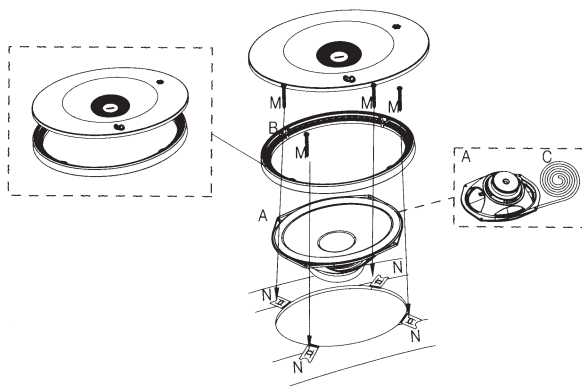


PR8612CF

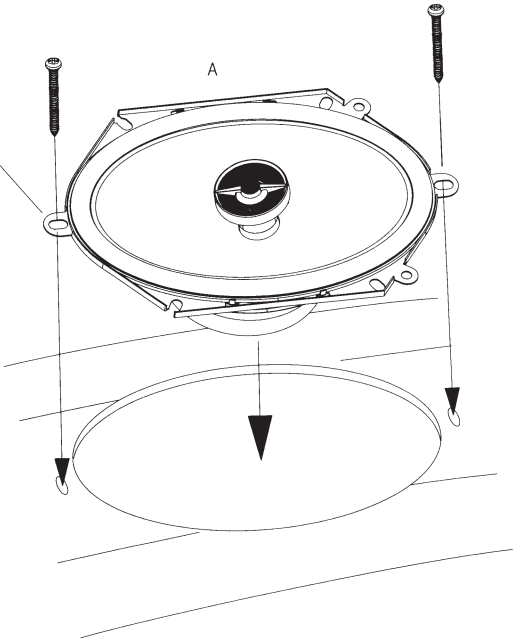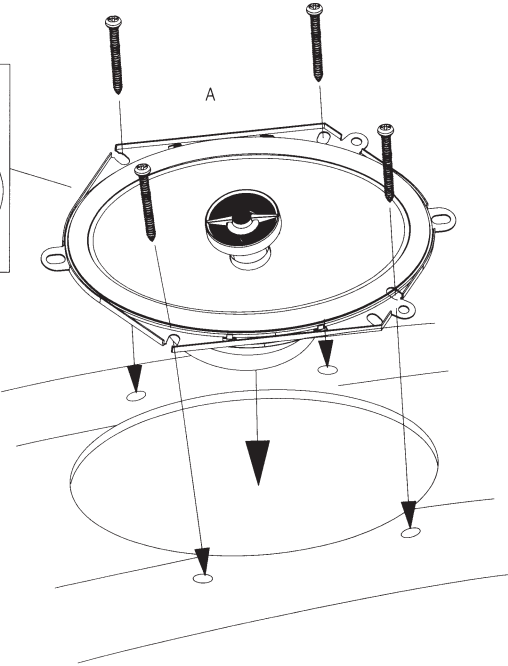



PR5012IS









PR5012IS

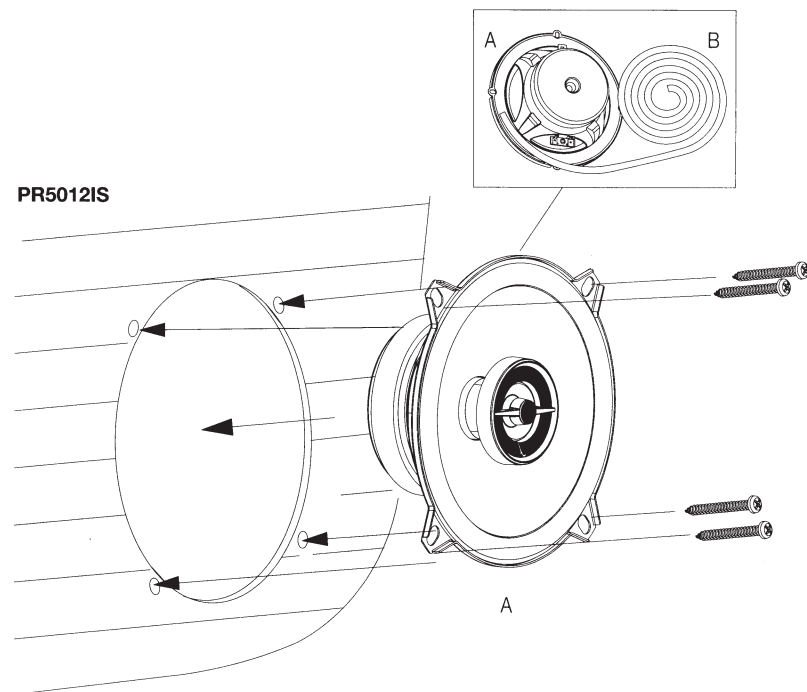




PR9613IS

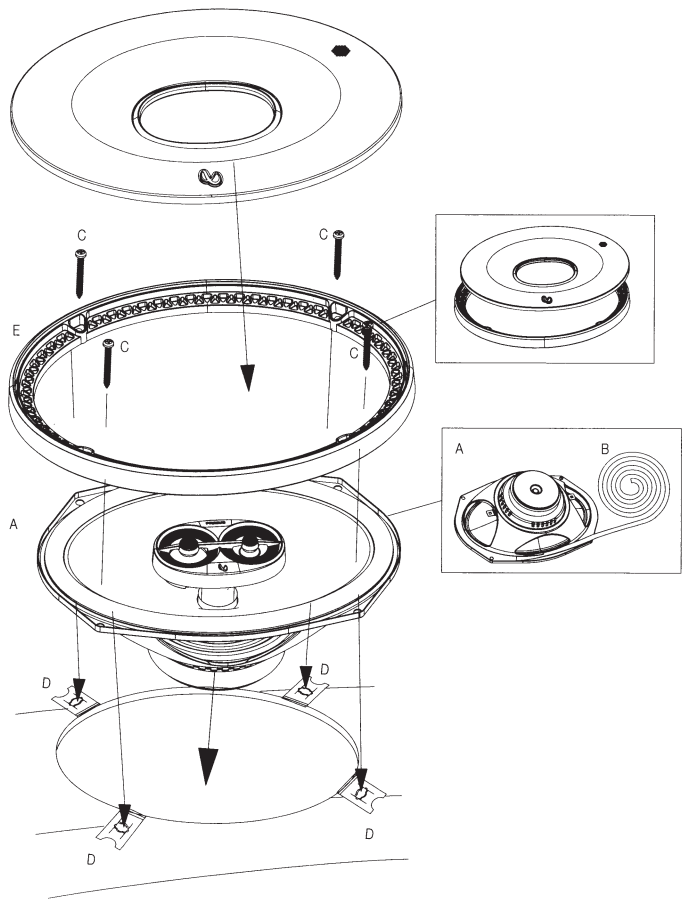



PR6510CS

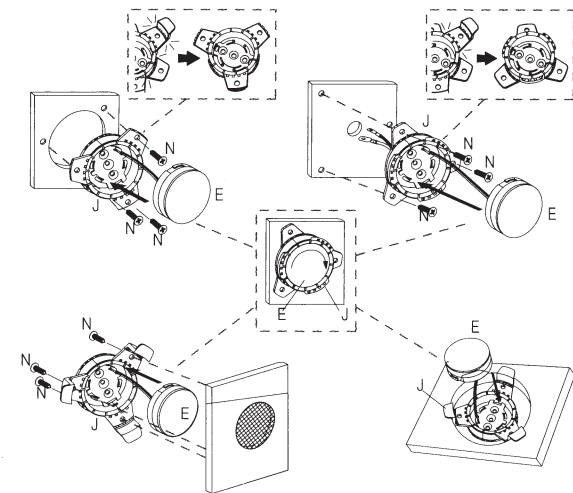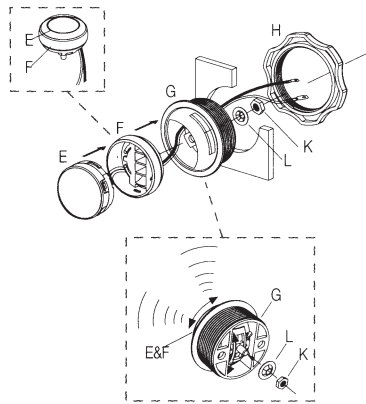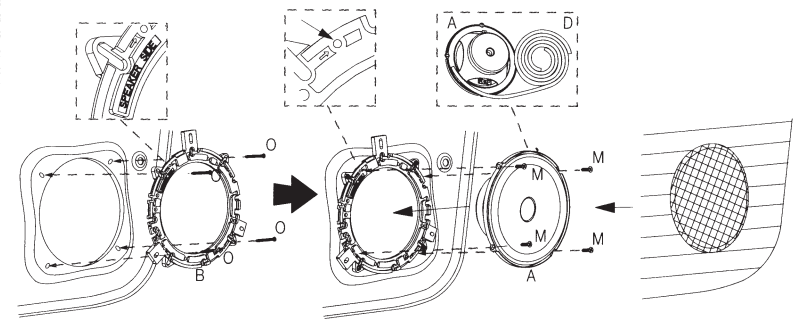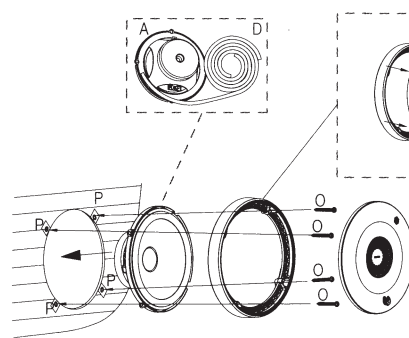



PR6512IS

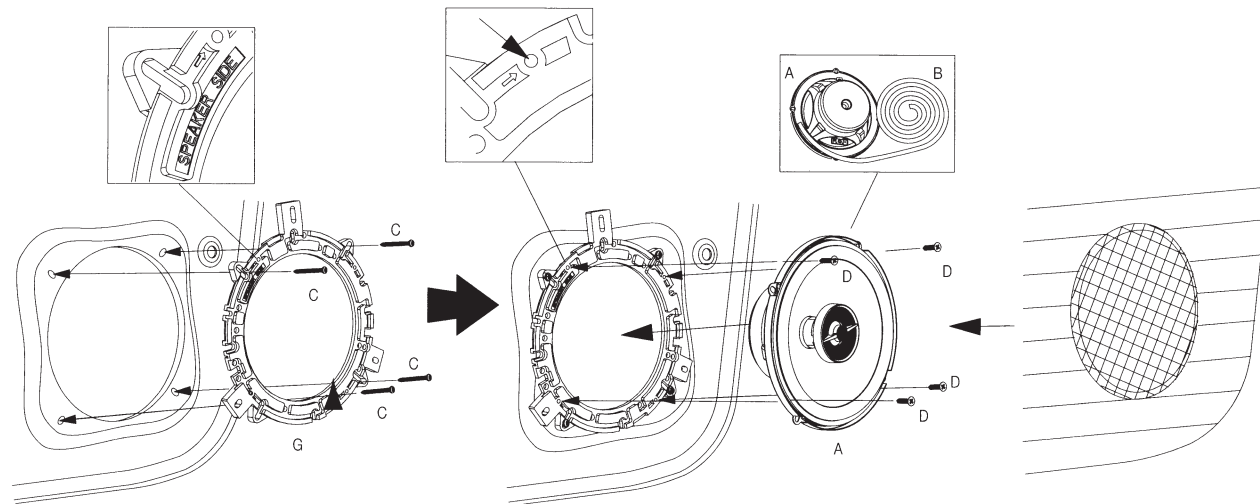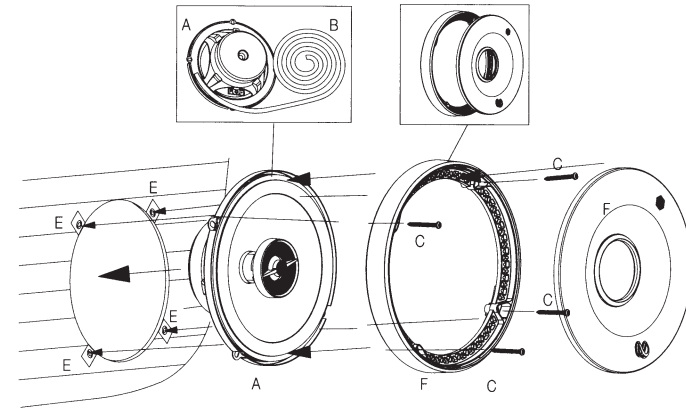



PR5012IS





PR6512IS




PR8612CF

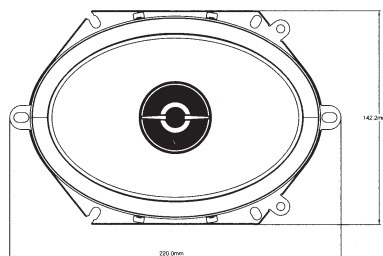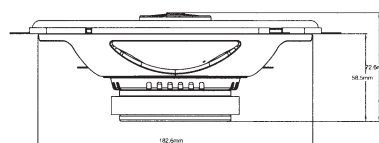


PR9613IS

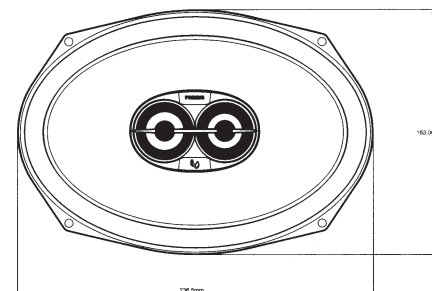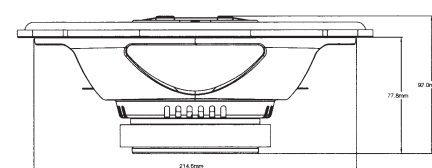


**PR5012IS / PR6512IS
PR8612CF / PR9613IS**

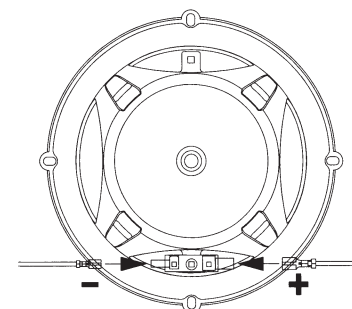








PR9610cs

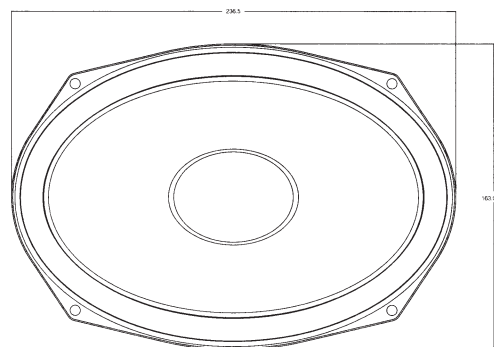


PR5010CS




PR6510CS

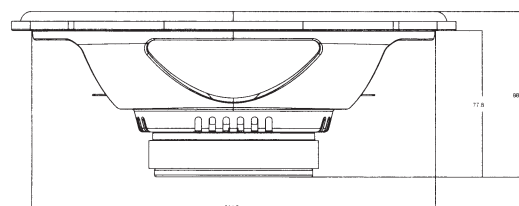

PR5010CS / PR6510CS / PR9610CS



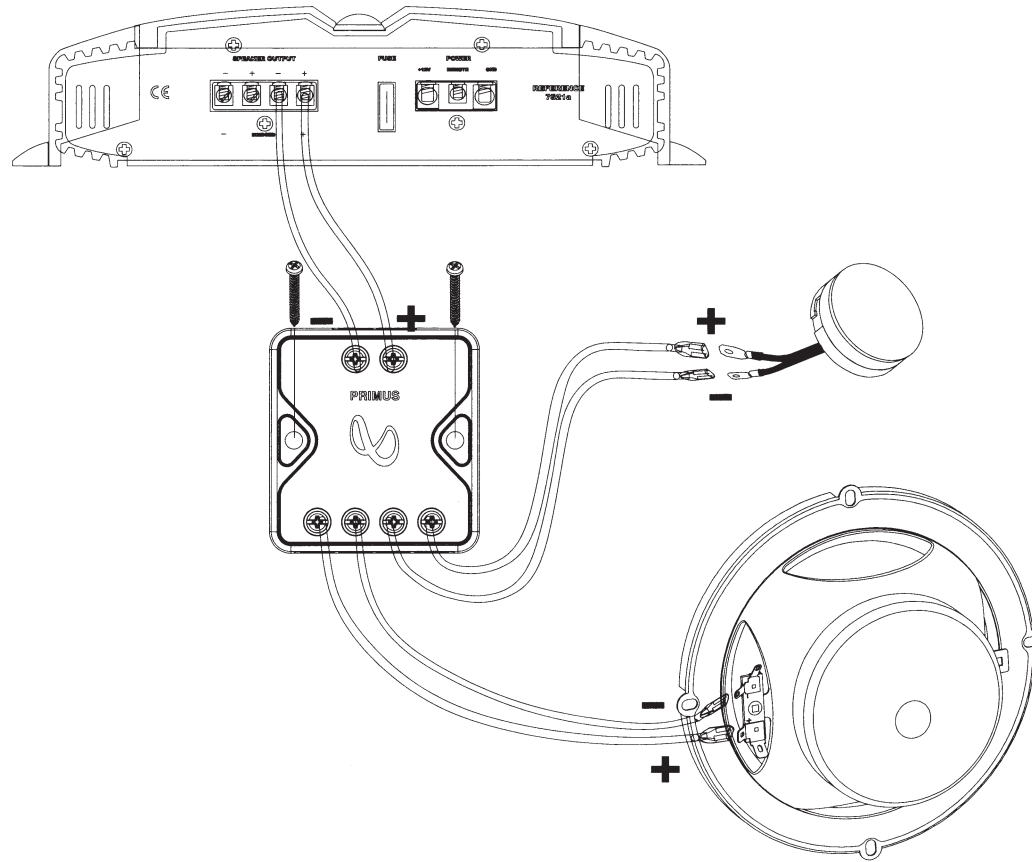

SPECIFICATIONS	Primus PR6612sa	Primus PR6612sa	Primus PR6613sa	Primus PR6612cf	Primus PR6610cs	Primus PR6610cs	Primus PR6610cs
Type	6-1/2" (160mm) two-way multielement speaker	5-1/4" (130mm) two-way multielement speaker	6" x 9" three-way multielement speaker	6" x 8" two-way multielement speaker	5-1/4" (130mm) two-way component speaker system	6-1/2" (160 mm) two-way component speaker system	6" x 9" two-way component speaker system
Continuous power handling	55W	40W	90W	55W	55W	80W	100W
Peak power handling	165W	120W	270W	165W	165W	240W	300W
Frequency response	53Hz-20kHz	67Hz-20kHz	46Hz-21kHz	49Hz-20kHz	67Hz-20kHz	53Hz-20kHz	46Hz-20kHz
Nominal impedance	2.7 ohms	2.7 ohms	2.7 ohms	2.7 ohms	2.7 ohms	2.7 ohms	2.7 ohms
Sensitivity (2.83V/1m)	89dB	88dB	89dB	88.5dB	88dB	88dB	89dB
External diameter	6-1/4"(158mm)	5-1/8"(129mm)	9-5/16" X 6-7/16" (236.5mm X 163mm)	8-11/16" X 5-5/8" (220mm X 142.2mm)	5-1/8"(129mm)	6-1/4"(158mm)	9-5/16" X 6-7/16" (236.5mm X 163mm)
Mounting cutout diameter	5"(127mm)	4-1/2"(113.6mm)	8-1/2" X 5-3/4" (214.6mm X 144.6mm)	7-1/4" X 5" (182.6mm X 125.6mm)	4-1/2"(113.6mm)	5"(127mm)	8-1/2" X 5-3/4" (214.6mm X 144.6mm)
Total depth	2-11/16"(68.4mm)	2-5/16"(58.7mm)	3-5/8" (92mm)	2-11/16" (68.4mm)	2-3/16"(55mm)	2-9/16"(64.8mm)	3-1/2" (89mm)
Mounting depth	2-1/16"(51.5mm)	1-15/16"(48mm)	3-1/8" (77.8mm)	2-19/64" (58.5mm)	1-15/16"(48mm)	2-1/16"(51.5mm)	3-1/8" (77.8mm)

SPECIFICATIONS	Primus PR6612sa	Primus PR6612sa	Primus PR6613sa	Primus PR6612cf	Primus PR6610cs	Primus PR6610cs	Primus PR6610cs
BL (Tm)	3.562	3.209	3.887	3.635	3.209	3.562	3.887
DCR (ohms)	2.42	2.22	2.76	2.72	2.22	2.42	2.76
Mms (g)	13.562	10.235	23.213	15.642	10.235	13.562	23.213
Sd (cm²)	132.73	103.67	261.69	176.71	103.67	132.73	261.69
Cms (µm/N)	438	232	413	421	232	438	413
Vas (l)	11.21	3.544	18.2721	18.685	3.544	11.21	18.2721
Fs (Hz)	65.8	103.3	51.4	61.2	103.3	65.8	51.4
Qes	1.21	1.434	1.367	1.248	1.434	1.21	1.367
Qms	8.642	10.526	12.324	11.308	10.526	8.642	12.324
Qts	0.97	1.262	1.231	1.21	1.262	0.97	1.231
Crossover Point	4.4kHz	4.0kHz	4.0kHz	4.7kHz	5.0kHz	5.6kHz	5.0kHz

SPÉCIFICATIONS	Primus PR6612sa	Primus PR6612sa	Primus PR6613sa	Primus PR6612cf	Primus PR6610cs	Primus PR6610cs	Primus PR6610cs
Type	Haut-parleur multi-éléments deux voies 160mm (6-1/2")	Haut-parleur multi-éléments deux voies 130 mm (5-1/4")	Haut-parleur multi-éléments trois voies 152 mm x 229 mm (6" x 9")	Haut-parleur multi-éléments trois voies 152 mm x 203 mm (6" x 8")	Kit écôté haut-parleur automobile 130 mm (5-1/4")	Kit écôté haut-parleur automobile 160 mm (6-1/2")	Kit écôté haut-parleur deux voies 152 mm x 229 mm (6" x 9")
Puissance admissible continue	55W	40W	90W	55W	55W	80W	100W
Puissance admissible crête	165W	120W	270W	165W	165W	240W	300W
Réponse en fréquence	53Hz-20kHz	67Hz-20kHz	46Hz-21kHz	49Hz-20kHz	67Hz-20kHz	53Hz-20kHz	46Hz-20kHz
Impédance nominale	2.7 ohms	2.7 ohms	2.7 ohms	2.7 ohms	2.7 ohms	2.7 ohms	2.7 ohms
Sensibilité (2.83V/1m)	89dB	88dB	89dB	88.5dB	88dB	88dB	89dB
Diamètre externe	6-1/4"(158mm)	5-1/8"(129mm)	9-5/16" X 6-7/16" (236.5mm X 163mm)	8-11/16" X 5-5/8" (220mm X 142.2mm)	5-1/8"(129mm)	6-1/4"(158mm)	9-5/16" X 6-7/16" (236.5mm X 163mm)
Diamètre de découpe de montage	5"(127mm)	4-1/2"(113.6mm)	8-1/2" X 5-3/4" (214.6mm X 144.6mm)	7-1/4" X 5" (182.6mm X 125.6mm)	4-1/2"(113.6mm)	5"(127mm)	8-1/2" X 5-3/4" (214.6mm X 144.6mm)
Profondeur totale	2-11/16"(68.4mm)	2-5/16"(58.7mm)	3-5/8" (92mm)	2-11/16" (68.4mm)	2-3/16"(55mm)	2-9/16"(64.8mm)	3-1/2" (89mm)
Profondeur de montage	2-1/16"(51.5mm)	1-15/16"(48mm)	3-1/8" (77.8mm)	2-19/64" (58.5mm)	1-15/16"(48mm)	2-1/16"(51.5mm)	3-1/8" (77.8mm)



HARMAN International Industries, Inc.
8500 Balboa Boulevard, Northridge, CA 91329 USA

© 2017 HARMAN International Industries, Incorporated. All rights reserved.
Infinity is a trademark of HARMAN International Industries, Incorporated, registered in the United States and/or other countries.

www.infinitiespeakers.com

Features, specifications and appearance are subject to change without notice.

© 2017 HARMAN International Industries, Incorporated. Все права защищены.
Infinity является торговой маркой Harman International Industries, Incorporated, зарегистрированной в США и/или других странах.

Функции, характеристики и внешний вид описываемых компонентов могут быть изменены без предварительного уведомления.



Торговая марка	: Infinity
Назначение товара	: Автомобильная акустическая система
Изготовитель	: Харман Интернешнл Индастриз Инкорпорейтед, США, 06901 Коннектикут, г.Стэмфорд, Атлантик Стрит 400, офис 1500
Страна происхождения	: Вьетнам
Импортёр в Россию	: ООО "ХАРМАН РУС СиАйЭс", РОССИЯ, 127018, г.МОСКВА, УЛ. ДВИНЦЕВ, Д.12, КОРПУС 1
Гарантийный период	: 1 год
Информация о сервисных центрах	: www.harman.com/ru тел. +7-800-700-0467
Срок службы	: 5 лет
Срок хранения	: не ограничен
Условия хранения	: Стандартные при нормальных значениях климатических факторов внешней среды
Номер документа соответствия	: Товар не подлежит обязательной сертификации
Дата производства	: Дата изготовления устройства определяется по двум буквенным обозначениям из второй группы символов серийного номера изделия, следующих после разделительного знака «-». Кодировка соответствует порядку букв латинского алфавита, начиная с января 2010 года: 000000-MY0000000, где «M» - месяц производства (А - январь, В - февраль, С - март и т.д.) и «Y» - год производства (А - 2010, В - 2011, С - 2012 и т.д.).



Primus Speakers

Attractively-priced Infinity car speakers available in seven models and four sizes to accommodate nearly all applications, environments and budgets.



PRIMUS by Infinity: Car Audio with Attitude

New Primus speakers feature our patented Plus One™ polypropylene woofers which feature more radiating cone area for increased output and edge-driven tweeters for better high frequency dispersion. Speakers are remarkably transparent at the top with vocals, horns and strings and deliver big bass with plenty of slam. Long story short: superior sound top to bottom. True 4 ohm architecture gives the amplifier room to reach peak power for increased depth and detail. There are seven Primus models for easy installation in any vehicle, whether it's a truck, compact or limo. In addition to passing demanding reliability and environmental testing, all speakers are individually voiced by some of the world's best transducer engineers to authenticate the Infinity sound. It's not a coincidence that Infinity is one of the world's top-selling car audio speaker brands.

Features

- ▶ Patented Plus One™ Polypropylene Woofers
- ▶ Edge-Driven Tweeters
- ▶ True 4 Ohm Architecture
- ▶ Harman Standard Reliability Testing
- ▶ Competitively Tuned
- ▶ Infinity at an Affordable Price



Primus Speakers

Attractively-priced Infinity car speakers available in seven models and four sizes to accommodate nearly all applications, environments and budgets.

Patented Plus One™ Polypropylene Woofers

Polypropylene cones with up to 35% more radiating cone area than other cones in the same class provide higher sensitivity, increased low frequency output and better tonal balance. Hi-roll rubber surrounds using automotive grade materials result in cleaner reproduction and higher durability whether it's easy listening or time to show and shine.

Edge-Driven Tweeters

Edge-driven tweeters deliver wider dispersion and smoother high frequency response with increased power handling for high- and mid-frequencies.

True 4 Ohm Architecture

True 4 ohm architecture with low impedance voice coils give the amplifier room to deliver peak power providing stronger and clearer sound with better depth and detail.

Harman Standard Reliability Testing

Infinity speakers have to undergo a testing process that would destroy lesser speakers. Infinity freezes them, bakes them, shakes them, blasts them with ultraviolet light and drives them at full power for days at a time.

Competitively Tuned

Speakers are individually tuned to assure high quality audio versus "off-the-shelf" manufactured sound. This means that the usual specifications as well as individual speaker characteristics are considered when tuning for the Infinity sound.

Infinity at an Affordable Price

This is Infinity—one of the most innovative and legendary companies in audio. Infinity is one of the top-selling car speaker brands in the world—obviously, this is no coincidence.

What's in the Box

PR5012is

2 x Speakers
1 x Foam gasket
2 x Brand stickers
Owner's manual

PR6512is

2 x Speakers
2 x Grilles
2 x Plastic multi-hole adapter rings
1 x Foam gasket
16 x Screws
8 x Speed clips
2 x Brand stickers
Owner's manual

PR9613is

2 x Speakers
2 x Grilles
2 x Spacers
1 x Foam gasket
8 x Screws
8 x Speed clips
2 x Brand stickers
Owner's manual

PR8612cf

2 x Speakers
1 x Foam gasket
2 x Brand stickers
Owner's manual

PR5010cs

2 x Speakers
1 x Foam gasket
2 x Crossovers
2 x Tweeters
2 x Flush-mount cups
2 x Threaded flush-mount adapters
2 x Plastic locking nuts
2 x Surface-mount cups
2 x Starfish tweeter mounts
2 x Washers
2 x Scew nuts
18 x Screws
8 x Speed clips
2 x Brand stickers
Owner's manual

PR6510cs

2 x Speakers
2 x Grilles
2 x Plastic multi-hole adapter rings
1 x Foam gasket
2 x Crossovers
2 x Tweeters
2 x Flush-mount cups
2 x Threaded flush-mount adapters
2 x Plastic locking nuts
2 x Surface-mount cups
2 x Starfish tweeter mounts
2 x Washers
2 x Scew nuts
26 x Screws
8 x Speed clips
2 x Brand stickers
Owner's manual

PR9610cs

2 x Speakers
2 x Grilles
2 x Spacers
1 x Foam gasket
2 x Crossovers
2 x Tweeters
2 x Flush-mount cups
2 x Threaded flush-mount adapters
2 x Plastic locking nuts
2 x Surface-mount cups
2 x Starfish tweeter mounts
2 x Washers
2 x Scew nuts
18 x Screws
8 x Speed clips
2 x Brand stickers
Owner's manual

Technical Specifications:

PR5012is

Power Handling: 40W RMS, 120W peak
Sensitivity (@ 2.83V): 88dB
Frequency Response: 67Hz – 20kHz
Voice Coil Diameter: 1 in. (25mm)
Impedance: 2.7 ohms

PR6512is

Power Handling: 55W RMS, 165W peak
Sensitivity (@ 2.83V): 88dB
Frequency Response: 53Hz – 20kHz
Voice Coil Diameter: 1 in. (25mm)
Impedance: 2.7 ohms

PR9613is

Power Handling: 90W RMS, 270W peak
Sensitivity (@ 2.83V): 89dB
Frequency Response: 46Hz – 21kHz
Voice Coil Diameter: 1 in. (25mm)
Impedance: 2.7 ohms

PR8612cf

Power Handling: 55W RMS, 165W peak
Sensitivity (@ 2.83V): 88.5dB
Frequency Response: 49Hz – 20kHz
Voice Coil Diameter: 1 in. (25mm)
Impedance: 2.7 ohms

PR5010cs

Power Handling: 55W RMS, 165W peak
Sensitivity (@ 2.83V/1 m): 88dB
Frequency Response: 67Hz – 20kHz
Voice Coil Diameter: 1 in. (25mm)
Impedance: 2.7 ohms

PR6510cs

Power Handling: 80W RMS, 240W peak
Sensitivity (@ 2.83V): 88dB
Frequency Response: 53Hz – 20kHz
Voice Coil Diameter: 1 in. (25mm)
Impedance: 2.7 ohms

PR9610cs

Power Handling: 100W RMS, 300W peak
Sensitivity (@ 2.83V): 89dB
Frequency Response: 46Hz – 20kHz
Voice Coil Diameter: 1 in. (25mm)
Impedance: 2.7 ohms

