



6.5"
COMPONENT SET



SRX60C
6.5" Component Speaker Set
STREET REFERENCE

200**WATT**
PEAK POWER PER PAIR



FEATURES

- Rubber surround
- Poly Dustcap
- Soft dome tweeter
- Shallow mounting depth

#MEMPHISAUDIO



6.5"

SRX60C

| | |
|---------------------|--------|
| Size (in) | 6.5 |
| RMS / PEAK (w) | 50/100 |
| Sensitivity (dB) | 88 |
| Magnet Size (oz) | 11.2 |
| Mounting Depth (in) | 2 |

Tweeter Installation

Tweeters should be positioned high, preferably at ear level. Optimum performance will be obtained when tweeters are angled toward the listener. The included angled mount is an easy way to achieve this when door or dash mounting a tweeter.




MEMPHIS



Established 1965, Memphis, TN, USA

Angle Mount


When the surface you are mounting your tweeter to points away from the listener, use the included angle mount to direct the sound back towards the listener.




Steel
Mesh



Tweeter



Angled
Base



Flush Mount

The best conspicuous tweeter mounting option is a flush mount. The recessed design provides superior protection for the tweeter and it blends with the interior of your vehicle.



Steel
Mesh




Front
Casing



Tweeter




Flat
Base

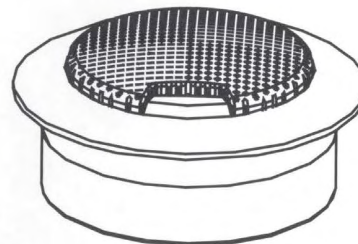


Surface Mount


When there is inadequate depth available for flush mounting, the surface mount option provides a convenient mounting solution.



Steel
Mesh



Tweeter



Flat
Base

