




VIV

SIXFIVE SERIES

VIV60C Crossover Settings

- 1 Boosts Extreme Tweeter Levels
- 2 Low Pass X-Over For Mid-Range. 6 or 12dB/octave
- 3 Tweeter Output Level

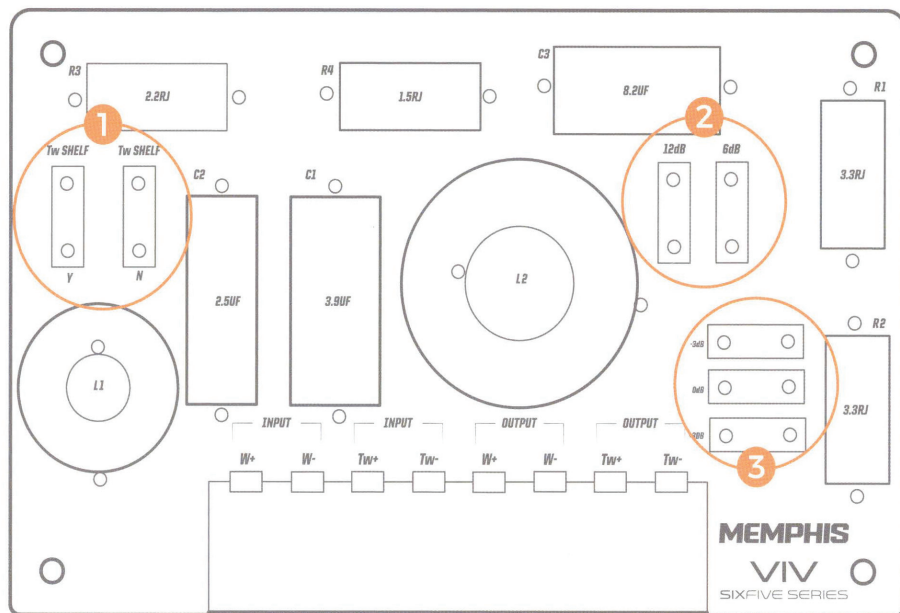

VIV

SIXFIVE SERIES

VIV60C Warranty

Memphis Audio Six Five Series Component Speaker Set Limited Warranty

This product has a 2 year warranty from the date of purchase for defects in material or workmanship. This warranty will be extended to 3 years when installed by a Memphis authorized dealer using Memphis Connection products. The warranty is void if the product has been physically damaged by improper usage or abuse. If repairs are attempted outside of a Memphis Audio facility, the warranty is void.

This warranty is limited to the original retail purchaser and does not cover any expenses incurred in the removal or re-installation of the product. This warranty does NOT apply to product exterior and cosmetics. Memphis Audio disclaims any liability for incidental or consequential damages caused by product defects. Memphis Audio liability will not exceed the purchase price of the product and the warranty period specified.

What is NOT covered under warranty

- Damage due to improper installation
- Damage caused by exposure to moisture, excessive heat, chemical cleaners and/or UV radiation
- Damage through negligence, misuse, accident or abuse. (Repeated returns for the same damage may be abuse)
- Product damaged in accident and/or due to criminal activity
- Service performed by anyone other than Memphis Audio
- Subsequent damage to other components
- Any cost or expense related to the removal or re-installation of product
- Products with tampered, missing, altered or defaced serial numbers/labels
- Freight damage
- The cost of shipping product to Memphis Audio
- Return shipping on non-defective items
- Any product not purchased from an authorized Memphis Audio dealer

Some states do not allow the exclusion or limitation of incidental or consequential damages. The above limitations or exclusions may not apply to you. This warranty gives you specific rights, you may have other rights which vary from state to state.

If warranty service is required, a return authorization number is required to return the product to Memphis Audio. Warranty shipments to Memphis Audio are the responsibility of the purchaser. Pack the product carefully in the original carton if possible. Memphis Audio will not be responsible for damages incurred in shipment or due to improper packaging materials used by the purchaser.

If determined to be within warranty your product will be repaired or replaced at the discretion of Memphis Audio.

#SIXFIVESERIES



@MemphisCarAudio



@MemphisCarAudioUSA

www.memphiscaraudio.com

#SIXFIVESERIES



@MemphisCarAudio




@MemphisCarAudioUSA

www.memphiscaraudio.com

VIV

SIXFIVE SERIES

VIV60C Tweeter Installation

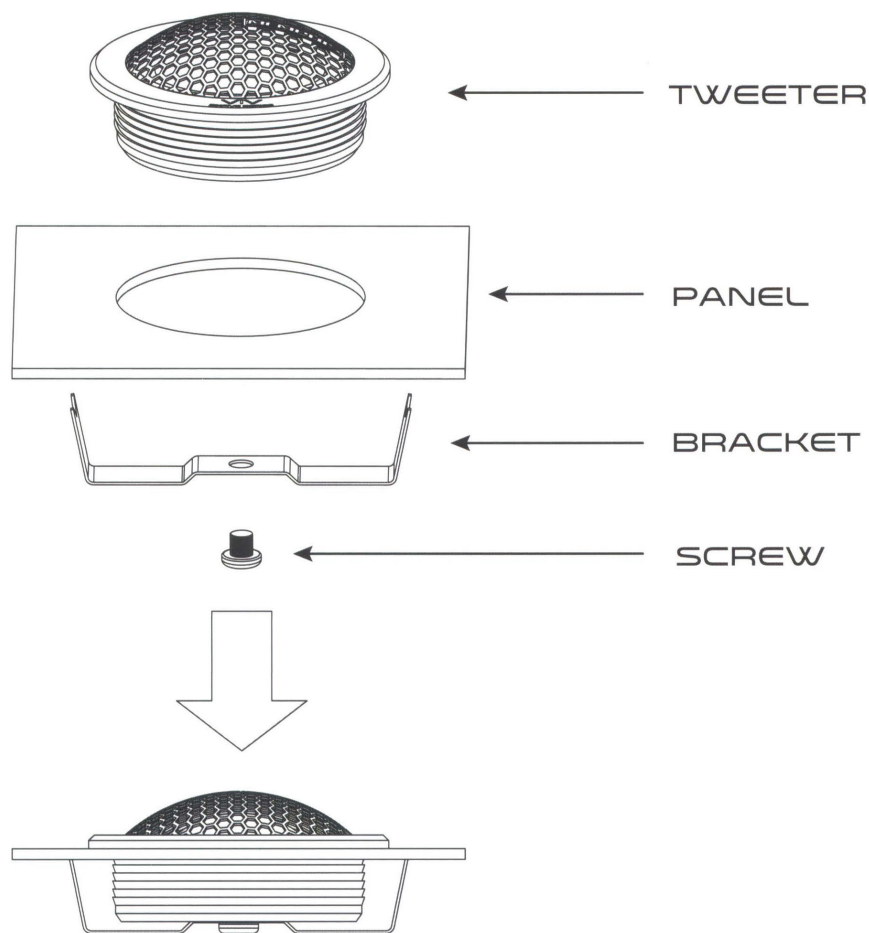

Tweeters should be positioned high, preferably at ear level. Optimum performance will be obtained when tweeters are angled toward the listener.

The least conspicuous tweeter mounting option is a flush mount. The recessed design provides superior protection for the tweeter and it blends with the interior of your vehicle.

To mount the tweeter cut a hole in the desired panel. Slide the tweeter into place. Use the included screw and backer bracket to tighten the tweeter into place. The final installation should look like the above image.

#SIXFIVESERIES



@MemphisCarAudio



@MemphisCarAudioUSA


www.memphiscaraudio.com



VIV

SIXFIVE SERIES

VIV60C | 6.5" Component Speaker Cut Out Template

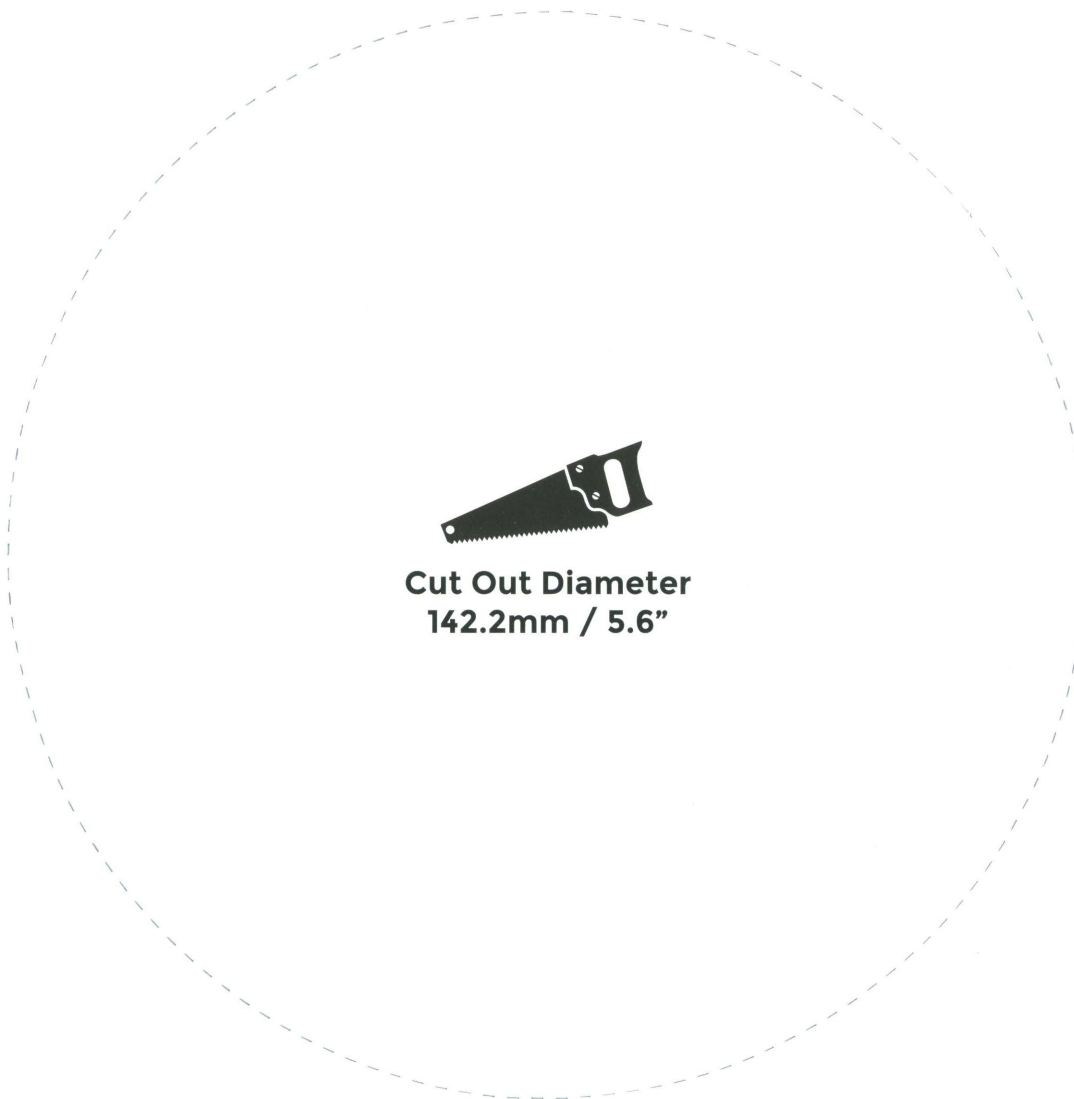



6.5"



VIV60C
6.5" Component Speaker Set
SIX FIVE
SERIES

80/160 **WATT**
RMS/PEAK POWER



VIV60C 6.5" Component Speaker Set

www.memphiscaraudio.com

Memphis Car Audio
122 Gayoso Ave
Memphis, TN 38103

P. 900.489.2300

Serial NO.:



VIV60C





SHOW US YOUR INSTALL!
#MemphisAudio



FEATURES

- Cast aluminum Six Five Series basket
- double layer composite fiber cone
- Versatile crossover settings
- Aluminum housed silk tweeter



VIV60C

Size (in)	6.5
RMS / PEAK (w)	80/160
Sensitivity (dB)	90
Magnet Size (oz)	20
Mounting Depth (in)	2.95