







maximoultra **MkII**

1" Soft Dome Tweeter


CONTENTS

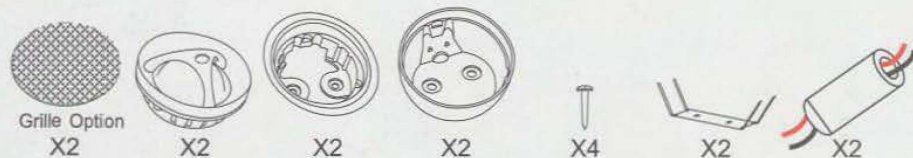


FLUSH MOUNTING

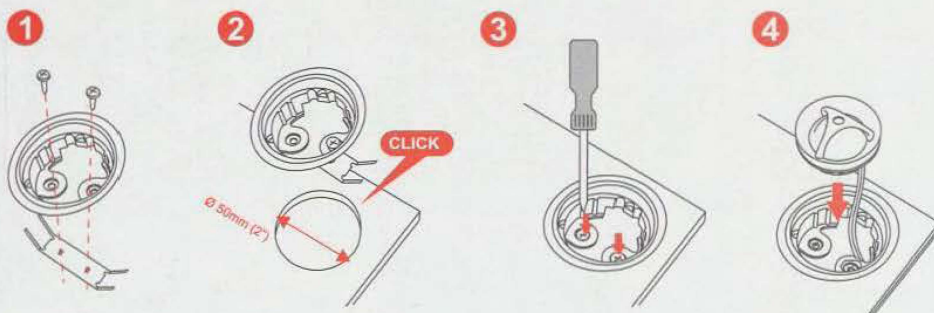

SURFACE MOUNTING

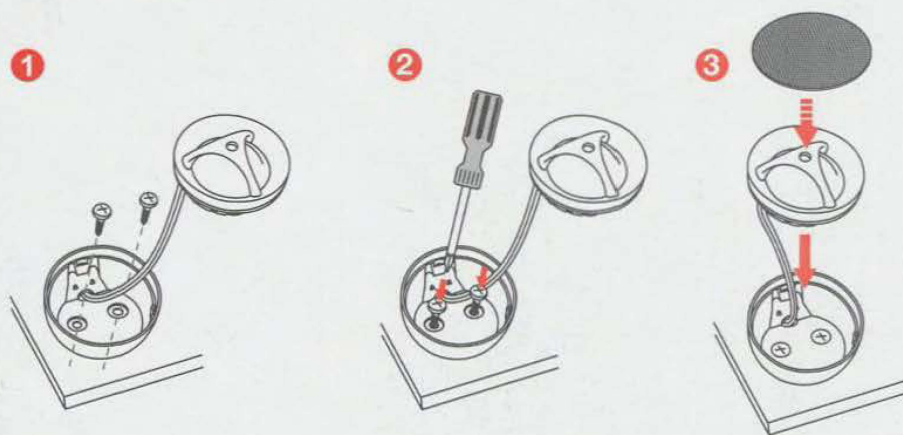

CROSSOVER CONNECTION

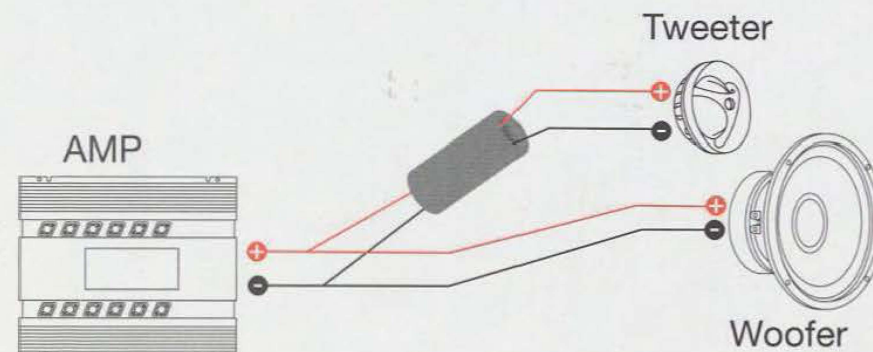

SPECIFICATIONS

Nominal Impedance	4 ohm
Power Handling	90W
Max. Transient Power Handling	180W
Sensitivity (2.83V/1M)	90.5dB
Frequency Response	1800-20,000 Hz
Voice Coil Diameter	25mm(1")
Voice Coil Wire	Copper
Magnet System	Neodymium
Mounting Depth	20.00mm (0.80")



www.morelhifi.com