




**American
International**
Car Stereo Installation Kits & Accessories

CDK660 Mounting Kit

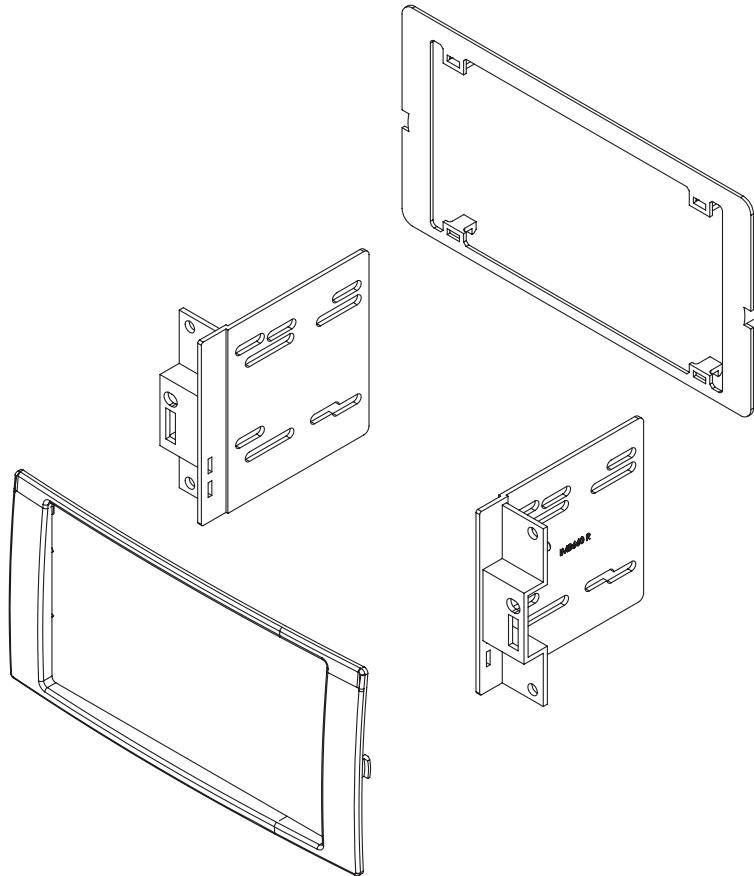

VEHICLE APPLICATION

CHRYSLER

2007 ASPEN
2006-10 PT CRUISER

DODGE

2004-07 DURANGO

JEEP

2006-07 COMMANDER
2005-07 GRAND CHEROKEE

FACTORY PANEL MODIFICATION REQUIRED



www.aampglobal.com www.aius.net

2500 East Francis Street Ontario, CA 91761, U.S.A.

Sales: (800) 477-2267

Intl: (727) 572-9255

Support: 888-228-5560

PANEL PREPARATION

1. Snap the cutting template supplied with the CDK660 to the radio opening of the OEM panel.
2. Using the template as a guide cut inside of the template opening, clearing out the OEM panel that would prevent the CDK660 mainframe from snapping in.
NOTE: THIS INSTALLATION KIT REQUIRES PROFESSIONAL INSTALLATION.
THE OEM PANEL WILL NEED TO BE CUT TO MOUNT KIT.


KIT ASSEMBLY INSTRUCTIONS

Double DIN Mount Application

1. Insert ISO mountable radio between ISO mount brackets and loosely attach to sides of radio using screws provided with radio when possible, or screws supplied with kit. Using the main frame of the CDK660 as a guide, slide radio forward or backward for desired look and then tighten screws to the radio.

NOTE: Attach a rear support bracket to the rear of the new radio and adjust as necessary to support the weight of the radio. Suggested.

Figure A

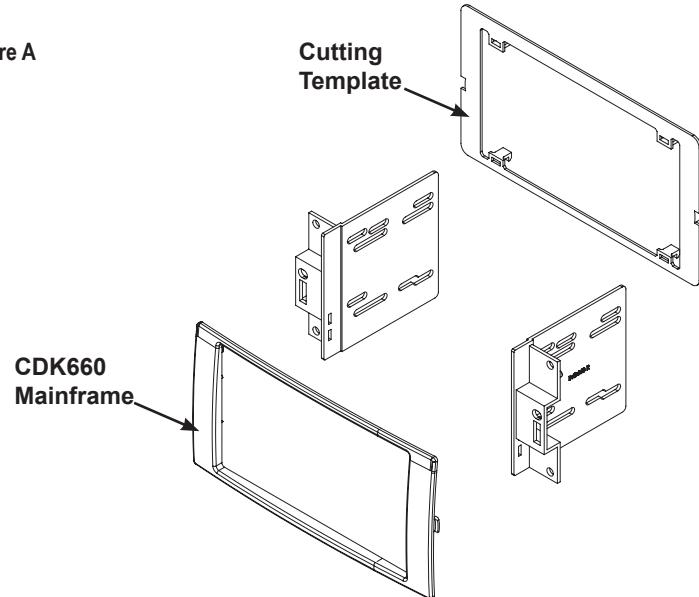

2007-08 DODGE CALIBER

DASH DISASSEMBLY INSTRUCTIONS

1. Engage the parking brake.
2. Carefully pry upward on the sides of the shifter trim bezel to release.
3. Put key in the ignition and turn to the on position (DO NOT START THE ENGINE)!!
4. Lower the shift lever to the low position.
5. Starting at the bottom, carefully pry upward and outward on the Radio/Climate control trim bezel.
6. Carefully pull bezel forward to allow access to the screws securing the radio to the sub-dash.
7. Remove the (4) Phillips screws securing the radio to the sub-dash.
8. Pull radio forward, disconnect all attached harnesses and antenna lead and remove radio.

2004-07 DODGE DURANGO

DASH DISASSEMBLY INSTRUCTIONS

1. Remove (2) 9/32" screws from the bottom of the Radio / Climate Control Bezel. (The screws are located under the cigarette lighter pocket).
2. Starting at the bottom of the bezel, Carefully pry it forward to detach the bezel from the dashboard.
3. Carefully pull from the top of the bezel down & forward and disconnect the wire harnesses from the rear of the bezel.
4. Leaving the Climate Controls attached to the bezel, remove the bezel from the dashboard. Set the dash bezel aside, out of harms way.
5. Remove the (4) 9/32" screws securing the factory radio to the sub-dash.
6. Carefully Pull the radio forward, disconnect the wire harness & antenna lead and remove radio.

2005-07 JEEP GRAND CHEROKEE

DASH DISASSEMBLY INSTRUCTIONS

1. Carefully pry forward the trim/vent assembly from around the radio and remove.
2. Remove the (4) Phillips screws securing the radio to the sub-dash.
3. Pull radio forward, disconnect the wire harness and antenna lead and remove radio.

2006-07 JEEP COMMANDER

DASH DISASSEMBLY INSTRUCTIONS

1. Remove the (16) 3/16 Allen screws securing the four vent locations of the dash bezel in place.
2. Carefully pry the entire Radio/Vent trim panel forward (Note: there are panel clips along the top edge and one in the middle below the radio). Remove dash panel.
3. Remove the (4) 9/32 screws securing the radio to the sub-dash.
4. Carefully pull radio forward, disconnect all attached harnesses and antenna lead and remove radio.

2006-10 PT CRUISER

DASH DISASSEMBLY INSTRUCTIONS

1. Turn the Vents above the radio horizontal to expose and allow access to the slots where there is an individual Phillips screw located at the bottom of each vent, using a magnetized Phillips screw driver, remove the individual Phillips screw from each vent location.
2. Carefully unclip and pry the entire Radio/Climate control trim bezel forward, disconnect all attached harnesses and remove bezel.
3. Remove the (4) phillip's screws securing the radio to the sub-dash.
4. Pull the radio forward, disconnect the wire harness and antenna lead and remove radio.