


For information about other American International automotive accessories visit our website at:

<http://www.americaninternational.net>



# HON-K832 Mounting Kit

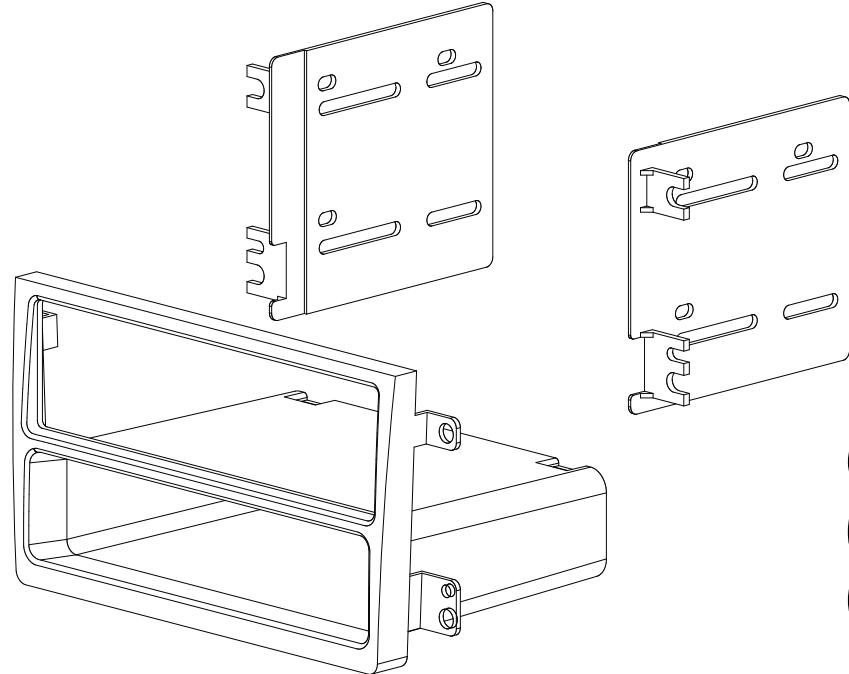

## VEHICLE APPLICATIONS

**Honda**

2007-08 ELEMENT (Excludes LX Models)



**American International**

### Automotive Products Division

1040 Avenida Acaso • Camarillo, CA 93012, U.S.A.

USA Sales (800) 336-6500

Canada Sales (888) 922-3006 • USA Fax (805) 388-7950

### CUSTOMER HELP LINE

8am-4:30 P.S.T. Monday-Friday Except Holidays

**USA 800-323-4329 • Canada 800-245-8777**

iHONK840

## **DASH DISASSEMBLY AND RADIO REMOVAL INSTRUCTIONS**

1. Unclip trim bezel from around radio. There are (2) slots on the bottom of the trim bezel.
2. Remove the (4) 8mm bolts securing factory radio to the sub-dash.
3. Pull radio forward, disconnect wire harness and antenna lead, and remove radio.

## DOUBLE DIN & ISO MOUNT INSTALLATION INSTRUCTIONS

**Does not Requires new radio's metal sleeve (See Illustration Below)**

- ISO MOUNTING DEFINITION

ISO mounting an aftermarket radio is using the brackets and trim ring supplied with the installation kit

- **DIN MOUNTING DEFINITION**


DIN mounting an aftermarket radio is using the mounting sleeve and trim ring supplied by the radio manufacture

**\*Note:** most double din radios will require ISO mounting application.

## KIT ASSEMBLY

1. Slide brackets marked (L)Left and (R)Right, from the back to the front of the kit.
2. Slide your new radio from the back to the front with the face of the radio thru the ISO opening.
3. Attach the radio to the brackets of the kit and adjust to desired look.
4. Be sure to hold the radio in place when installing.

**SEE FIG. A**

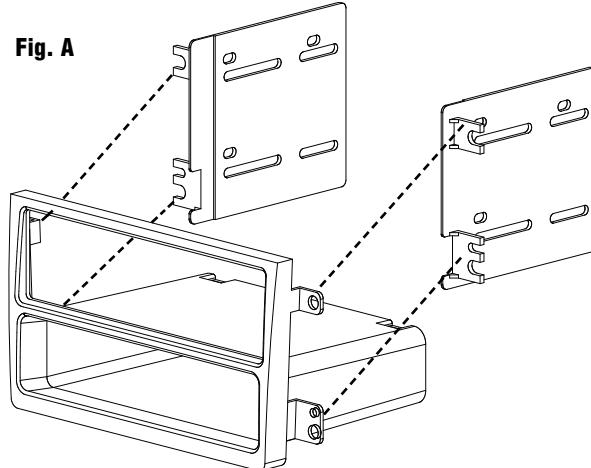

## NOTES: