


For information about other American International automotive accessories visit our website at:

<http://www.americaninternational.net>



**American
International**
Car Stereo Installation Kits & Accessories

HON-K834 Mounting Kit

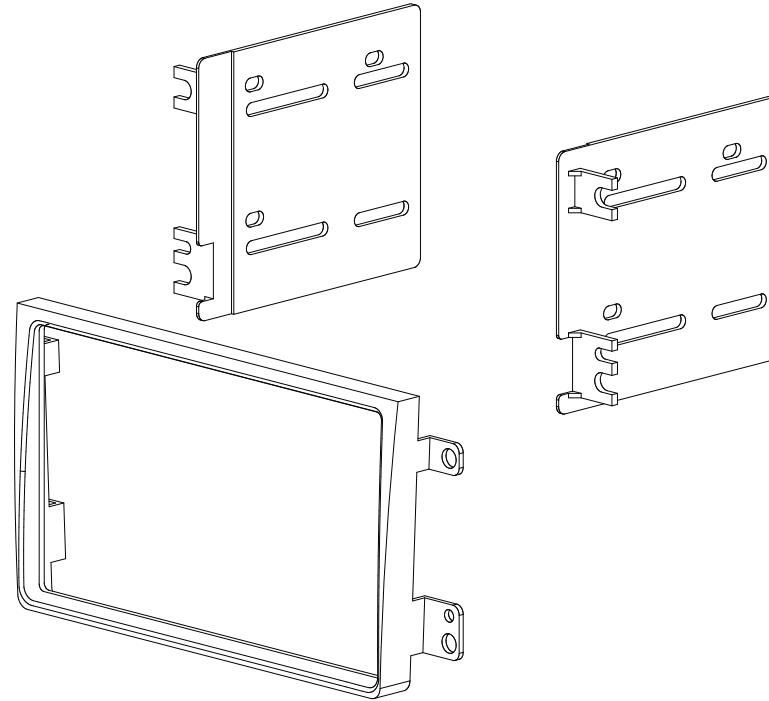

VEHICLE APPLICATIONS

Honda

2007-08 ELEMENT (Excludes LX Models)



American International

Automotive Products Division

1040 Avenida Acaso • Camarillo, CA 93012, U.S.A.

USA Sales (800) 336-6500

Canada Sales (888) 922-3006 • USA Fax (805) 388-7950

CUSTOMER HELP LINE

8am-4:30 P.S.T. Monday-Friday Except Holidays

USA 800-323-4329 • Canada 800-245-8777

iHONK840

DASH DISASSEMBLY AND RADIO REMOVAL INSTRUCTIONS

1. Unclip trim bezel from around radio. There are (2) slots on the bottom of the trim bezel.
2. Remove the (4) 8mm bolts securing factory radio to the sub-dash.
3. Pull radio forward, disconnect wire harness and antenna lead, and remove radio.

DOUBLE DIN & ISO MOUNT INSTALLATION INSTRUCTIONS

Does not Requires new radio's metal sleeve (See Illustration Below)

- ISO MOUNTING DEFINITION

ISO mounting an aftermarket radio is using the brackets and trim ring supplied with the installation kit


- **DIN MOUNTING DEFINITION**

DIN mounting an aftermarket radio is using the mounting sleeve and trim ring supplied by the radio manufacture

***Note:** most double din radios will require ISO mounting application.

KIT ASSEMBLY

1. Slide brackets to each side of install kit. Brackets are marked (L) Left and (R) Right.
2. Slide Double DIN radio in from the back to the front.
3. Find desired look and mount radio with screws supplied.
4. When installing into a vehicle be careful to hold the radio and kit together as they do not attach together until mounted in the dash.

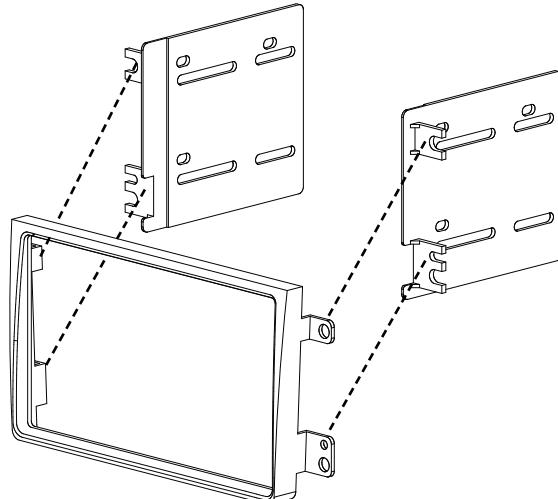

NOTES: