




NDK730 Mounting Kit

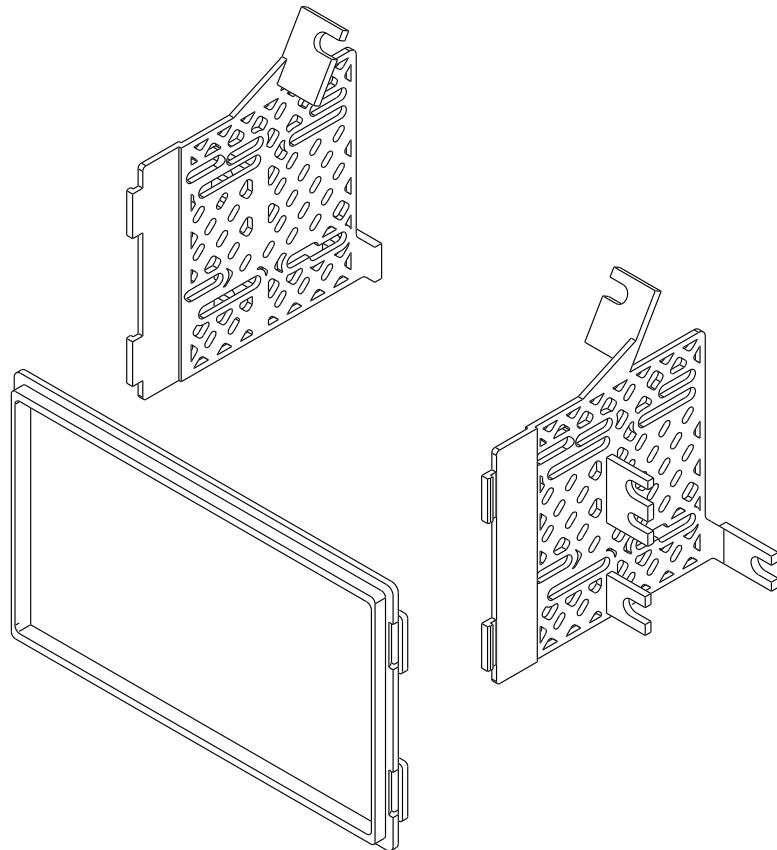

VEHICLE APPLICATIONS

Nissan

- 2005-08 FRONTIER
- 2009-13 FRONTIER (SELECT MODELS)
- 2005-07 PATHFINDER (NO FACTORY NAVIGATION)
- 2008-12 PATHFINDER S
- 2004-15 TITAN (BASE MODEL)
- 2005-08 Xterra
- 2009-13 Xterra (SELECT MODELS)

Suzuki

- 2009-12 EQUATOR EXT CAB



www.aampglobal.com www.aius.net

2500 East Francis Street Ontario, CA 91761, U.S.A.

Sales: (800) 477-2267

Intl: (727) 572-9255

Support: 888-228-5560

INDK730

©2015 AMERICAN INTERNATIONAL INDUSTRIES, INC.

TECH Ver. 3/17 PRINT Ver. 3/17

NISSAN FRONTIER/ NISSAN PATHFINDER (SEE DASH DISASSEMBLY NOTE)

NISSAN Xterra/ SUZUKI EQUATOR

DASH DISASSEMBLY INSTRUCTIONS

NOTE: FOR NISSAN PATHFINDER. YOU MUST REMOVE THE CUP HOLDER TRIM PANEL AND THE SHIFTER TRIM PANEL AND POCKET

1. Carefully remove the panel from the top of the radio.
2. Remove the (1) Phillips screw from the top of the Radio dash trim bezel.
3. Carefully lift upward from the bottom of the radio trim bezel, pull Radio trim bezel forward and remove.
4. Remove the (4) Phillips screws securing the factory radio to the sub-dash.
5. Pull Radio forward, disconnect all harnesses and antenna lead from radio and remove radio.


NISSAN FRONTIER/ NISSAN PATHFINDER/ NISSAN Xterra/ SUZUKI EQUATOR

INSTALLATION INSTRUCTIONS

NOTE: REMOVE SHADED BRACKET TABS (Both L&R mounting brackets). SEE BELOW.

1. Attach the left and right side brackets to the main bracket. See illustration below.
2. Slide radio into kit from rear & attach to ISO mounting brackets using screws supplied with radio when possible, or screws supplied with dash kit. (do not tighten screws at this time).
3. Slide radio forward or backward for your desired look and then tighten the mounting screws.
4. Attach rear support strap to rear radio. (OPTIONAL)

Fig. A

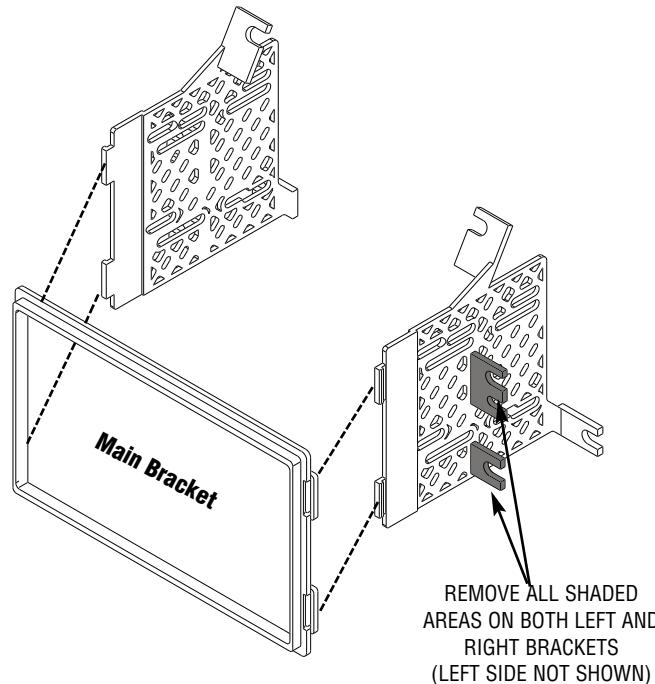

NISSAN TITAN (BASE MODEL)

DASH DISASSEMBLY INSTRUCTIONS

1. Carefully remove the panel surrounding the radio and climate controls.
2. Remove the (4) Phillips screws securing the factory radio to the sub-dash.
3. Pull Radio forward, disconnect all harnesses and antenna lead from radio and remove radio.

NISSAN TITAN

INSTALLATION INSTRUCTIONS

NOTE: REMOVE SHADED BRACKET TABS (Both L&R mounting brackets). SEE BELOW.

1. Attach the left and right side brackets to the main bracket. See illustration below.
2. Slide radio into kit from rear & attach to ISO mounting brackets using screws supplied with radio when possible, or screws supplied with dash kit. (do not tighten screws at this time).
3. Slide radio forward or backward for your desired look and then tighten the mounting screws.
4. Attach rear support strap to rear radio (Optional).

Fig. B

