



SSV WORKS, 4610 Calle Quetzal, Camarillo, CA 93012
www.SSVworks.com | Phone: 818-991-1778 | Fax: 866-293-6751

RZ5-PHZ1A

2020-2024 Polaris RZR Pro
Phase-1 A-Spec 2 Speaker
Dash Pod Kit with JVC MR1



pg **3**
Door Panel
Disassembly



pg **5**
JVR MR1
Installation



pg **9**
Dash Pod
Installation



WIRING DIAGRAM OF COMPLETE KIT

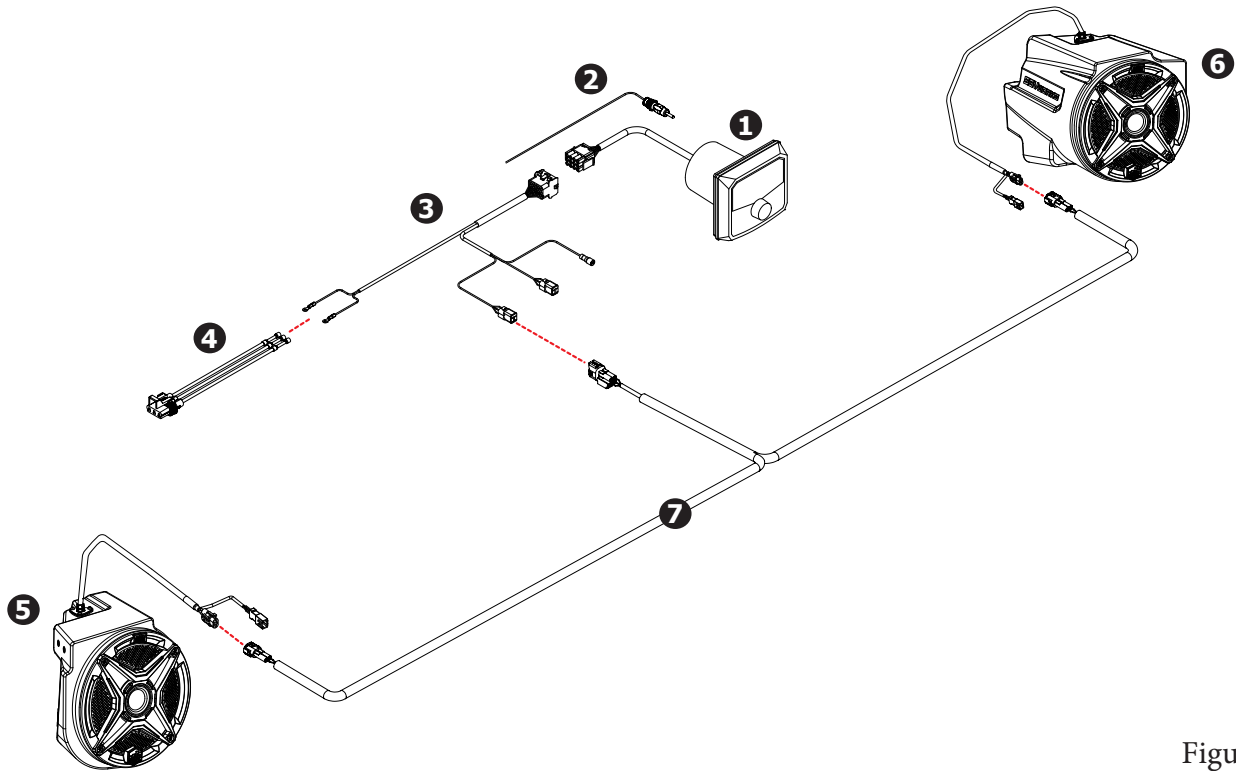


Figure 1

Figure 1 is designed to show the installer a reference overview of the complete 2 speaker wiring diagram. Each installation section will have its own detailed wiring diagram.

	Description	Part #
①	Bluetooth Media Receiver w/ 2.7" color display	B-MR1
②	Universal FM Antenna Cable, 55"	B-H1249
③	JVC to SSV Harness Adapter, 3 ft.	B-H2367
④	Pulse Connector Power Harness	B-H1752
⑤	Front Dash Pod Enclosure, Driver Side	B-RZ5-DF65
⑥	Front Dash Pod Enclosure, Passenger Side	B-RZ5-PF65
⑦	Driver/Passenger "Y" Speaker Harness	B-H1909

PANELS AND DASH DISASSEMBLY




A. Remove all the seats from the vehicle. Compress the release lever located in front of the seat base. With the release lever compressed, tilt the seat forward and remove from the vehicle.



B. Using a 8mm wrench. Disconnect the negative battery cable from the battery.



C. Remove the (2) T40 torx screws and set the hood panel aside.

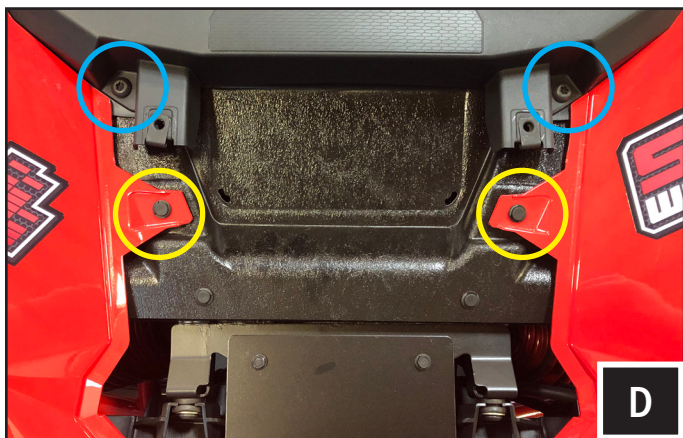


D. Remove the (2) T40 torx screws and (2) push pins with a panel removal tool.




E. Open the top-center dash compartment and lift to remove the compartment tray. We recommend using a panel tool to assist releasing the tray from the compartment. Once the tray is separated from the compartment, pull out the USB cable from the tray, set tray to the side.



F. Use a panel tool to assist with the removal of the (3) trim panels. The blue highlighted points represent the location of the panel clips that are retaining the trim panels to the dash.

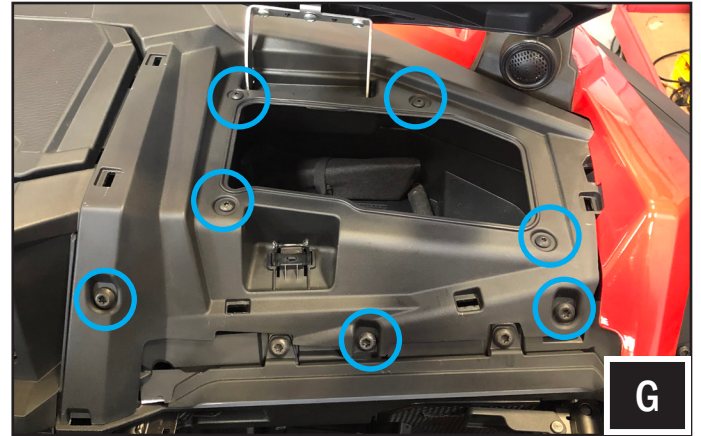

G. Open the glove compartment. Remove the (4) T25 Torx screws and (3) T40 Torx screws.

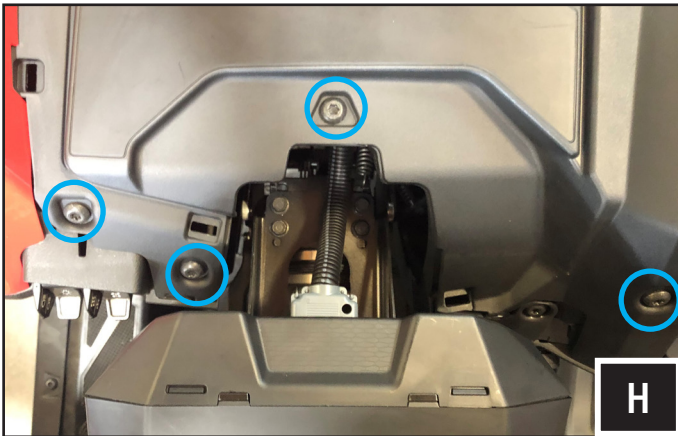

H. Remove the (4) T40 Torx screws that surround the gauge cluster. For ease of access to each screw we recommend adjusting the position of the steering column accordingly.



I. Use a panel to aid in lifting the fenders to release the top dash panel.



J. Pull dash from the vehicle.



K. Lift and remove the glove compartment from the dash cavity.

DASH KIT ASSEMBLY PARTS LIST

WARRANTY INFORMATION:

All SSV Works enclosures are covered by a limited lifetime warranty against defects in material or workmanship. All SSV Works Electronics are covered by a limited 1 year warranty against defects in material or workmanship. All SSV Works Speakers are covered by a limited 1 year warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. Contact SSV Works for further warranty information.



Please read and understand these instructions completely before installation to avoid possible injury, or damage to the accessory or vehicle.


PARTS LIST IMAGES



JVC MR1 Headunit and Trim Ring



RZ5-R1 Dash Mount Panel




Bus Bar Pulse Connector Harness (B-H1752)



DMR1 Mounting Bracket



M6 x 1.0 Screws & Washers x4 (T-30 torx)



Driver/Pass "Y" Speaker Harness (B-H1909)



MR1 Power Harness (B-H2367)

DASH KIT ASSEMBLY and WIRING

TOOLS NEEDED FOR INSTALLATION


- T25, T30, T40 torx driver - #2 phillips screwdriver - Wire cutters/crimpers

INSTALLATION NOTES



For instructions regarding the JVC headunit, refer to the JVC manual.





A. Use a panel tool to assist in removing the center dash cover panel

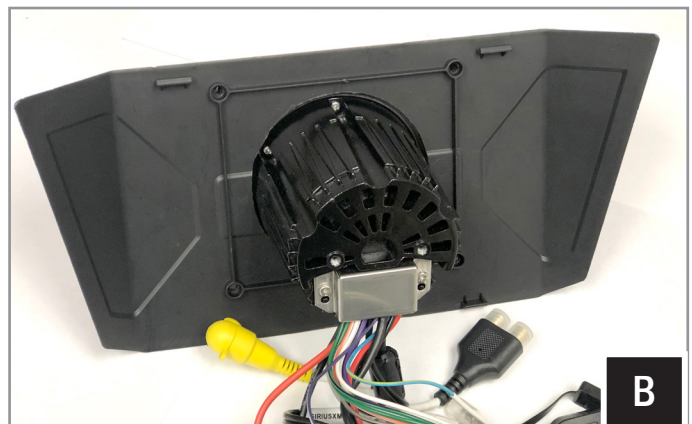


B. Place the MR1 through the new RZ5-R1 dash kit panel.

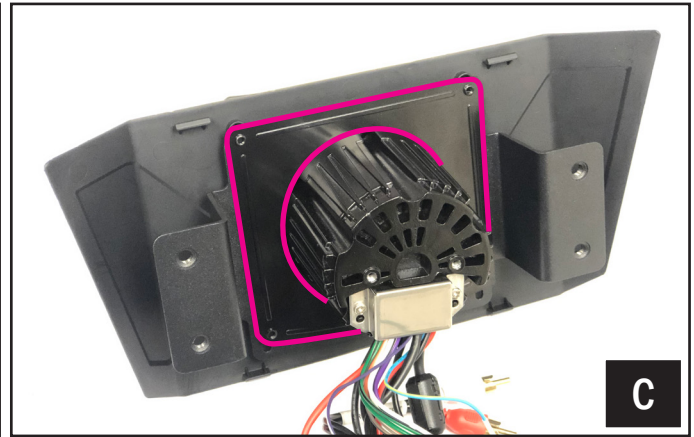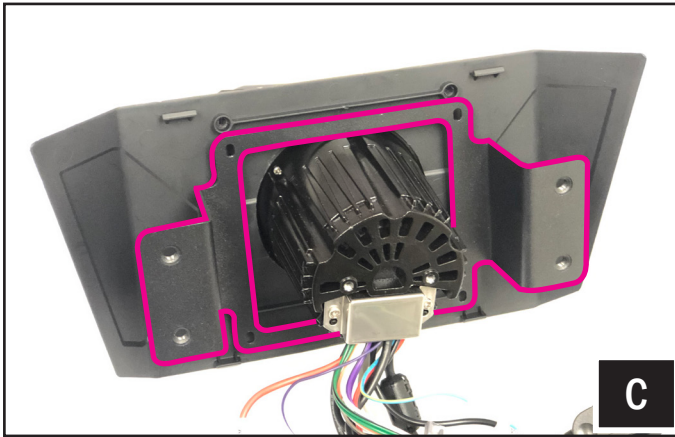



C. Place the DMR1 mounting bracket over the back of the MR1, followed by the base mounting plate.

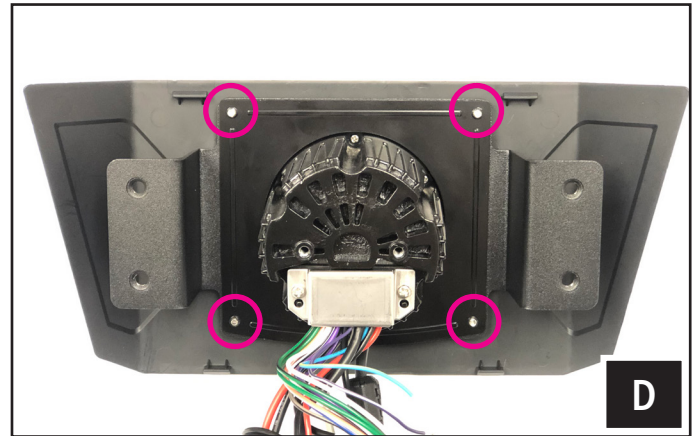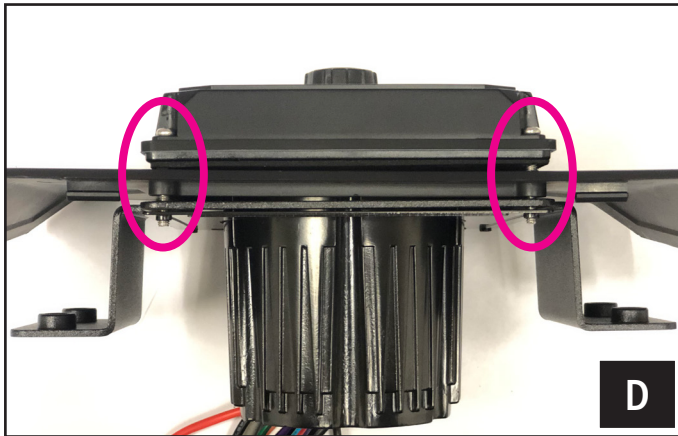


D. Place the (4) dash screws through the MR1, cover panel, DMR1 mounting bracket and thread into the base mounting plate. Do not fully tighten the screws.

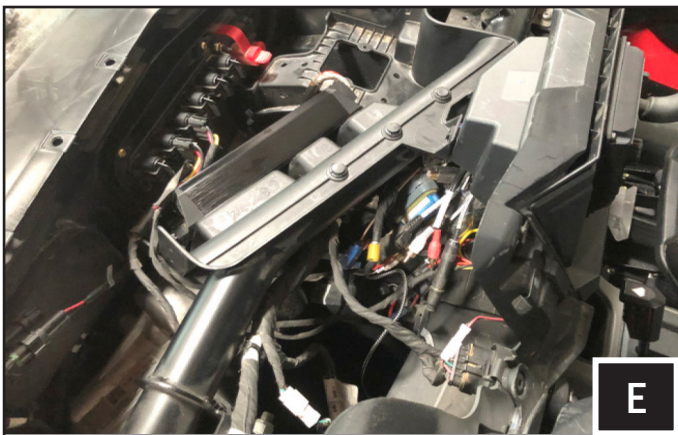


E. Route the MR1 Power Harness into the dash. Route the ring terminal end of the MR1 harness to the bus bar. Cut off the ring terminals and strip the wires.

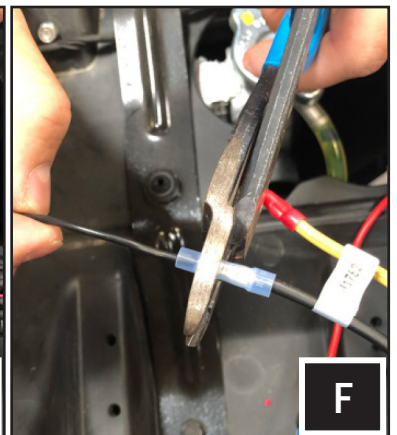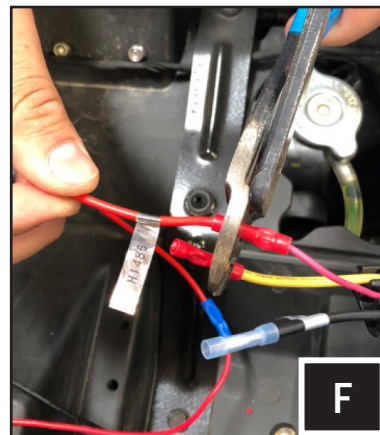


F. Crimp the Red and Black wires to the B-H1752 harness. Crimp Red to Red wires for ACC power. Crimp Red wire to Yellow wire for constant power.

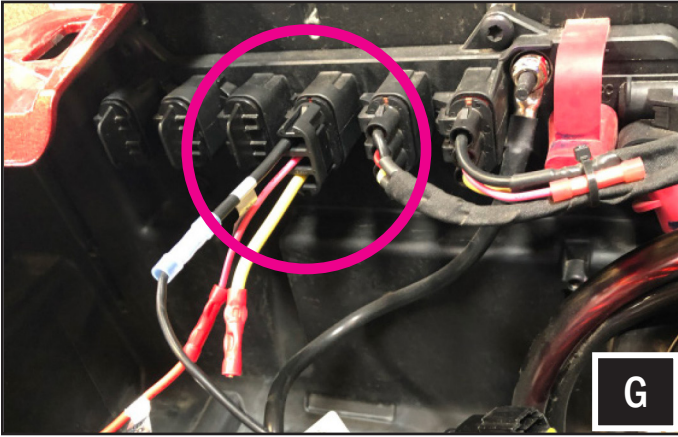


G. Once crimped, remove port cover and plug in to the busbar.

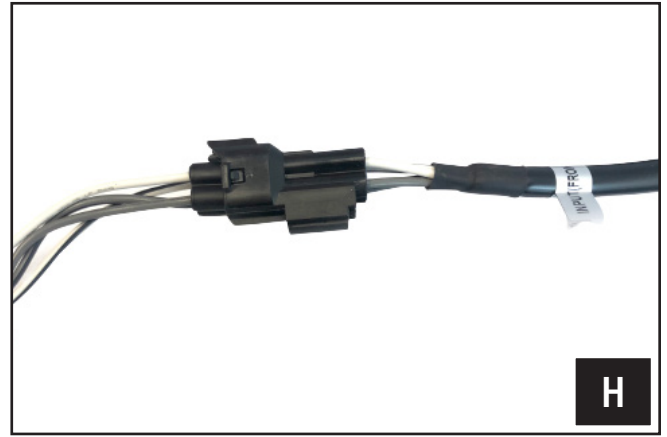

H. Connect the front (white/gray) output from the MR1 power harness to the B-H1909 Front Speaker Harness .

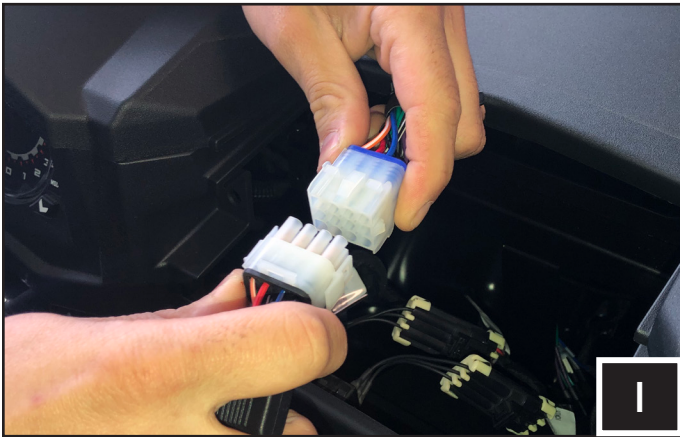

I. Connect the MR1 power harness to the radio harness. Plug in the provided universal antenna (B-H1249) if the vehicle does not have an antenna.

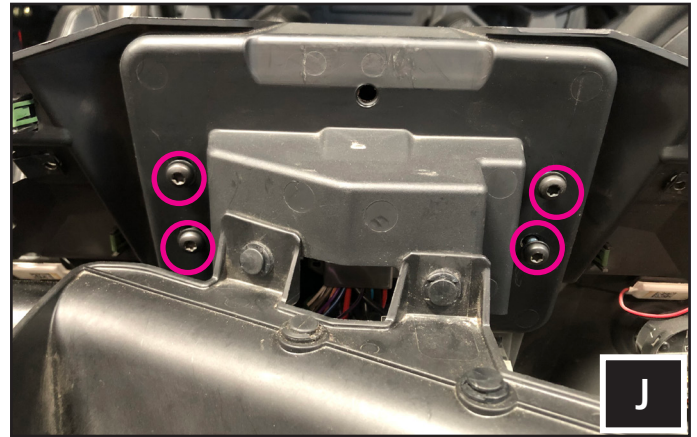


J. From the backside the dash panel, fasten (4) M6 T30 torx screws and washers through the dash and into the DMR1 mounting bracket.



M. Place the assembled RZ5-DMR1 into the dash cavity. It is necessary to angle in one side at a time so that the bracket clears the cavity allowing the dash kit to rest flush. Now complete this step by fully tightening the screws left loose in Step D.




L. Fasten the (4) dash screws center the trim ring on the MR1 and firmly press down until each side and corners click into place. Replace all factory panels.

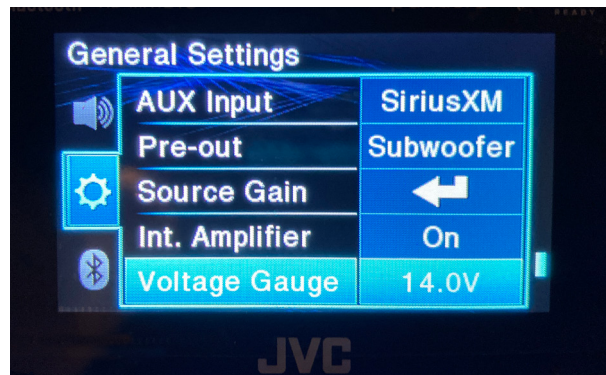

Once the MR1 is powered on, verify the following presets in the General Settings: Int. Amplifier = On

JVC MR1 WIRING DIAGRAM

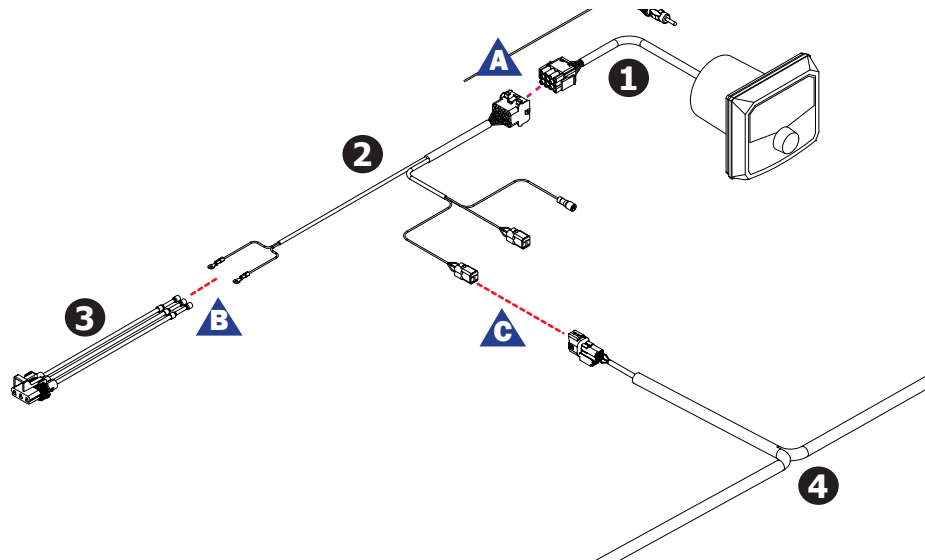

	Description	Part #
①	JVC Harness Adapter, JVC to SSV	B-H2367
②	JVC MR1 Radio Harness	
③	Pulse Connector Power Harness	B-H1752
④	Audio "Y" Speaker Harness	B-H1909

Detail	Description
A	Connect JVC MR1 radio harness to B-H2367
B	Crimp B-H2367 to B-H1752. Red to Red for ACC Power and Red to Yellow for Constant Power.
C	Connect B-H2367 Front Output to B-H1909 Front Speaker Harness

SPEAKER DASH POD PARTS LIST

PARTS LIST IMAGES



Speaker Dash Pod, Drive Side



Speaker Dash Pod, Passenger Side



SSV Works A-Spec Speakers
(pre-mounted)



2mm Self Adhesive Speaker Gasket
(x2)




Driver and Passenger Side Brackets



T Brackets



P and D Bracket Hardware Pack,
M6x12mm [B-HPM612-4]



T Brackets Hardware Pack, M6x16mm
[B-HPM616-4C]




#14 x .75" Phillips Screw
[B-HP#14-4]



M6x1 x 16mm Screw and Washer Pack
[B-HP3503]



#7x1.25" Speaker Screw Pack
[B-HP#7-8]



RGB Pigtail [B-H3380]

SPEAKER DASH POD INSTALLATION


TOOLS NEEDED FOR INSTALLATION

- T30 Torx Driver


- Phillips Screw Driver



A. Start by removing the front fenders.

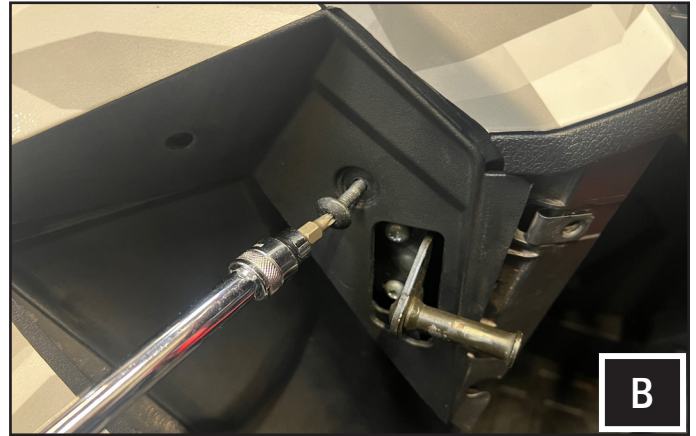


B. Remove the screw holding the door latch panel.

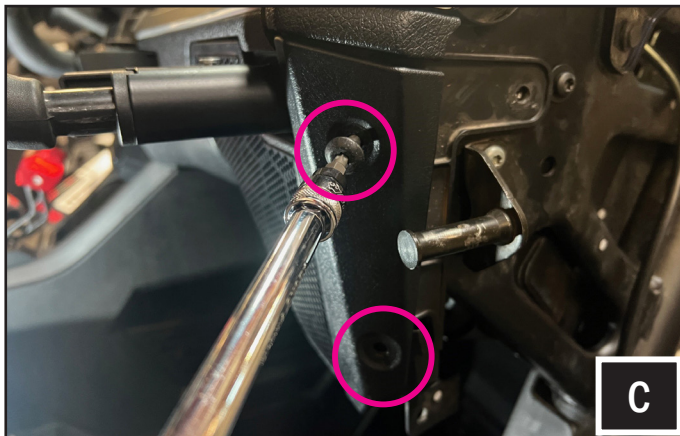

C. Remove the factory speaker grill by removing the (2) screws on the side.



D. Attach the self adhesive speaker gasket and mount the speakers to the dash pods using (8) #7x1.25" screws [B-HP#7-8].

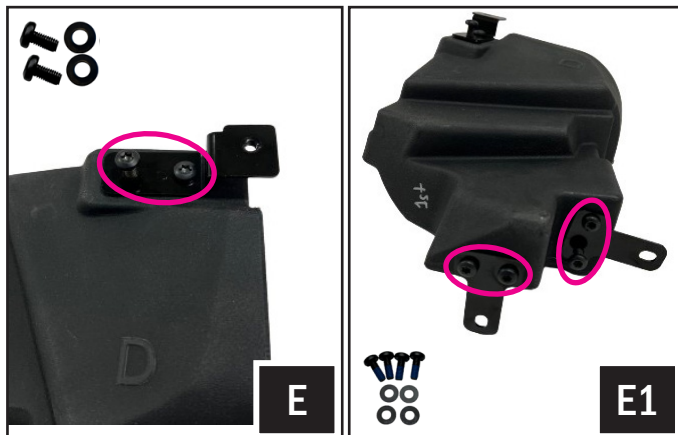

E. Secure the "D" bracket to the drive side dash pod using (2) M6x12mm screws and washers [B-HPM612-4].

E1. Use (4) M6x16mm screws and washers [B-HPM616-4C] to secure the T-brackets.




F. Secure the "P" bracket to the passenger side dash pod using (2) M6x12mm screws and washers [B-HPM612-4].


F1. Use (4) M6x16mm screws and washers [B-HPM616-4C] to secure the T-brackets.



G. Slide up the RZR kick pod under the dash.

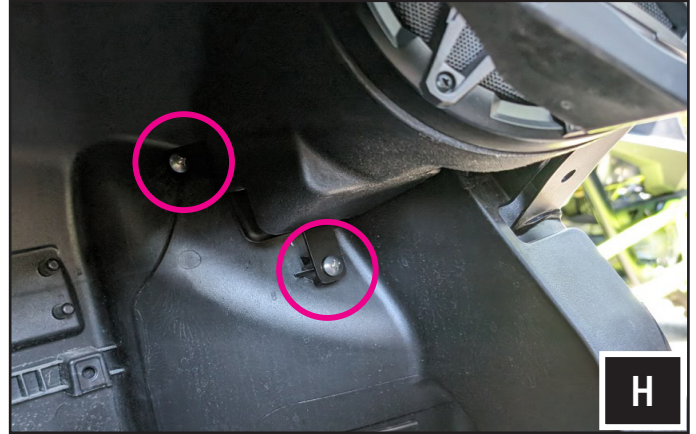

H. Secure the T brackets of each pod to the factory bosses on the footwell using (2 each) #14x.75 phillips screws [B-HP#14-4].

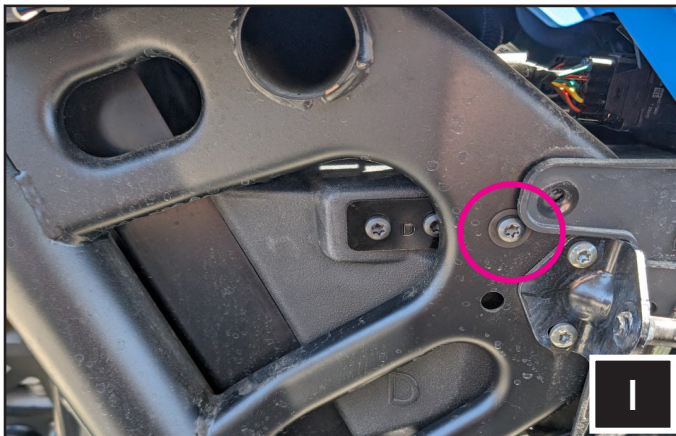


I. Secure the D (driver) and P (passenger) pod brackets to the vehicle frame using (2) M6x16 screws [B-HP3503] circled above.

*****Test the system for functionality before reassembling the panels*****



J. Reinstall the factory driver and passenger side speaker grill using the factory screws.

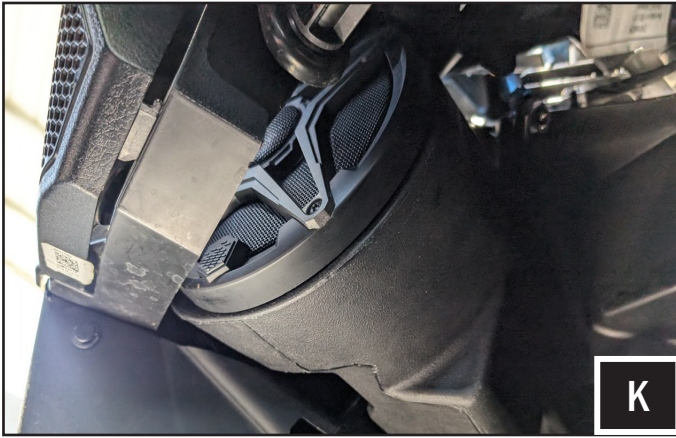

K



K

K. Completed installation of driver and passenger side of SSV Works RZR 6.5" dash pods.



L

L. Reinstall the front fenders.

THANK YOU!

We are committed to your satisfaction and we know you will enjoy our products. If you have questions or need any assistance, please let us know.

SSVWORKS.COM
 1-818-991-1778 EXT 2
SUPPORT@SSVWORKS.COM

Returns must be made within 30 days of purchase date. Claims for missing items or items damaged in transit must be received within five business days of receipt of merchandise. All returns must be in original packaging and in re-sellable condition. Shipping fees are not refundable.