



UTL-TWTR

SSV Works Universal Tweeter Cage Pod
with 25mm Silk Dome Tweeter

WARRANTY INFORMATION:

All SSV Works enclosures are covered by a limited lifetime warranty against defects in material or workmanship. All SSV Works Electronics are covered by a limited 1 year warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. Contact SSV Works for further warranty information.

SPECS:

TWEETER SIZE: 25MM SILK DOME

POWER: 50 WATTS RMS / 100 WATTS PEAK

IMPEDANCE: 4 OHMS

SENSITIVITY: 88 dB

CROSSOVER: 5.5 kHz, 12 dB/Oct

FREQUENCY RESPONSE: 1.5 kHz to 20 kHz



PARTS LIST



Universal Tweeter Cage Pod
(pair)



Front Speaker Audio &
RGB "Y" Harness (x2)



Cage Clamps Pairs
(1.5", 1.75", 1.85", 2")




Cage Pod Swivel Mount
and 2mm Allen Wrench



M6x45mm Socket Head
Screw and Fat Washer (x2)

WIRING CONNECTION

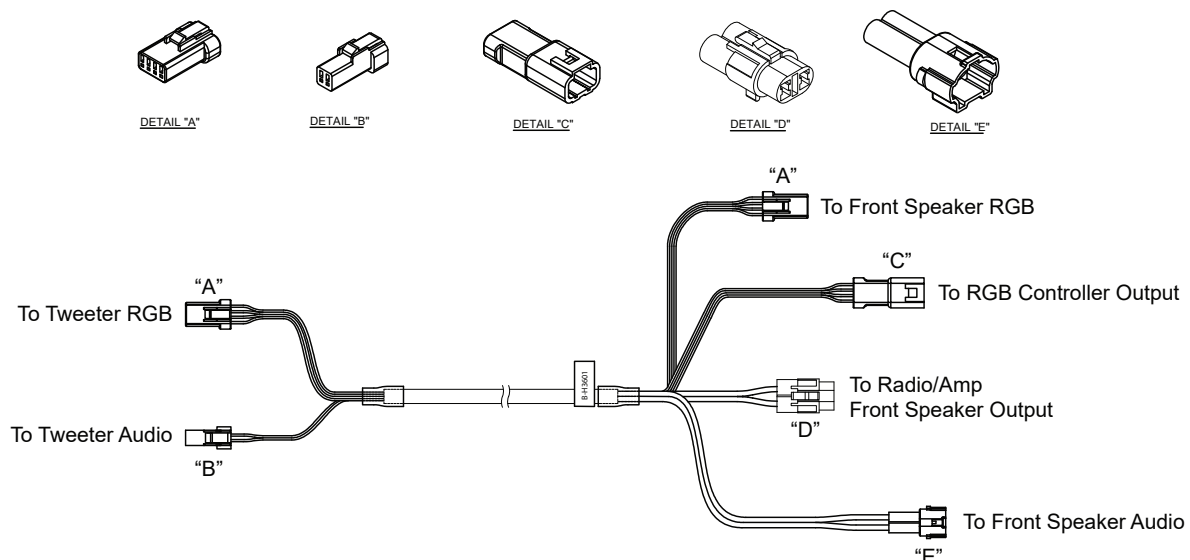

UNIVERSAL TWEETER CAGE POD INSTALLATION



A. Select the correct cage clamp size. Wrap the cage tube with plastic to prevent scratching.



B. Slide in the clamp on the cage tube and remove the plastic.




C. Install the swivel mount to the clamp using the M6 allen socket head bolt and washer with a 5mm allen key. Do not fully tighten yet.



D. Insert the tweeter pod post into the swivel mount and loosely tighten the set screw using the provided 2mm Allen wrench.



E. Adjust the tweeter pod to the desired angle and fully tighten the set screw and M6 allen socket head bolt.

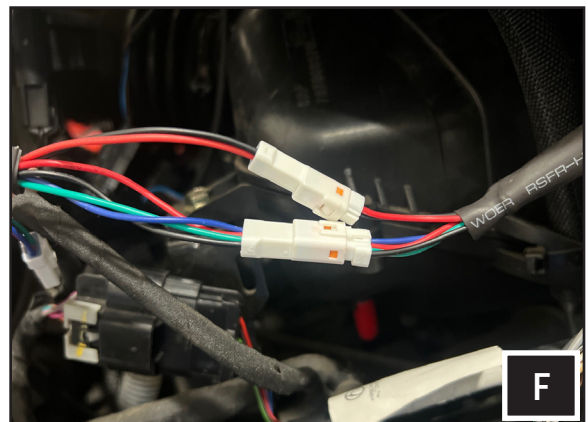

F. Make the audio and RGB connections to the tweeters and front speakers using the "Y" harness included in the kit.