

EUPHORIA™

XPERT™
NEODYMIUM SERIES

EXM8N-CFV2 / 600 WATTS
8" NEO CARBON FIBER MIDRANGE

FEATURES

- 8" Neo Carbon Fiber midrange
- 2.0" (51mm) Midrange Voice Coil
- Neodymium Ring Magnet Assembly
- IP65 Rated Weather Resistant Carbon Fiber Cone
- Die-Cast Aluminum Basket with Radial Venting

SPECIFICATIONS




- Power Handling AES: 300 Watts
- Dynamic Wattage: 600 Watts
- Frequency Response: 50Hz - 13KHz
- Sensitivity (1w/1m): 99.8dB
- Impedance: 4Ω

DIMENSIONS

- Overall Diameter: 8.29" / 210.50 mm
- Mounting Depth: 3.29" / 83.50 mm
- Cutout Diameter: 7.09" / 180 mm

THIELE-SMALL PARAMETERS

- | | |
|--------------------------------------|---------|
| • Resonant Frequency (FS) | 90 Hz |
| • D.C. Voice coil resistance (RE) | 3Ω |
| • Mechanical Quality Factor (QMS) | 4.35 |
| • Electrical Quality Factor (QES) | 0.72 |
| • Toatal Quality Factor (QTS) | 0.62 |
| • Equivalent Air Volume to Cms (VAS) | 11.5L |
| • Mechanical Compliance (Cms) | 18 mm/N |
| • Sensitivity (1W/1M) | 99.8dB |

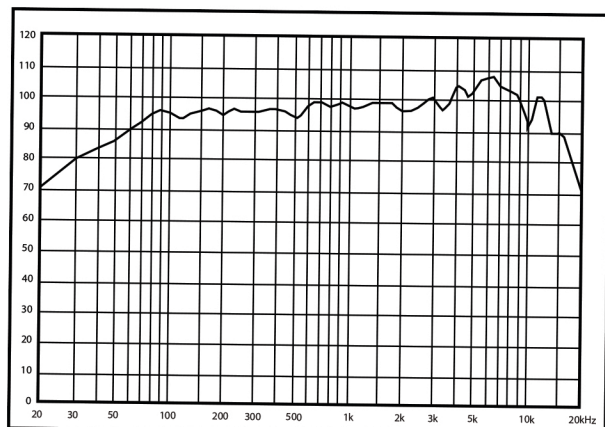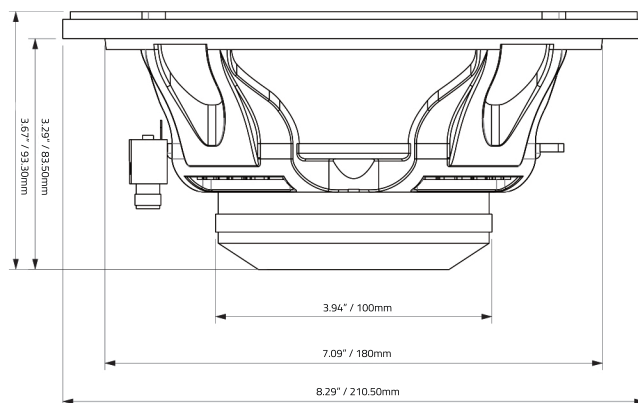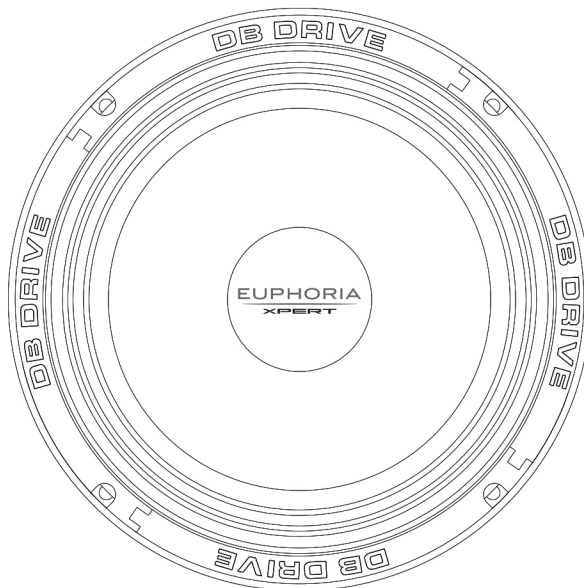

Euphoria is a Registered Trademark
of DB Research L.L.P.
Designed and Engineered in the U.S.A.