



INSTALLATION INSTRUCTIONS FOR PART 99-7521B

APPLICATIONS


Mazda 5 2012-up 99-7521B

KIT FEATURES

- ISO DIN head unit provision with pocket
- *Painted scratch-resistant Matte Black*

KIT COMPONENTS

- A) Radio Housing • B) Radio Brackets • C) Pocket • D) (4) #8 x 3/8" Phillips Screws

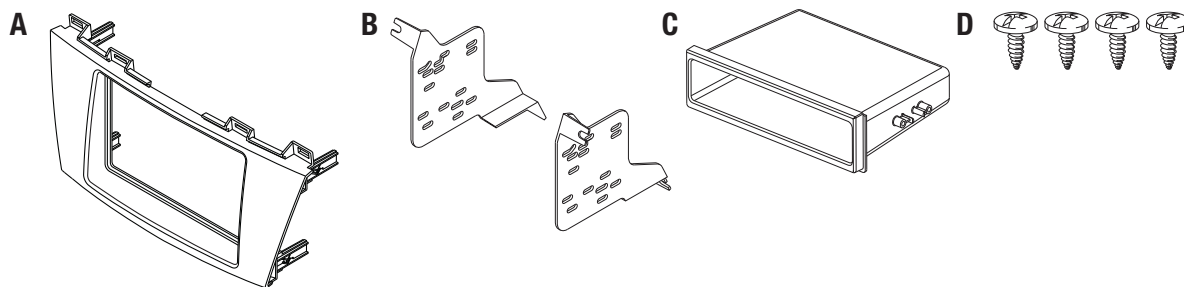

WIRING & ANTENNA CONNECTIONS (Sold Separately)

Wiring Harness:


- 70-7903 - Mazda harness

Antenna Adapter:

- 40-HD10 - Honda antenna adapter

TOOLS REQUIRED

Panel Removal Tool • Phillips Screwdriver • Socket Wrench



REV. 11/7/11

METRA. THE WORLD'S BEST KITS.™



1-800-221-0932



metraonline.com

© COPYRIGHT 2004-2011 METRA ELECTRONICS CORPORATION



99-7521B

Table of Contents

Dash Disassembly

– Mazda 5 2012-up.....3-5

Kit Assembly

– ISO DIN head unit provision with pocket 6

Caution

Metra recommends disconnecting the negative battery terminal before beginning any installation. All accessories, switches, and especially air bag indicator lights must be plugged in before reconnecting the battery or cycling the ignition.

****NOTE: Refer also to the instructions included with the aftermarket radio.***



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.




**Metra recommends MECP
certified technicians**


Dash Disassembly

1. Unclip and remove the cup holder panel in the center console. (Figure A)
2. Unclip and remove the small pocket panel on the back of the center console behind shifter. (Figure B)
3. Remove (2) 8mm bolts under cup holder panel holding the back half of the center console to the front half. (Figure C)
4. Unscrew and remove the shift knob. (Figure D)


Continued on next page

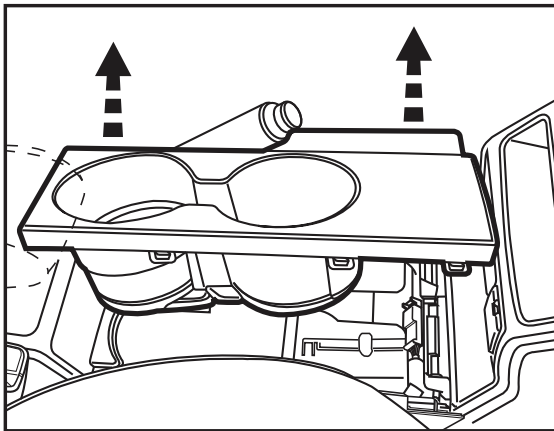


(Figure A)

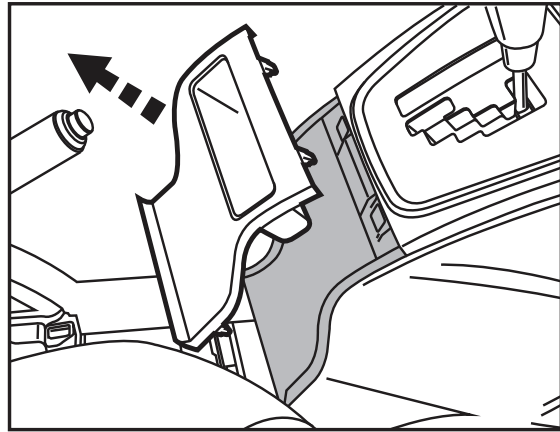

(Figure B)

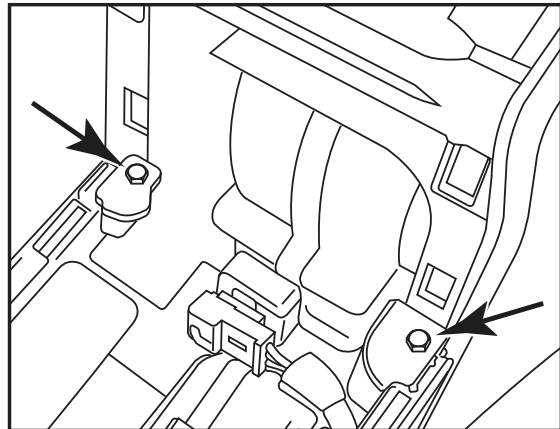

(Figure C)

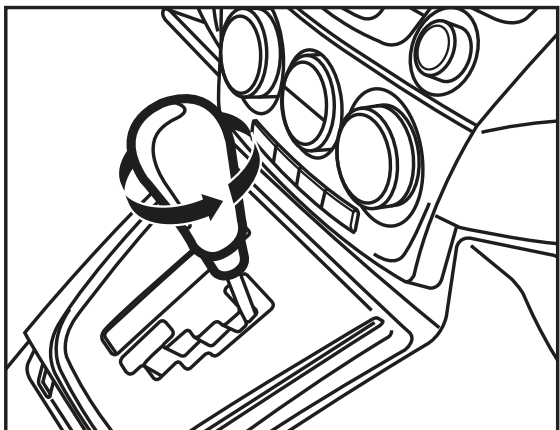


(Figure D)


Dash Disassembly

5. Unclip and remove the shifter trim panel. (Figure D)
6. Slide both seats forward and remove (2) Phillips screws on each side of the center console under the screw covers. (Figure E)
7. Unclip and pull back the panels at the lower front sides of the center console. (Figure F)
8. Remove (2) Phillips screws from both sides (total of 4) of the front lower half of the center console. (Figure G)


Continued on next page

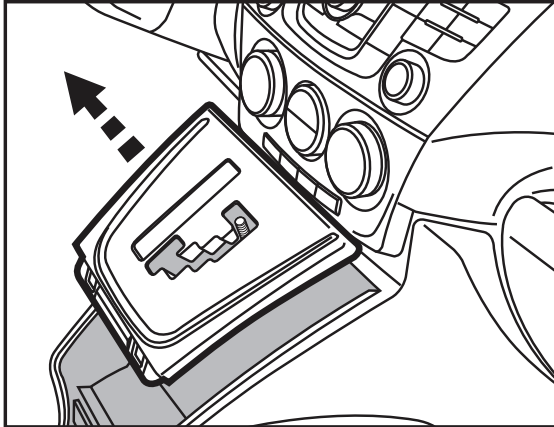


(Figure D)

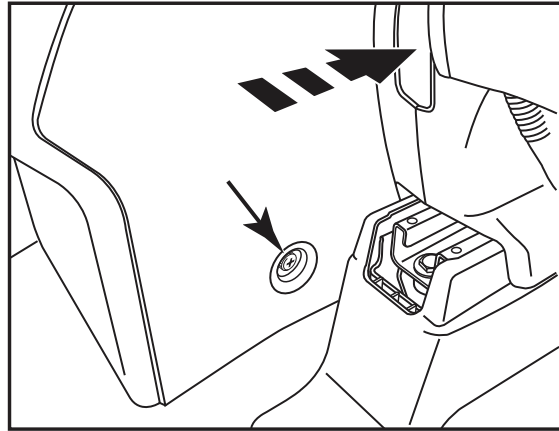

(Figure E)

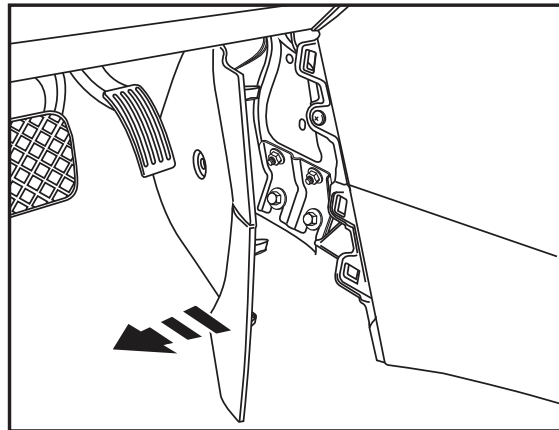

(Figure F)

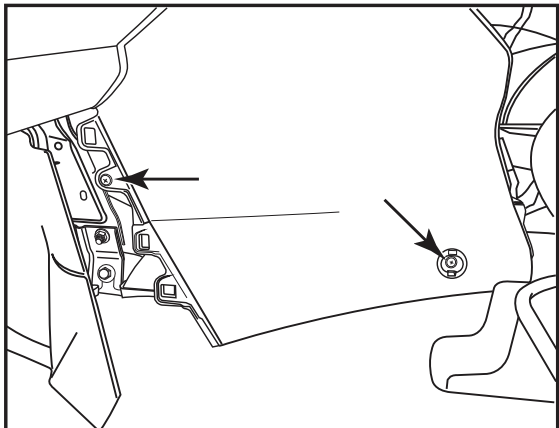


(Figure G)


Dash Disassembly

9. Unclip and remove the vent panel including the hazard switch above the factory radio. (Figure H)
10. Unclip the entire center console and slide it towards the rear of the vehicle to gain access to the (2) Phillips screws on the bottom of the a/c control. (Figure I)
11. Remove the (2) Phillips screws from the a/c control then unclip and remove the control. (Figure J)
12. Remove (3) Phillips screws and (1) 10 mm bolt securing the radio. (Figure K)


Continue to kit assembly

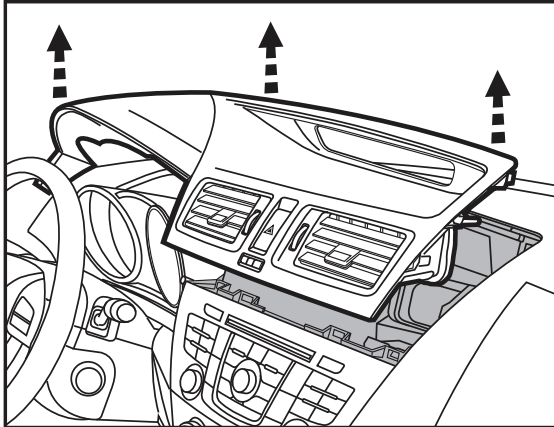


(Figure H)

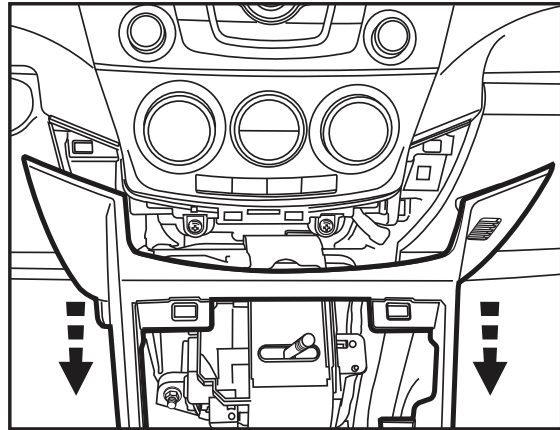

(Figure I)

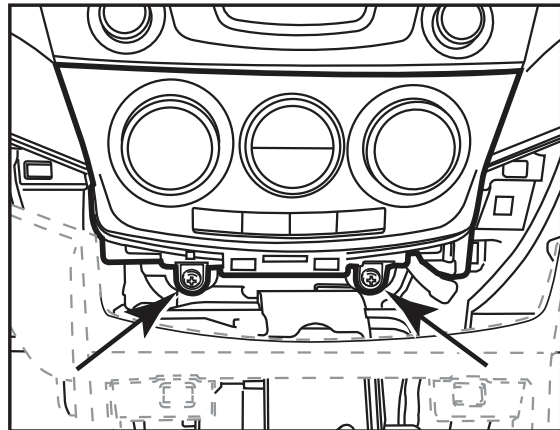

(Figure J)

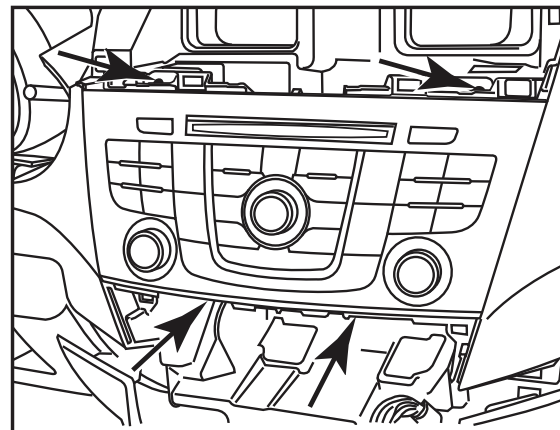


(Figure K)




Kit Assembly 99-7521B

ISO DIN head unit provisions

1. Mount the pocket to the brackets using the supplied (4) #8 x 3/8" Phillips screws. (Figure A)
2. Mount the radio to the pocket/brackets with the screws supplied with the unit. (Figure A)
3. Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter from Metra or AXXESS. Test the unit for proper operation.
4. Mount the radio/pocket assembly into the dash. (Figure B)
5. Install the radio trim panel over the radio/pocket assembly and reassemble dash in reverse order of disassembly.

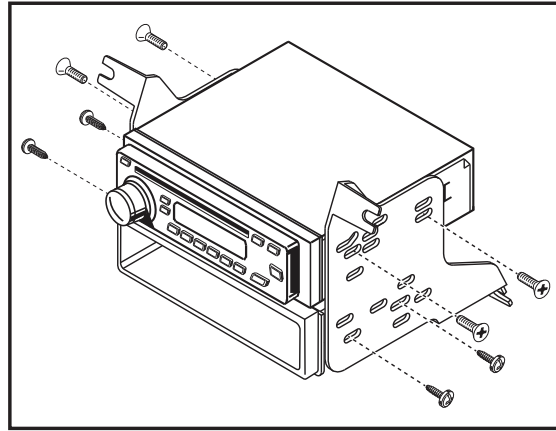

(Figure A)

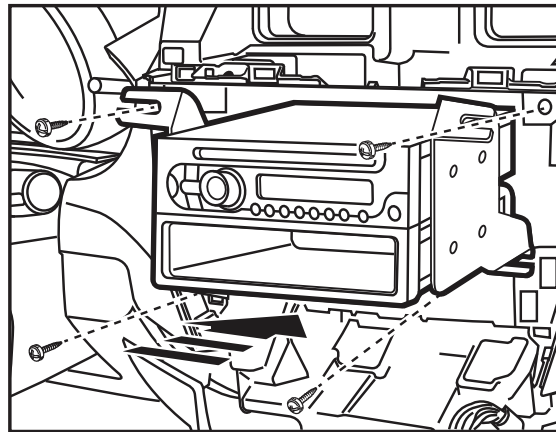

(Figure B)



INSTALLATION INSTRUCTIONS FOR PART 99-7521B

REV. 11/7/11

METRA. THE WORLD'S BEST KITS.™



1-800-221-0932



metraonline.com

© COPYRIGHT 2004-2011 METRA ELECTRONICS CORPORATION