



INSTALLATION INSTRUCTIONS FOR PART 99-7609G

APPLICATIONS

INFINITI I30 2000-2001
INFINITI I35 2002-2004

99-7609G









KIT FEATURES

- DIN Head Unit Provision w/ Pocket
- ISO DIN Head Unit Provision w/ Pocket
- DDIN Head Unit Provision
- ISO Stacked Head Unit Provision
- Painted Gray to Match Factory Color & Finish



KIT COMPONENTS

- A) Radio Housing • B) Radio Housing Brackets • C) ISO Brackets • D) ISO Trim Plate
- E) DDIN Brackets • F) DDIN Trim Plate • G) Snap-In Pocket • H) (4) #8 x 3/8" Phillips Screws



WIRING & ANTENNA CONNECTIONS

(Sold Separately)

WIRE HARNESS:



- 70-7551 1995-up Nissan Amp Integration Harness

ANTENNA ADAPTER:

- 40-NI10 Nissan to Aftermarket Radio Antenna Adapter

TOOLS REQUIRED

Phillips Screwdriver • Panel Removal Tool • Socket Wrench



METRA. THE WORLD'S BEST KITS.™



1-800-221-0932



metraonline.com

© COPYRIGHT 2004-2010 METRA ELECTRONICS CORPORATION



99-7609G

TABLE OF CONTENTS

DASH DISASSEMBLY

- **INFINITI I30 2000-01 / I35 2002-04 1**

KIT PREPARATION

- **INFINITI I30 2000-01 / I35 2002-04 2**

KIT ASSEMBLY

INFINITI I30 2000-01 / I35 2002-04

- **DIN HEAD UNIT PROVISION 3**
- **ISO DIN HEAD UNIT PROVISION 4**
- **DDIN / STACKED ISO DIN HEAD UNIT PROVISION 5**

CAUTION: Metra recommends disconnecting the negative battery terminal before beginning any installation. All accessories, switches, and especially air bag indicator lights must be plugged in before reconnecting the battery or cycling the ignition.

NOTE: Refer Also to the instructions included with the aftermarket radio.



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.




Metra recommends MECP certified technicians

99-7609G DASH DISASSEMBLY


Infiniti I30 2000-01 / I35 2002-04

- 1** Disconnect the negative battery terminal to prevent an accidental short circuit.
- 2** Unclip and remove the a/c vents above the radio. (Fig. A)
- 3** Unclip and remove the shifter panel surrounding the shifter. (Fig. B)
- 4** Remove (4) Phillips screws securing the radio/climate control/ashtray assembly. (Fig. C)
- 5** Remove (8) Phillips screws securing the climate control and ashtray to the assembly. (Fig. D)


A

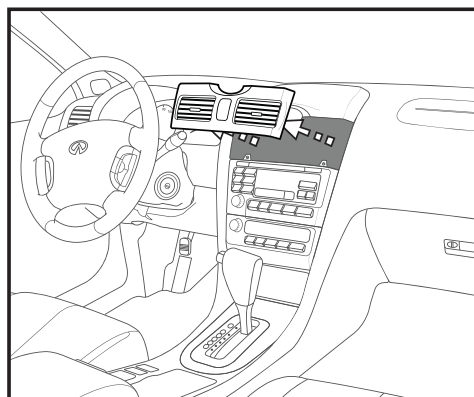


B

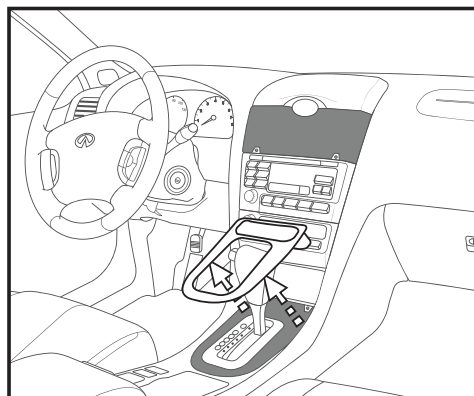

C

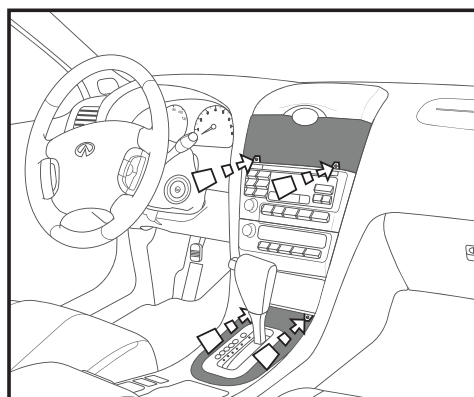

D

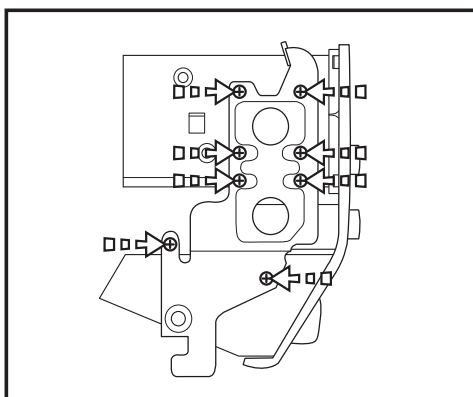

Continue to Kit Preparation




99-7609G KIT PREPARATION


Infiniti I30 2000-01 / I35 2002-04

- 1** Attach the radio housing brackets to the radio housing using the supplied (4) Phillips screws. (Fig. A)
- 2** Secure the climate control to the radio housing bracket assembly using the factory hardware. (Fig. B)
- 3** Attach the ashtray to the radio housing bracket assembly using the factory hardware. (Fig. B)

A

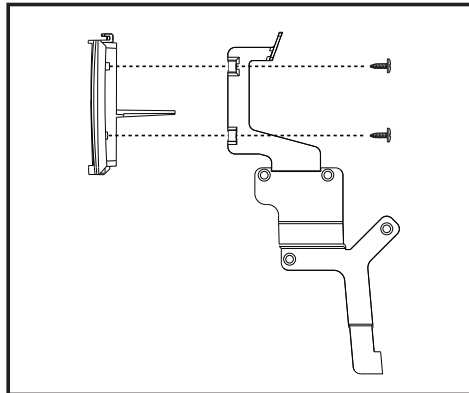

B

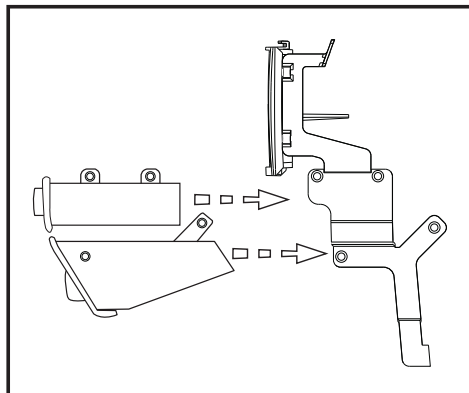


Continue to Kit Assembly

99-7609G KIT ASSEMBLY


Infiniti I30 2000-01 / I35 2002-04 DIN HEAD UNIT PROVISION

- 1** Slide the DIN cage into the Radio Housing and secure by bending the metal locking tabs down. (Fig. A)
- 2** Snap the pocket into the bottom opening of the radio housing. (Fig. B)
- 3** Slide the aftermarket head unit into the cage and secure. (Fig. C)
- 4** Locate the factory wiring harness and antenna plug in the dash. Metra recommends using the proper mating adapters from Metra and/or AXXESS.
- 5** Reassemble dash in reverse order of disassembly.


A

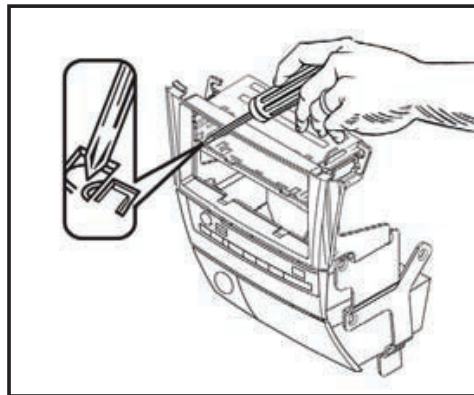

B

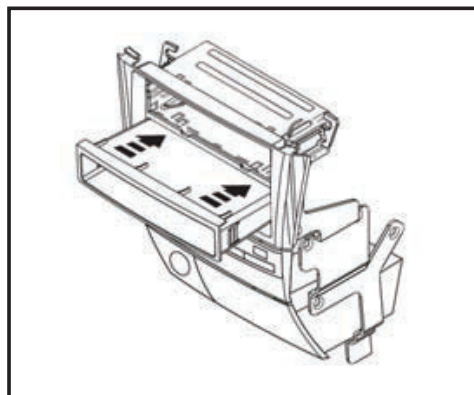

C

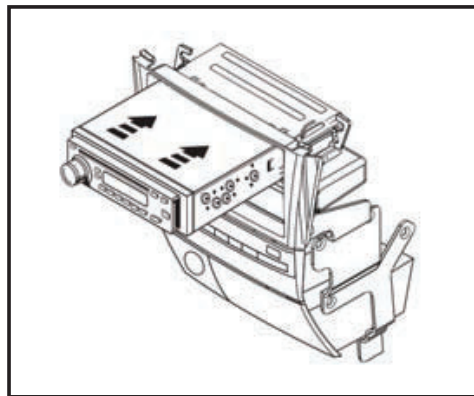


99-7609G

Infiniti I30 2000-01 / I35 2002-04


ISO DIN HEAD UNIT PROVISION

- 1** Mount the ISO Brackets to the head unit with the screws supplied with the unit. (Fig. A)
- 2** Snap the pocket into the bottom opening of the radio housing. (Fig. B)
- 3** Slide the head unit into the radio opening until the side clips engage. (Fig. B)
- 4** Snap the Trim plate into the Radio Housing. (Fig. C)
- 5** Locate the factory wiring harness and antenna plug in the dash. Metra recommends using the proper mating adapters from Metra and/or AXXESS.
- 6** Reassemble dash in reverse order of disassembly.


A

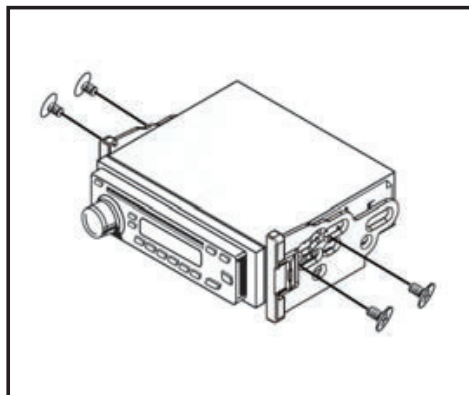

B

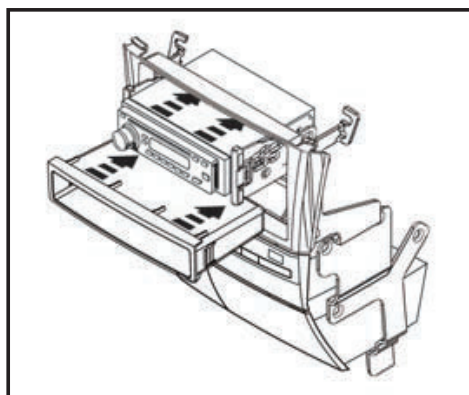

C

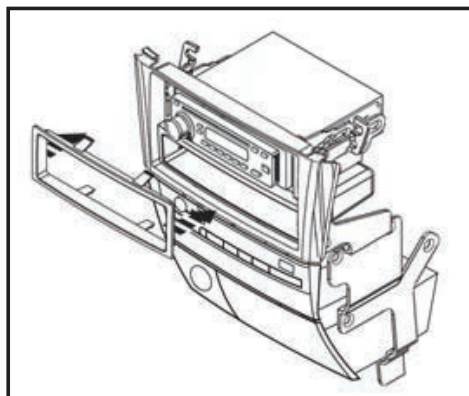


99-7609G

**Infiniti I30 2000-2001
Infiniti I35 2002-2004**


DDIN / STACKED ISO HEAD UNIT PROVISION

- 1** Cut and remove the center bar from the radio housing. (Fig. A)
- 2** Snap the Double DIN brackets to the inside edge of the Double DIN trim plate. (Fig. B)
- 3** Slide the Double DIN head unit or stacked ISO head units into the bracket/radio housing assembly and secure the Double DIN head unit or stacked ISO head units to the assembly using the screws supplied with the radio. (Fig. C)
- 4** Snap the double DIN trim plate into the radio housing. (Fig. C)
- 5** Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter from Metra or AXXESS. Re-connect the negative battery terminal and test the unit for proper operation.
- 6** Reassemble dash in reverse order of disassembly.


A

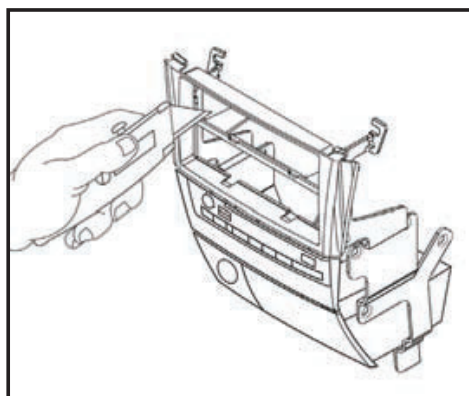

B

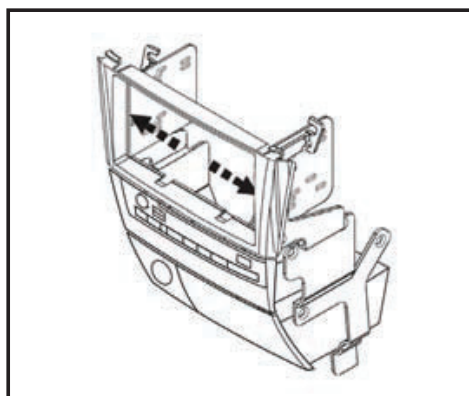

C

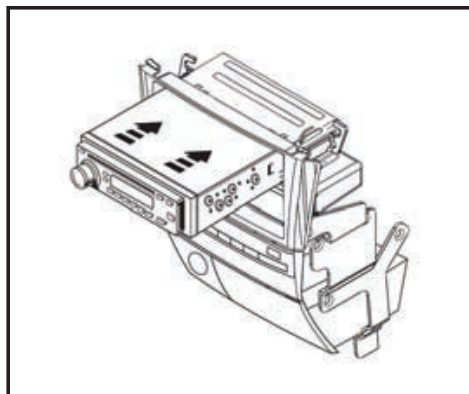



INSTALLATION INSTRUCTIONS FOR PART 99-7609G

REV. 3/18/2011

METRA. THE WORLD'S BEST KITS.™



1-800-221-0932



metraonline.com

© COPYRIGHT 2004-2010 METRA ELECTRONICS CORPORATION