



Nissan Multi-Kit 2007-2015

Visit MetraOnline.com for more detailed information about the product and up-to-date vehicle specific applications


APPLICATIONS

Nissan

Juke	2011-2014	Rogue Select	
Rogue	2011	(w/lower model radio)	2014-2015
Rogue S	2012-2013	Versa	2007-2013
Rogue SV (w/SL package)	2012-2013	Versa S	2014
		Versa S+	2014
		Versa SV base	2014

KIT COMPONENTS

- A) Radio housing • B) Bracket set A • C) Bracket set B • D) ISO DDIN trim plate • E) #8 x 3/8" Phillips screws (4)

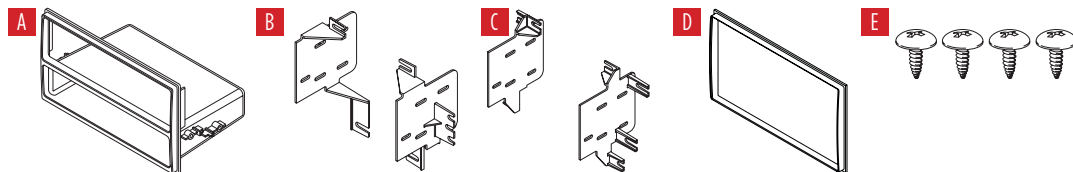

KIT FEATURES

- ISO DIN radio provision with pocket
- ISO DDIN radio provision

TABLE OF CONTENTS

Dash Disassembly	3-5
Kit Assembly	
ISO DIN radio provision with pocket	6
ISO DDIN radio provision	6-7
(See page 2 for Table of Contents by model)	

WIRING & ANTENNA CONNECTIONS (sold separately)

Wiring Harness: • 70-7552

Antenna Adapter: • 40-N112

Visit Metraonline.com or AxxessInterfaces.com for harness and interface options.

TOOLS REQUIRED

- Panel removal tool
- Phillips screwdriver
- Cutting tool

ATTENTION: With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections, especially the air bag indicator lights, are plugged in before reconnecting the battery or cycling the ignition to test this product.
NOTE: Refer also to the instructions included with the aftermarket radio.

DASH DISASSEMBLY

TABLE OF CONTENTS (cont.)


Nissan

Juke 2011-2014	2
Rogue 2011	3
Rogue S 2012-2013	3
Rogue SV (with SL package) 2012-2013	3
Rogue Select (with lower model radio) 2014-2015	3
Versa 2007-2013	4
Versa S 2014	5
Versa S+ 2014	5
Versa SV base 2014	5


Juke 2011-2014

For manual climate controls:

1. Lift up to remove the small knob on the slide for "recirc/ fresh air".
 2. Using the panel removal tool, carefully unclip and remove the trim from around the climate controls. (Figure A)
- Note:** Climate controls stay in the dash.
3. Remove (2) Phillips screws securing the radio trim panel. (Figure B)
 4. Remove (4) Phillips screws securing the radio, disconnect the wiring, and then remove the radio. (Figure C)

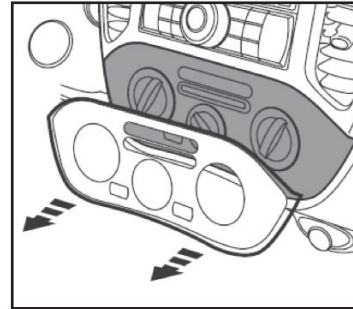

(Figure A-1)

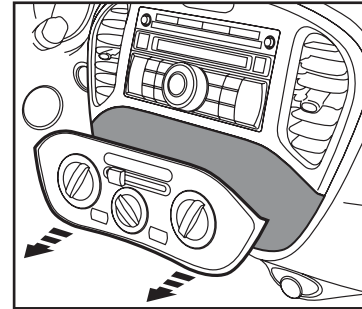


(Figure A-2)


Continue to Kit Assembly

For auto climate controls:

1. Using the panel removal tool, carefully unclip and remove the climate control panel. (Figure A-2)
2. Remove (2) Phillips screws securing the radio trim panel. (Figure B)
3. Remove (4) Phillips screws securing the radio, disconnect the wiring and then remove the radio. (Figure C)

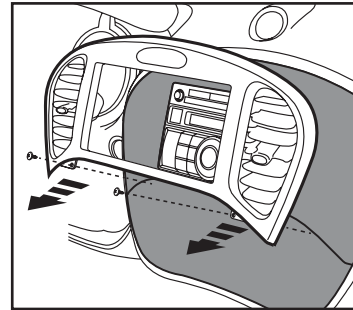

(Figure B)

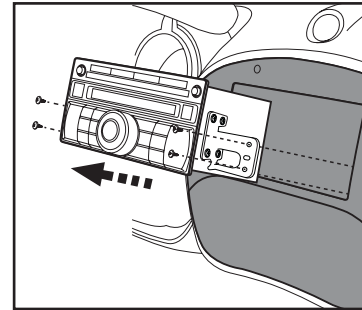

(Figure C)


Continue to Kit Assembly

DASH DISASSEMBLY


**Rogue 2011, Rogue S 2012-2013,
Rogue SV (with SL package) 2012-2013,
Rogue Select (with lower model radio) 2014-2015**

1. **If equipped with center speaker:** Using the panel removal tool, carefully unclip and remove the grille then remove (4) Phillips screws to remove the speaker. (Figure A)
2. Using the panel removal tool, unclip and remove the panel below the radio, including the A/C controls. (Figure B)
3. Unclip the radio trim, including the A/C vents, then unplug the hazard switch and remove the panel. (Figure C)
4. Remove (4) Phillips screws securing the radio, disconnect the wiring, and then remove the radio. (Figure D)


Continue to Kit Assembly

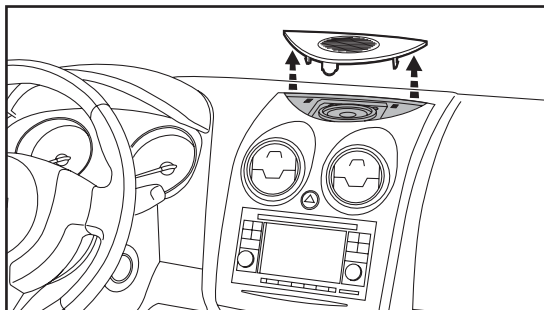


(Figure A)

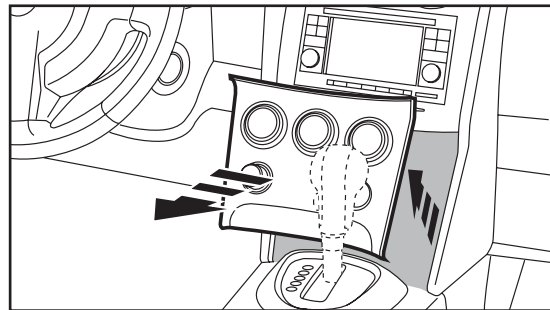

(Figure B)

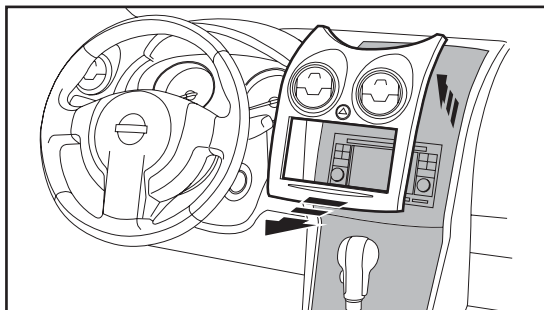

(Figure C)

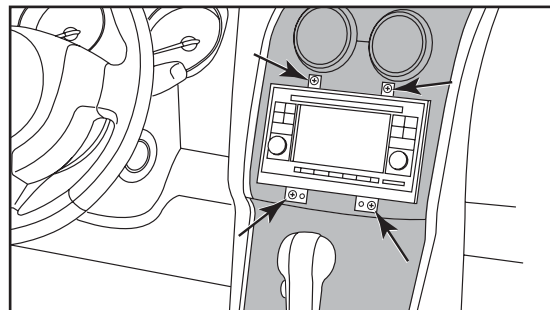


(Figure D)


DASH DISASSEMBLY

Versa 2007-2013


1. Using the panel removal tool, unclip and remove the panel above the radio. (Figures A and B)
2. Remove (2) Phillips screws securing the radio trim panel, and then unclip and remove the entire panel surrounding the radio, including the A/C vents. (Figure C)
3. Remove (4) Phillips screws securing the radio, disconnect the wiring, and then remove the radio. (Figure D)

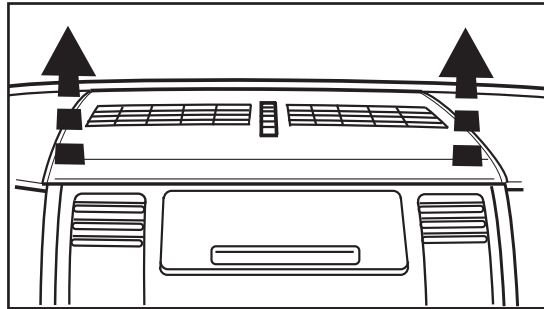


(Figure A)

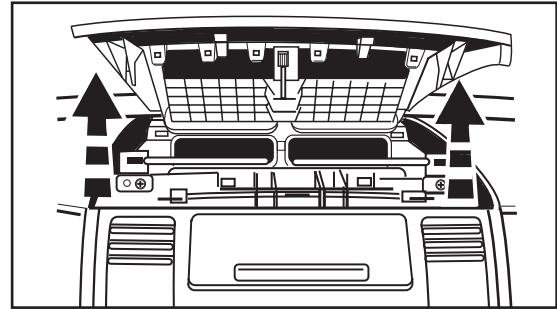

(Figure B)

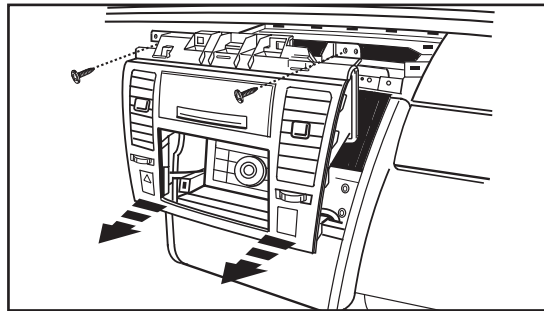

(Figure C)

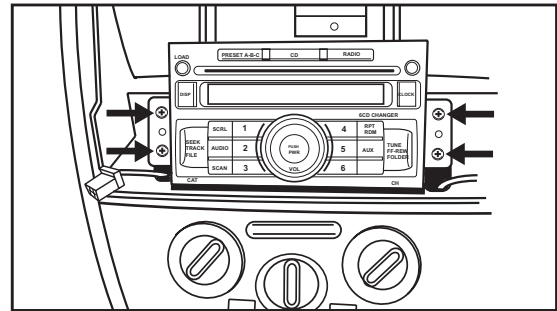

(Figure D)


Continue to Kit Assembly

DASH DISASSEMBLY


Versa 2012-2013, Versa S, Versa S+ 2014

1. Using the panel removal tool, carefully unclip and remove the entire panel surrounding the radio, including the A/C vents. (Figure A)
2. Remove (4) Phillips screws securing the radio, disconnect the wiring, and then remove the radio. (Figure B)

Continue to Kit Assembly

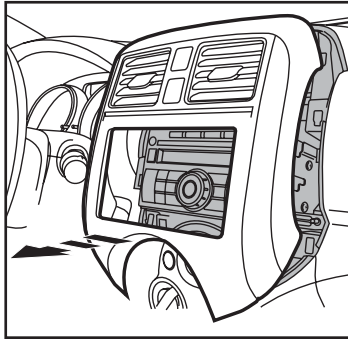

(Figure A)

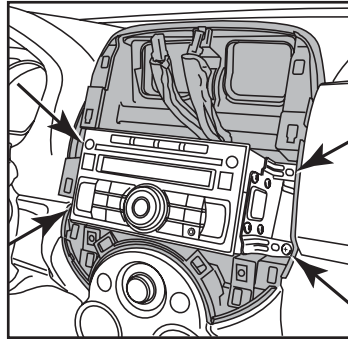


(Figure B)


KIT ASSEMBLY

ISO DIN radio provision with pocket


1. Choose the bracket that fits your vehicle and place it flush to the radio housing. Cut and remove the tabs that are not necessary to secure the brackets. (Figures A-1 and A-2)
2. Secure the modified brackets to the radio housing with the (4) 3/8" Phillips screws provided with this kit. (Figure B)
3. Remove the metal "DIN" sleeve and trim ring from the aftermarket radio.
4. Slide the radio into the bracket/housing assembly and secure using the screws supplied with the radio. (Figure B)
5. Locate the factory wiring harness and antenna connector in the dash. Metra recommends using the proper mating adapters from Metra and/or AXCESS.
6. Reconnect the negative terminal on the battery and test the aftermarket radio for proper operation.
7. Reassemble the dash in reverse order of disassembly to complete the installation.

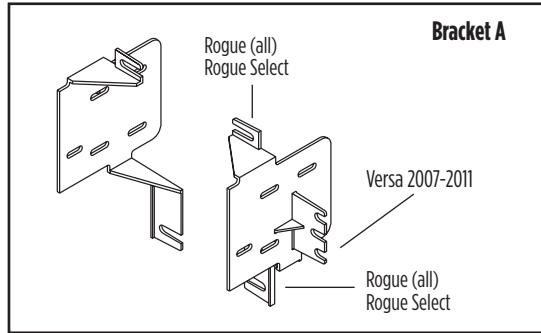

(Figure A-1)

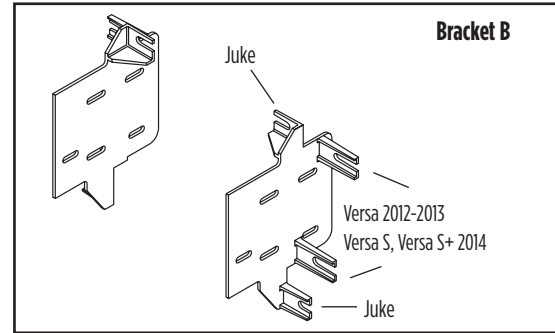

(Figure A-2)

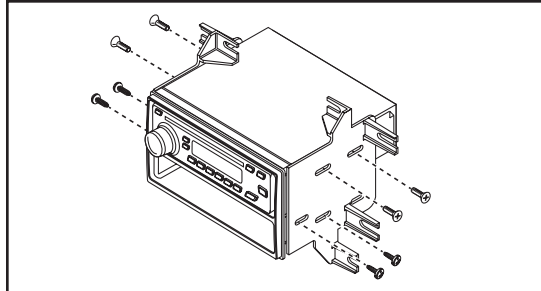

(Figure B)


KIT ASSEMBLY

ISO DDIN radio provision


1. Remove the brackets from the factory radio.
2. Secure the brackets to the aftermarket radio using the screws supplied with the aftermarket radio. (Figure A)

Note: The 99-7613 brackets can be used in place of the factory brackets. Refer to previous page for tab instructions.

3. Locate the factory wiring harness and antenna connector in the dash. Metra recommends using the proper mating adapters from Metra and/or AXXESS.
4. Reconnect the negative terminal on the battery and test the aftermarket radio for proper operation.
5. Attach the **ISO DDIN trim plate** to the front of the radio. (Figure B)
6. Using the (4) Philips screws, secure the radio into the dash.
7. Reassemble the dash in reverse order of disassembly to complete the installation.

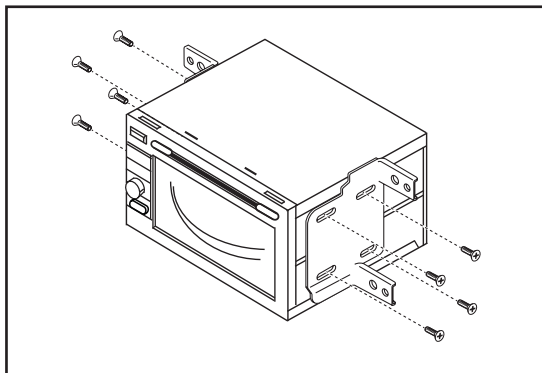

(Figure A)

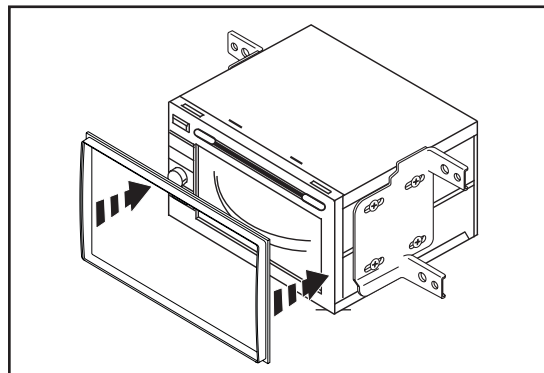

(Figure B)



99-7613
INSTALLATION INSTRUCTIONS



Having difficulties? We're here to help.



Contact our Tech Support line at:

386-257-1187



Or via email at:

techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 7:00 PM

Sunday: 10:00 AM - 4:00 PM



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.edu or call 386-672-5771 for more information and take steps toward a better tomorrow.



**Metra recommends MECP
certified technicians**



Product information sheet


U.S. PATENT # D704,697

APPLICATIONS

Nissan 2007-2015 99-7613


KIT FEATURES

- ISO DIN radio provision with pocket
- ISO DDIN radio provision

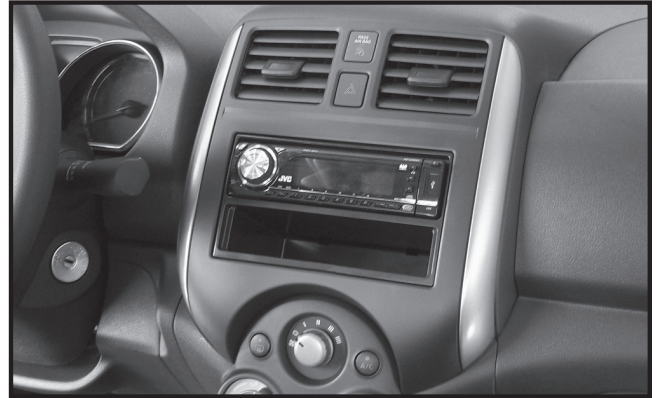

KIT COMPONENTS

- A) Radio housing • B) Bracket set A • C) Bracket set B • D) ISO DDIN trimplate • E) (4) #8 x 3/8" Phillips screws

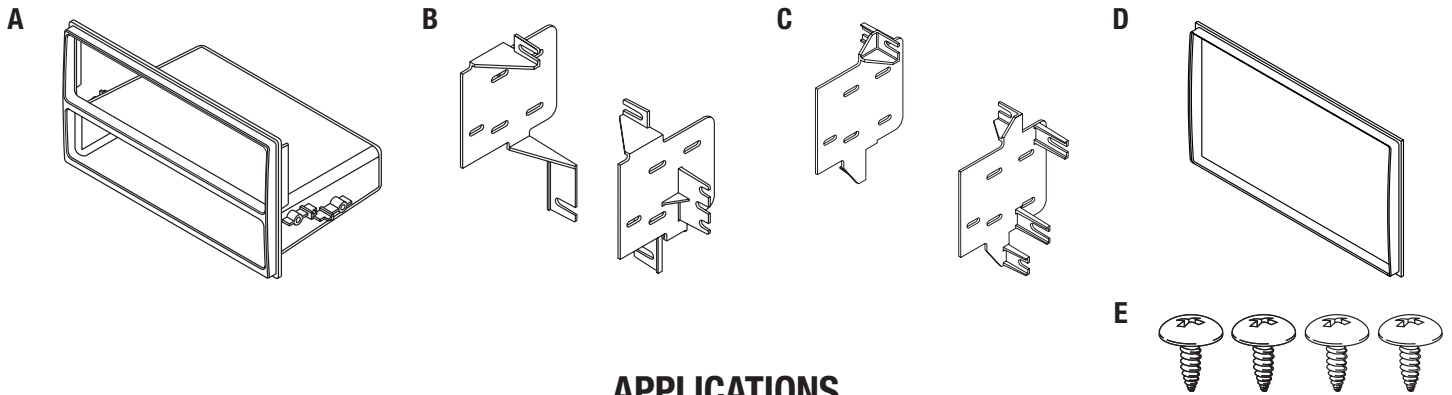

APPLICATIONS

Nissan		Rogue Select (with lower model radio) 2014-2015	
Juke	2011-2014	Versa	2007-2013
Rogue	2011	Versa S	2014
Rogue S	2012-2013	Versa S+	2014
Rogue SV (with SL package)	2012-2013	Versa SV base	2014

WIRING & ANTENNA CONNECTIONS (sold separately)

Wiring Harness: • 70-7552

Antenna Adapter: • 40-NI12

1-800-221-0932

METRA. THE WORLD'S BEST KITS.™

www.metraonline.com

© COPYRIGHT 2004-2016 METRA ELECTRONICS CORPORATION

REV. 12/3/2020 INFO99-7613