



INSTALLATION INSTRUCTIONS FOR PART 99-7616

APPLICATIONS

Nissan Rogue S (Special Edition), and SV models 2012-up 99-7616




KIT FEATURES

- ISO DIN head unit provision with pocket
- DDIN head unit provisions

KIT COMPONENTS

- A) Radio Trim • B) Radio Housing Brackets • C) Pocket • D) (4) #8 x 3/8" Phillips Screws

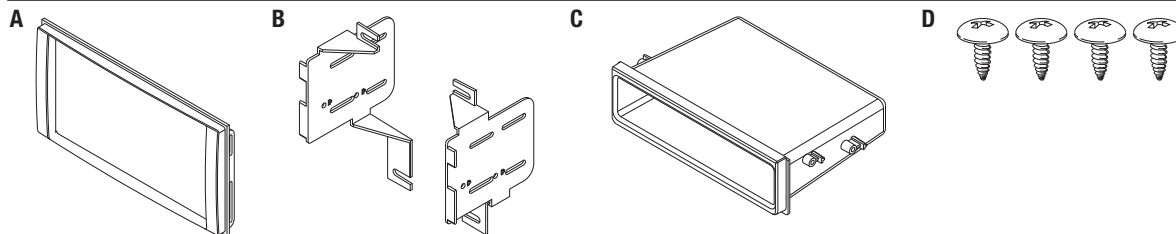

WIRING & ANTENNA CONNECTIONS (sold separately)

Wiring Harness: • 70-7552 2010-Up Nissan Harness

Antenna Adapter: • 40-NI12 2010-Up Nissan Antenna Adapter

TOOLS REQUIRED

- Panel removal tool • Phillips screwdriver • Socket Wrench

Table of Contents

Dash Disassembly

- Nissan Rogue S and SV 2012-up..... 2

Kit Assembly

- ISO DIN head unit provision with pocket..... 3
- DDIN head unit provisions 3

CAUTION: Metra recommends disconnecting the negative battery terminal before beginning any installation. All accessories, switches, and especially air bag indicator lights must be plugged in before reconnecting the battery or cycling the ignition.


NOTE: Refer to the instructions included with the aftermarket radio.




99-7616

Dash Disassembly

1. If equipped with center speaker:
Unclip and remove the grille then
remove (4) Phillips screws to
remove the speaker. (Figure A)
2. Unclip and remove the panel below
the radio including the a/c controls.
(Figure B)

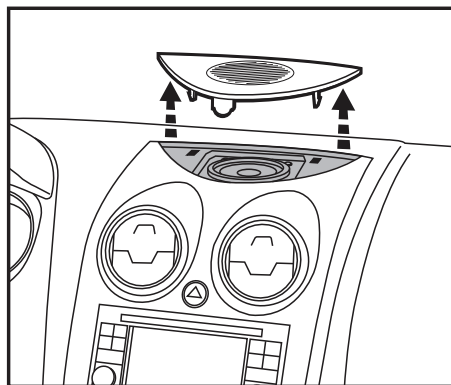


(Figure A)

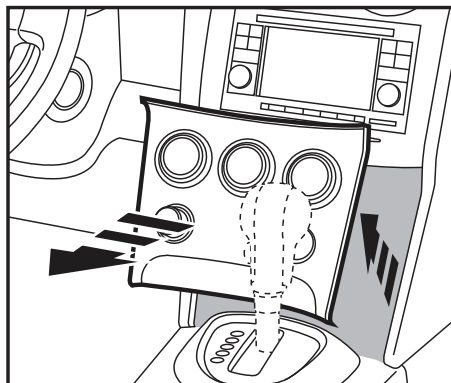


(Figure B)

3. Unclip the radio trim including the
a/c vents then unplug the hazard
switch and remove the panel.
(Figure C)
4. Remove (4) Phillips screws
securing the radio. (Figure D)

Continue to kit assembly

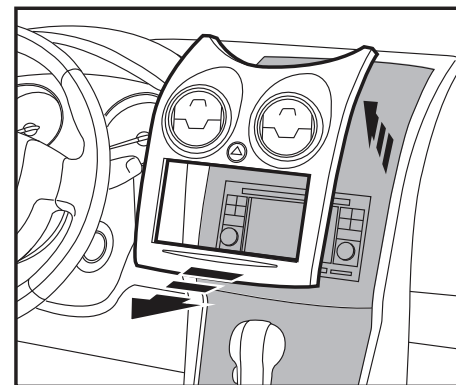

(Figure C)

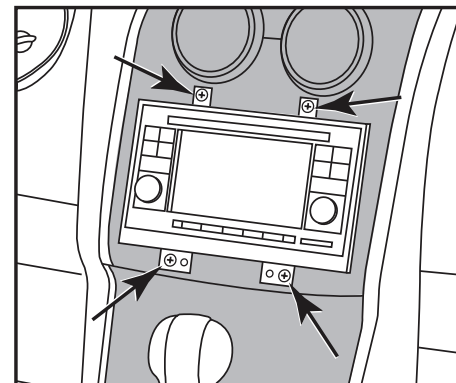

(Figure D)




99-7616

Kit Assembly


ISO DIN head unit provisions

Note: Cut and remove the center support out of the radio opening.


1. Attach the radio brackets to the radio trim. (Figure A)
2. Slide the pocket and aftermarket radio into the assembly (from behind) and secure with the screws supplied with the radio. (Figure B, Figure C)
3. Locate the factory wiring harness and antenna plug in the dash. Metra recommends using the proper mating adapters from Metra and/or AXXESS.
4. Reassemble dash in reverse order of disassembly.

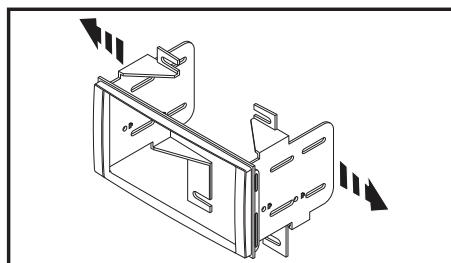

(Figure A)

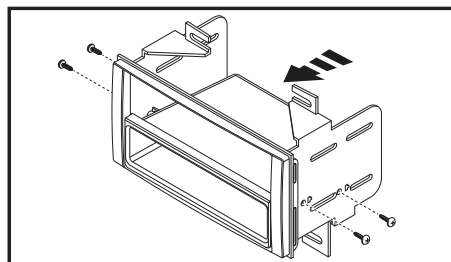

(Figure B)

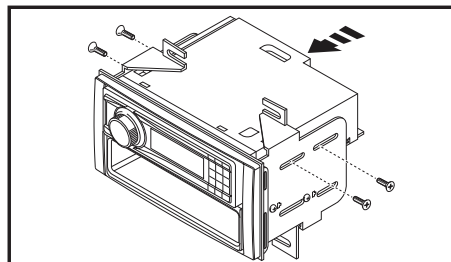


(Figure C)


Double DIN Head Unit Provisions:

Note: Cut and remove the center support out of the radio opening.

1. Attach the radio brackets to the radio trim. (Figure A)
2. Slide the aftermarket radio into the radio opening (from behind) and secure with the screws supplied with the radio. (Figure B)
3. Locate the factory wiring harness and antenna plug in the dash. Metra recommends using the proper mating adapters from Metra and/or AXXESS.
4. Reassemble dash in reverse order of disassembly.

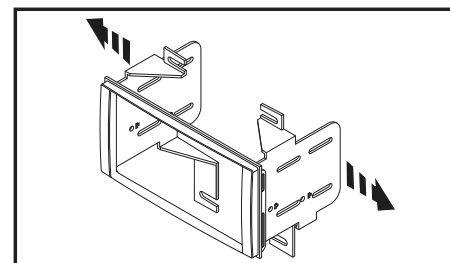

(Figure A)

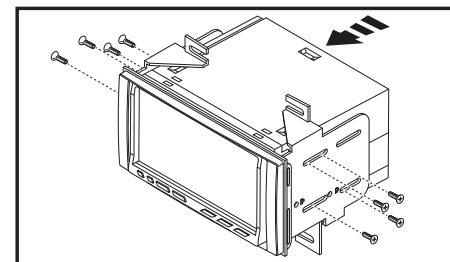

(Figure B)



INSTALLATION INSTRUCTIONS FOR PART 99-7616

REV. 11/27/2012 INST99-7616



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.



**Metra recommends MECP
certified technicians**

METRA. The World's best kits.™

1-800-221-0932

metraonline.com

© COPYRIGHT 2004-2011 METRA ELECTRONICS CORPORATION