



Installation instructions for part 99-7628BHG

Nissan Murano 2015-up 99-7628BHG


KIT FEATURES

- ISO DIN radio provision with pocket
- *Painted to match factory finish*



KIT COMPONENTS

- A) Radio housing trim panel • B) Radio brackets • C) Pocket • D) (4) #8 x 3/8" Phillips screws

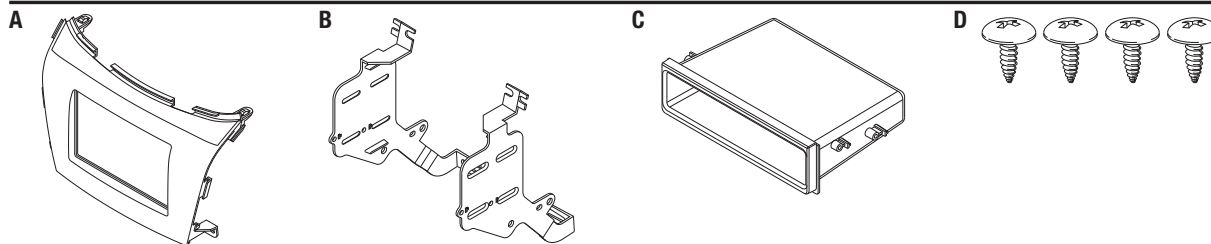

WIRING & ANTENNA CONNECTIONS (sold separately)

Wiring Harness: • 70-7552

Antenna Adapter: • 40-NI12

Table of Contents

Dash Disassembly	2
Kit Assembly	
– ISO DIN radio provision with pocket.....	3


TOOLS REQUIRED

- Panel removal tool
- Phillips screwdriver


CAUTION: Metra recommends disconnecting the negative battery terminal before beginning any installation, unless the vehicle manufacturer recommends against so. Please check with your local Dealership for more information. All accessories, switches, climate controls panels, and especially air bag indicator lights must be connected before reconnecting the battery or cycling the ignition. Also, do not remove the factory radio with the key in the on position, or the vehicle running. It would be best to remove the key from the ignition and then wait a few seconds before removing the factory radio.

Dash Disassembly


1. Slide down the shifter beauty ring under the shift knob. (Figure A)
2. Remove the clip from the shift knob and remove the knob. (Figure A)
3. Starting from the rear, lift and unclip the console shifter trim panel. (Figure B)
4. Remove the lower climate control trim panel and remove. (Figure C)
5. Unscrew (2) Phillips screws securing the radio/climate control trim. (Figure D)
6. Remove the radio/climate trim. (Figure E)

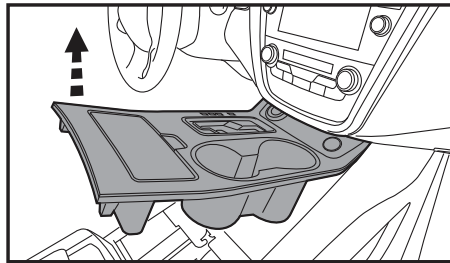


(Figure B)

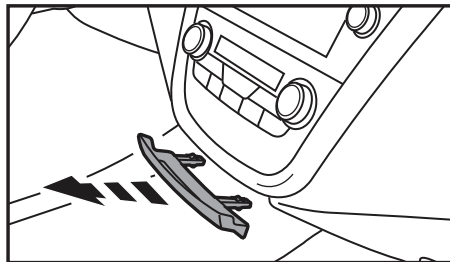

(Figure C)

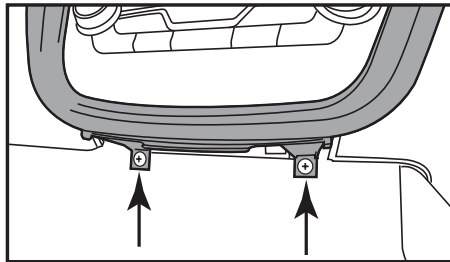


(Figure D)

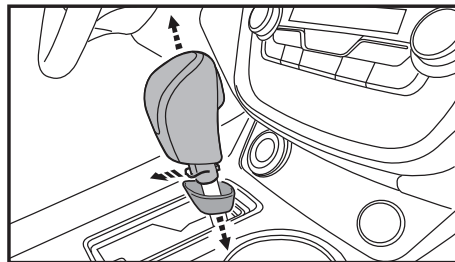


(Figure A)

7. Remove (2) Phillips screws securing the climate control assembly below the radio and then remove. (Figure F)
8. Remove (2) Phillips screws securing the vent/hazard trim panel above the radio and then remove. (Figure F)
9. Remove (4) Phillips screws (2 above and 2 below) from the radio assembly, then unplug and remove the radio. (Figure G)
10. Remove the climate control module from the radio bracket assembly and set aside for kit assembly.


Continue to kit assembly

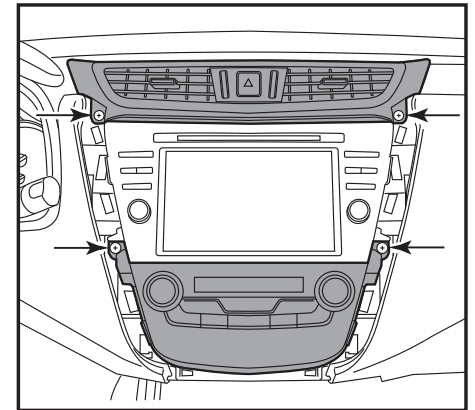

(Figure F)

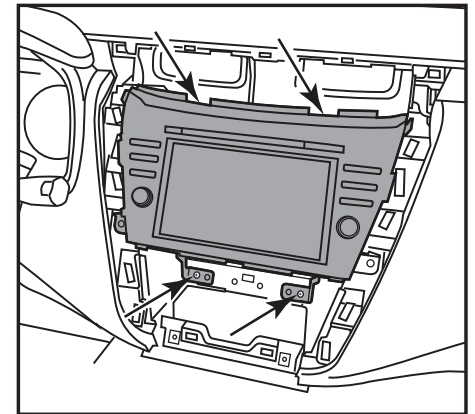

(Figure G)

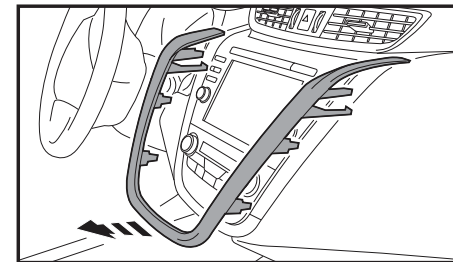

(Figure E)




99-7628BHG


Kit Assembly

ISO DIN radio provision with pocket

1. Remove the metal “DIN” sleeve and trim ring from the aftermarket radio.
2. Attach the *radio brackets* to the radio using the screws supplied with the radio. (Figure A)
3. Attach the *pocket* to the radio bracket assembly using (4) #8 x 3/8” screws supplied. (Figure B)
4. Attach the climate control module below the completed assembly using the factory hardware. (Figure C)

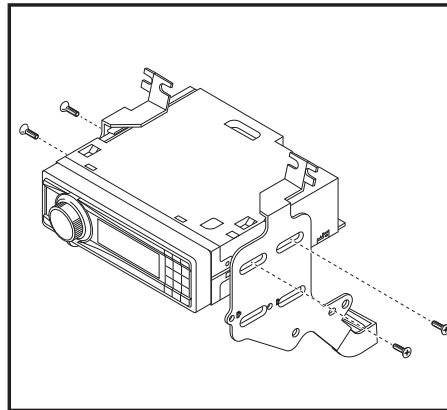


(Figure A)

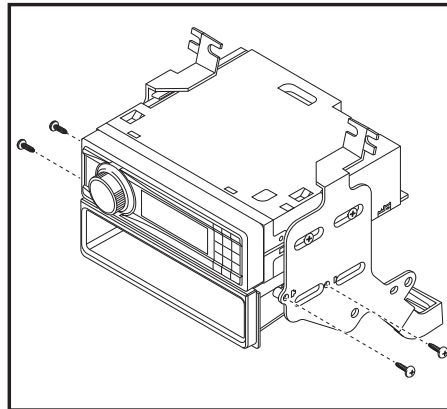

(Figure B)

5. Locate the factory wiring harness and antenna connector in the dash, and complete all necessary connections to the radio and climate controls. Metra recommends using the proper mating adapter from Metra and/or AXCESS. Re-connect the negative battery terminal and test the radio for proper operation.
6. Reassemble the dash in reverse order of disassembly, using the 99-7628BHG radio housing trim panel.

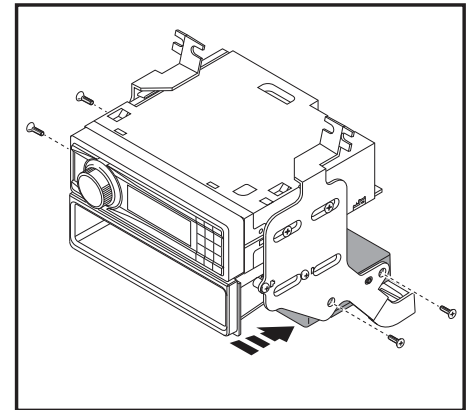

(Figure C)



Installation instructions for part 99-7628BHG



IMPORTANT

If you are having difficulties with the installation of this product, please call our Tech Support line at 1-800-253-TECH. Before doing so, look over the instructions a second time, and make sure the installation was performed exactly as the instructions are stated. Please have the vehicle apart and ready to perform troubleshooting steps before calling.



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.



**Metra recommends MECP
certified technicians**

REV. 9/16/2015 INST99-7628BHG