



## Installation instructions for part INST-7800

# Acura/Honda 1990-2002 INST-7800

### INSTALLATION INSTRUCTIONS

- |           |           |           |           |
|-----------|-----------|-----------|-----------|
| • 99-7888 | • 99-7889 | • 99-7890 | • 99-7891 |
| • 99-7892 | • 99-7893 | • 99-7894 | • 99-7895 |

### TOOLS REQUIRED

Refer to each section title page.

### APPLICATION OVERVIEW

| 99-7888        |           | 99-7890/99-7892 |           | 99-7891                |           |
|----------------|-----------|-----------------|-----------|------------------------|-----------|
| Acura Integra  | 1990-2001 | Acura CL        | 1997-1999 | Honda Civic            | 1996-1998 |
| Acura Legend   | 1990-1996 | Acura Integra   | 1990-2001 | <b>99-7893</b>         |           |
| Acura TL       | 1996-1998 | Acura Legend    | 1990-1996 |                        |           |
| Acura Vigor    | 1992-1994 | Acura TL        | 1996-1998 |                        |           |
| Honda Accord   | 1990-1993 | Acura Vigor     | 1992-1994 | Honda CR-V             | 1997-2001 |
| Honda Odyssey  | 1995-1998 | Honda Accord    | 1990-1997 | Honda Prelude          | 1997-2001 |
| Isuzu Oasis    | 1996-1999 | Honda Odyssey   | 1995-1998 | <b>99-7894/99-7895</b> |           |
| <b>99-7889</b> |           | Isuzu Oasis     | 1996-1999 |                        |           |
| Honda Prelude  | 1992-1996 |                 |           |                        |           |

### APPLICATIONS

See application list inside cover

## Contents

| Installation Instructions | Section |
|---------------------------|---------|
| - 99-7888.....            | 1.0     |
| - 99-7889.....            | 2.0     |
| - 99-7890.....            | 3.0     |
| - 99-7891.....            | 4.0     |
| - 99-7892.....            | 5.0     |
| - 99-7893.....            | 6.0     |
| - 99-7894.....            | 7.0     |
| - 99-7895.....            | 8.0     |

INST-7800 is a collection of installation instruction booklets. Use the Application Overview when selecting which installation instruction selection to use. Each section is setup as a chapter with its own table of contents.

**CAUTION!** All accessories, switches, climate controls panels, and especially air bag indicator lights must be connected before cycling the ignition. Also, do not remove the factory radio with the key in the on position, or while the vehicle is running.

REV. 10/12/2016 INST-7800



99-7888

## Section 1

Acura/Honda/Isuzu  
1990-2001


99-7888

### KIT FEATURES

- 2-shaft radio provision
- DIN radio provision
- Equalizer provision
- Rear support provision

### KIT COMPONENTS


- A) Radio housing
- B) Trimplate
- C) Radio support
- D) Mounting bracket
- E) Equalizer dummy plate
- F) Shaft masks
- G) (2) Pal nuts

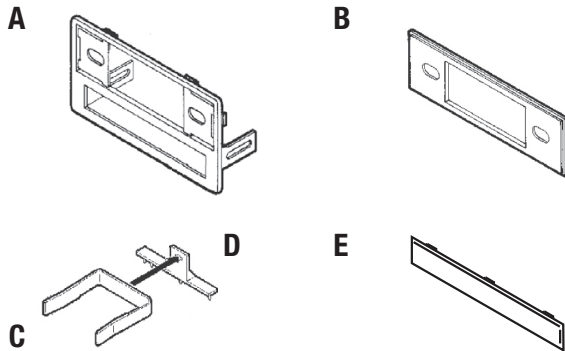

F



G



### TOOLS REQUIRED

- Phillips screwdriver
- Cutting tool
- Socket wrench

## Table of Contents

### Dash Disassembly

|                                |     |
|--------------------------------|-----|
| – Acura Integra 1990-1993..... | 1.0 |
| – Acura Integra 1994-2001..... | 1.1 |
| – Acura Legend 1990.....       | 1.1 |
| – Acura Legend 1991-1996.....  | 1.1 |
| – Acura TL 1996-1998.....      | 1.2 |
| – Acura Vigor 1992-1994.....   | 1.2 |
| – Honda Accord 1990-1993.....  | 1.3 |
| – Honda Odyssey 1995-1998..... | 1.3 |
| – Isuzu Oasis 1996-1999.....   | 1.3 |

### Kit Assembly


|                                |     |
|--------------------------------|-----|
| – 2-shaft radio provision..... | 1.4 |
| – DIN radio provision.....     | 1.5 |

## Dash Disassembly


### Acura Integra 1990-1993

1. Remove (3) screws from each side of the center console and remove the console.
2. Remove (2) screws securing the factory radio to the sub-dash support bracket.
3. Slide the radio/pocket assembly out and disconnect the wiring. (Figure A)
4. Locate the radio housing. (Figure B)

*Continue to kit assembly for  
ALL VEHICLES, Section 1*

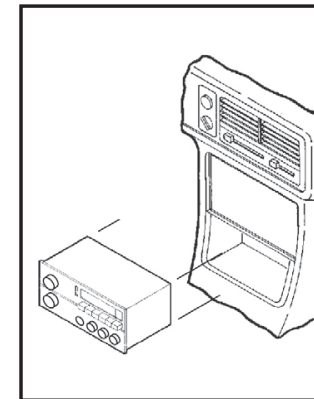

(Figure A)

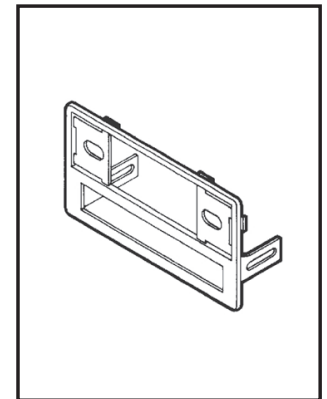

(Figure B)




99-7888

## Dash Disassembly

### Acura Integra 1994-2001


1. Remove the cover cap located under the emergency brake and remove (2) screws exposed.
2. Remove (2) screws from the rear corners of the lower dash trim bezel and remove. (Figure A)
3. Remove the ashtray and (2) screws exposed. (Figure A)
4. Unsnap the ashtray housing and disconnect the cigarette lighter harness.

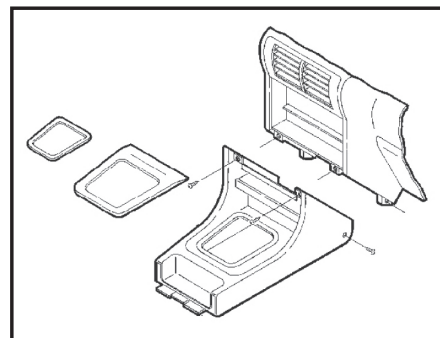

(Figure A)

5. Remove the gear shifter knob and unsnap the shifter trim.
6. Remove (2) screws below the radio opening and remove the upper dash trim bezel.
7. Remove (2) 8mm screws securing the factory radio and disconnect the wiring.
8. Locate the radio housing. (Figure B)

*Continue to kit assembly for ALL VEHICLES, Section 1*




(Figure B)

### Acura Legend 1990


1. Remove (2) screws below the ashtray. (Figure A)
2. Unclip the dash trim bezel then disconnect the cigarette lighter wiring and remove the bezel.
3. Remove (2) bolts securing the rear of the factory radio and disconnect the wiring.
4. Modify the factory radio housing by cutting and

removing the shaded portions of the housing lip. (Figure B)

*Continue to kit assembly for ALL VEHICLES, Section 1*



(Figure A)

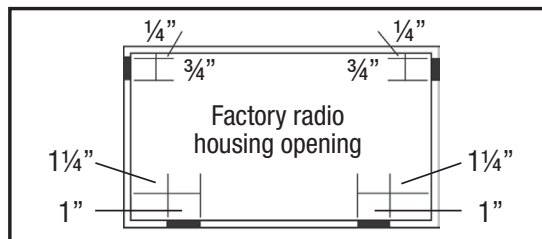


(Figure B)


### Acura Legend 1991-1996

1. Remove (2) screws below the ashtray. (Figure A)
2. Unclip the dash trim bezel and disconnect the cigarette lighter wiring and remove the bezel.
3. Remove (2) bolts securing the rear of the factory radio and disconnect the wiring.
4. Locate the radio housing. (Figure B)

*Continue to kit assembly for ALL VEHICLES, Section 1*



(Figure A)



(Figure B)

## Dash Disassembly

### Acura TL 1996-1998


1. Using a small screwdriver, unclip the perimeter of the radio trim bezel.
2. Disconnect the climate control and rear defroster wiring and remove the bezel.
3. Remove (4) Phillips screws securing the factory radio/trim bezel assembly. (Figure A)
4. Loosen (2) Phillips screws securing the back of the radio to

the metal housing and slide the radio out.


*Note, it is NOT necessary to remove the screws securing the metal housing to the bezel.*

5. Disconnect the wiring.
6. Cut and remove the top clips from the radio housing. (Figure B)

*Continue to kit assembly for ALL VEHICLES, Section 1*

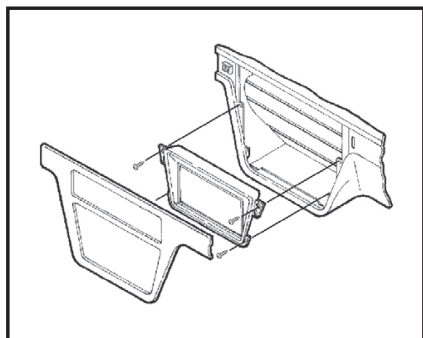

(Figure A)

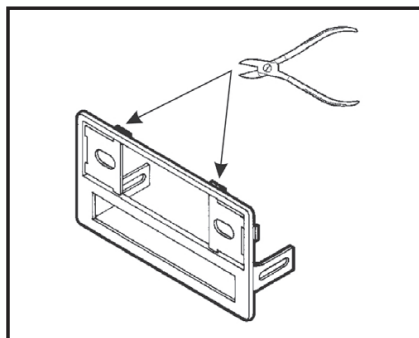


(Figure B)

### Acura Vigor 1992-1994


1. Remove the access cap from the climate control cluster and (1) screw exposed. (Figure A)
2. Unclip the cluster and remove (2) screws exposed.
3. Remove the ashtray and (2) Phillips screws exposed. (Figure A)
4. Remove the cover caps from each front corner of the center console and the screws exposed.
5. Open the storage compartment, lift up the carpet and remove (2) screws exposed.

6. Lift up on the center console and remove.
7. Unclip the radio trim bezel and disconnect the wiring.
8. Remove (2) bolts from the back of the factory radio and disconnect the wiring.
9. Modify the factory radio housing by cutting and removing the shaded portions of the housing lip. (Figure B)

*Continue to kit assembly for ALL VEHICLES, Section 1*

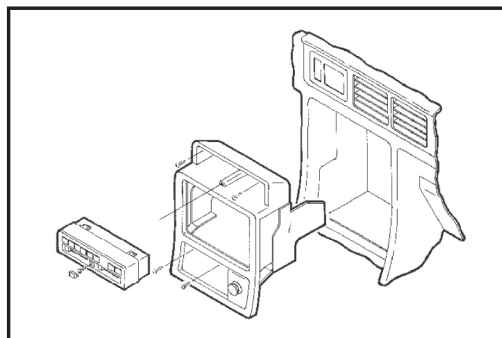

(Figure A)

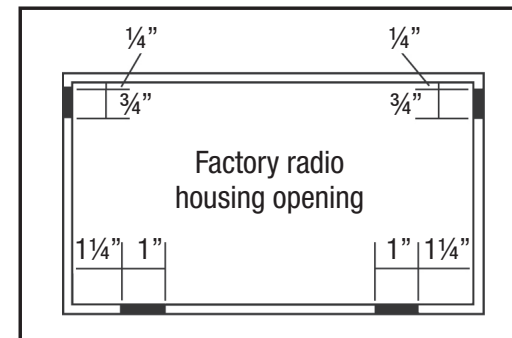


(Figure B)

## Dash Disassembly


### Honda Accord 1990-1993

1. Remove (4) screws from the lower portion of the center console. (Figure A)
2. Remove the gear shifter knob and lift the console out.
3. Remove the ashtray and ashtray bracket.
4. Remove (2) screws from the bottom of the radio support, slide the unit out and disconnect the wiring.
5. Locate the radio housing. (Figure B)

*Continue to kit assembly for ALL VEHICLES, Section 1*

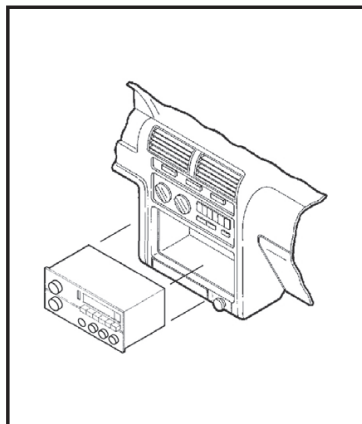

(Figure A)

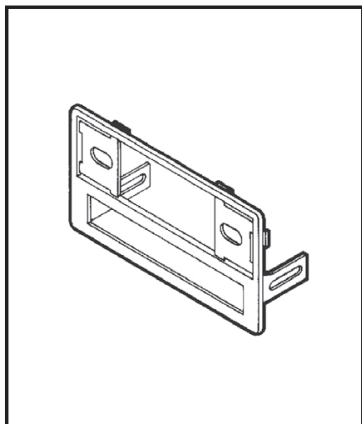


(Figure B)

### Honda Odyssey 1995-1998

### Isuzu Oasis 1996-1999


1. Remove (2) 8mm screws under the glove box.
2. Remove (1) Phillips screw on the glove box arm and remove the box.
3. Remove (2) Phillips screws exposed in the glove box cavity then remove (2) Phillips screws below the storage box door (under the ashtray). (Figure A)
4. Remove (2) screws from the left side of the dash console.

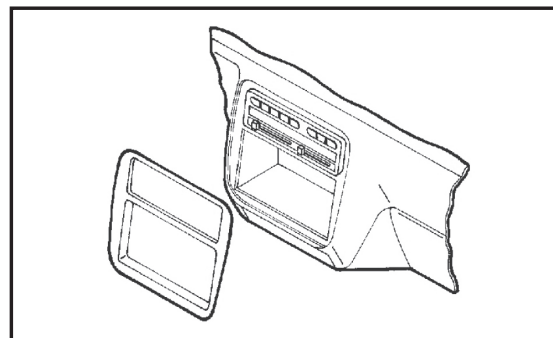

(Figure A)

5. Remove (1) Phillips screw from the coin tray and then remove (1) Phillips screw under the ignition.
6. Remove (4) Phillips screws securing the factory cupholder.
7. Remove (2) 8mm hex-head screws from the rear support bracket and disconnect the wiring.
8. Locate the radio housing. (Figure B)

*Continue to kit assembly for ALL VEHICLES, Section 1*

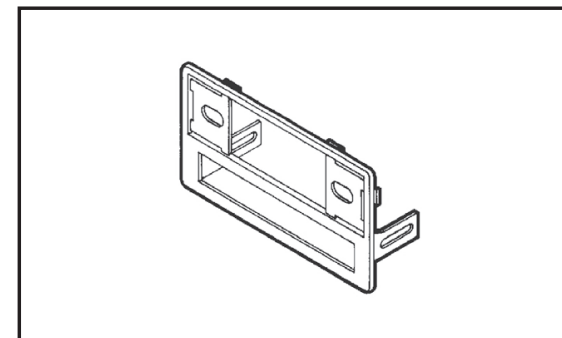

(Figure B)



99-7888

## Kit Assembly

### All Vehicles

#### 2-shaft radio provision:

1. Attach the trim plate and shaft masks to the radio housing. (Figure A1)
2. Slide the radio into the kit and secure with shaft nuts. (Figure A1)

*Continue to Step 5*

#### DIN radio provision:

1. Cut and remove the shaft supports from the radio housing.
2. Remove the metal DIN sleeve from the aftermarket radio.
3. Slide the sleeve into the kit and secure by bending the metal locking tabs down.
4. Slide the radio into the sleeve until it clicks in. (Figure A2)

*Continue to Step 5*

#### 5. If an equalizer will be included:

Slide the aftermarket equalizer into the back of the radio housing. Using the hardware included with the equalizer, secure the unit to the kit. (Figure B)

#### If an equalizer will NOT be included:


Snap the Equalizer Dummy Plate into the radio housing. (Figure C)

#### 6. Insert the Radio Support into the Mounting Bracket. (Figure D)


#### 7. Turn the Radio Support to lock into place. (Figure E)

#### 8. Secure the assembly to the factory mounting plate in the sub-dash with (2) Pal Nuts supplied. (Figure F)


*Continue on the next page*

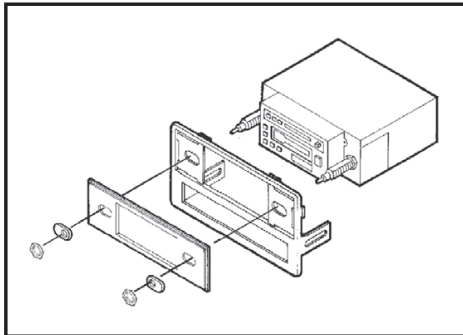


(Figure A1)

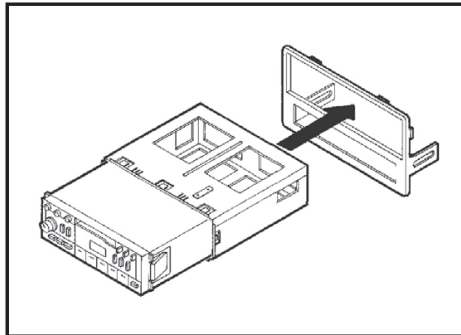

(Figure A2)

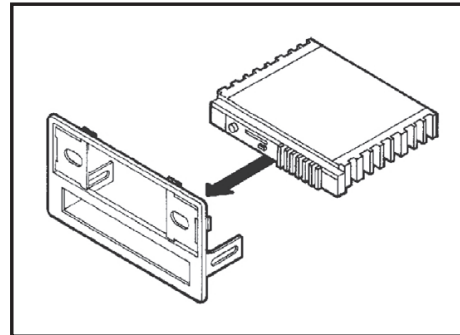

(Figure B)

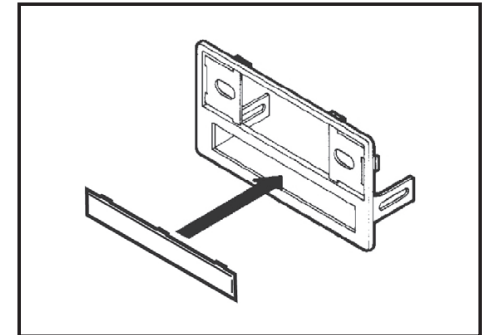


(Figure C)




99-7888

## Kit Assembly



(Figure D)



(Figure E)

8. Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter from Metra. Test the radio for proper operation.


9. **Integra, Accord, Odyssey, Oasis:**

Snap the completed assembly into the sub-dash. (Figure G)


**Legend, TL, Vigor:**

Snap the completed assembly into the factory trim bezel. Secure the bezel to the dash with those screws previously removed. (Figure H)


10. Reassemble the dash in reverse order of disassembly.

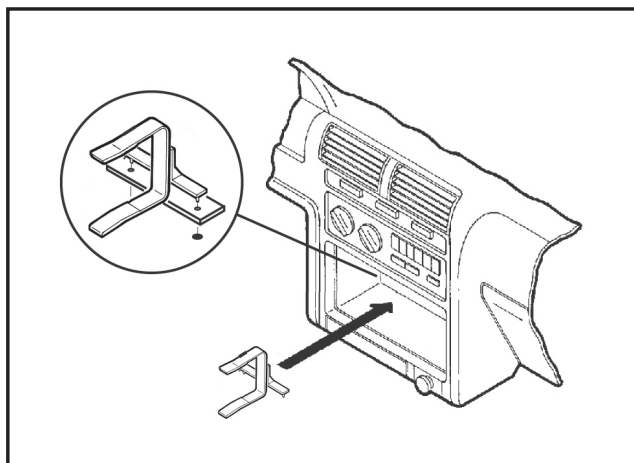

(Figure F)

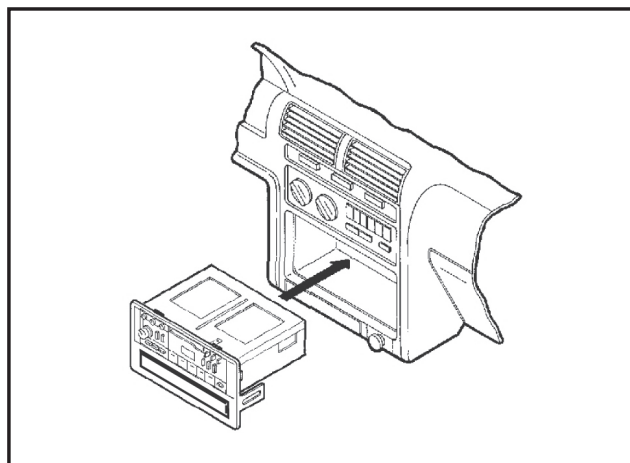

(Figure G)

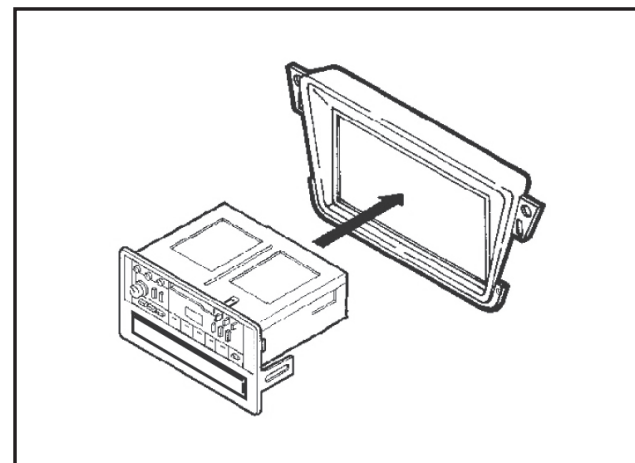

(Figure H)



## Installation instructions for part INST-7800



### IMPORTANT

If you are having difficulties with the installation of this product, please call our Tech Support line at **1-800-253-TECH**. Before doing so, look over the instructions a second time, and make sure the installation was performed exactly as the instructions are stated. Please have the vehicle apart and ready to perform troubleshooting steps before calling.



#### KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto [www.installerinstitute.com](http://www.installerinstitute.com) or call 800-354-6782 for more information and take steps toward a better tomorrow.



**Metra recommends MECP  
certified technicians**