



Installation instructions for 99-8160G


Lexus LS430 2001-2006 (without factory NAV) 99-8160G

KIT FEATURES

- ISO DIN radio provision with pocket
- *Painted gray to match factory color and finish*

KIT COMPONENTS

- A) Radio housing • B) Brackets • C) Pocket • D) Panel clip brackets (2) • E) Panel clip bracket screws (4) #4 x 3/8" • F) Panel clips (2) • G) (4) #8 x 3/8" truss-head Phillips screws • H) (4) #8 x 3/8" pan-head Phillips screws

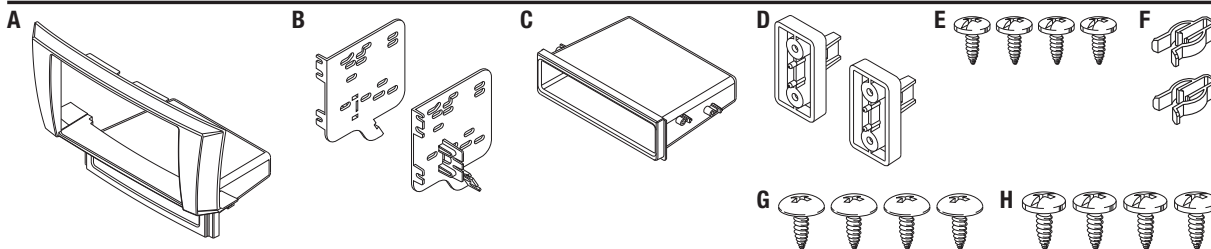

WIRING & ANTENNA CONNECTIONS (sold separately)

Wiring Harness: • TYTO-01 Axxess Interface

Antenna Adapter: • 40-LX10 antenna adapter and 44-EC204 antenna extension



Table of Contents

Dash Disassembly

- Lexus LS430 2001-2006 2

Kit Assembly

- ISO DIN radio provision with pocket..... 3

TOOLS REQUIRED

- Panel removal tool • Phillips screwdriver
- Socket wrench

CAUTION: Metra recommends disconnecting the negative battery terminal before beginning any installation. All accessories, switches, and especially air bag indicator lights must be plugged in before reconnecting the battery or cycling the ignition.

NOTE: Refer to the instructions included with the aftermarket radio.




99-8160G


Dash Disassembly

1. Remove the heated seat switch panel. (Figure A)
2. Remove the three screws below the tray assembly. Unclip and remove tray assembly. (Figure B)
3. Remove two 10mm bolts securing the factory radio. (Figure C)


Continue to kit assembly

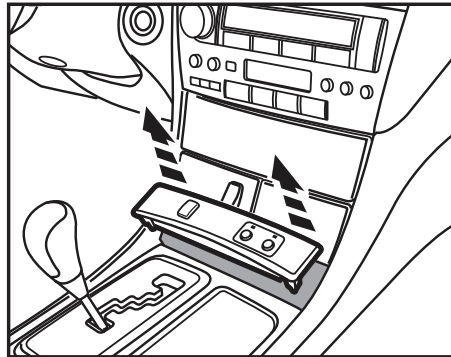

(Figure A)

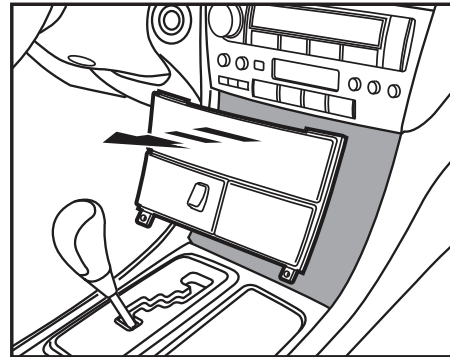

(Figure B)

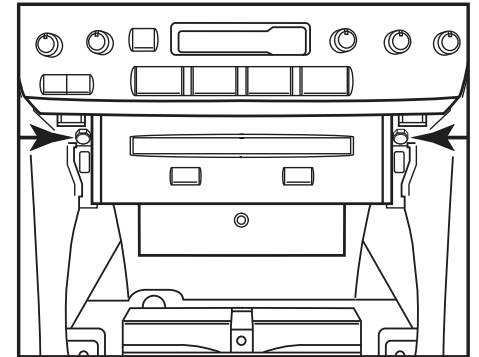

(Figure C)




99-8160G


Kit Assembly

ISO DIN radio provision

1. Mount the pocket to the radio brackets with the (4) #8 x 3/8" Phillips screws supplied. (Figure A)
2. Mount the bracket/pocket assembly to the radio housing with the included (4) #8 x 3/8" screws. (Figure B)
3. Mount the two panel clip brackets to the brackets using the supplied (4) #4 x 3/8" screws. (Figure C)
4. Attach the (2) white plastic panel clips to the panel clip brackets. (Figure C)

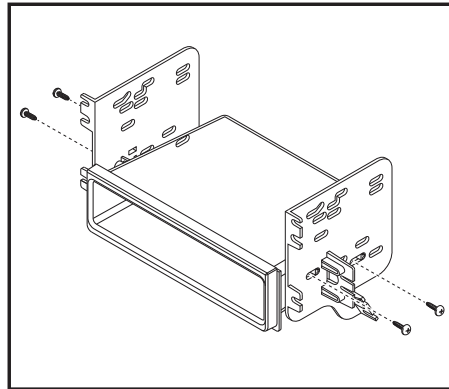

(Figure A)

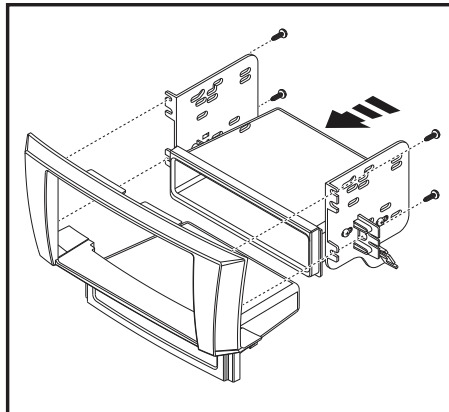


(Figure B)


5. Slide the radio into radio brackets and secure with screws supplied with the radio. (Figure D)
6. Locate the factory wiring harness and antenna plug in the dash. Metra recommends using the proper mating adapters from Metra and/or AXXESS.

Note: The factory antenna connection is located at the tuner brain on the passenger side rear of the trunk and will need to be routed through the vehicle to connect with the aftermarket radio.

7. Mount the new radio assembly into the dash and reassemble dash in reverse order of disassembly.

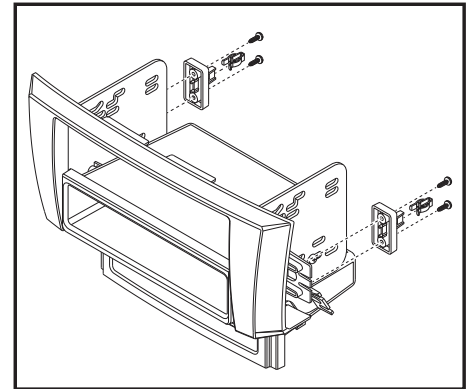

(Figure C)

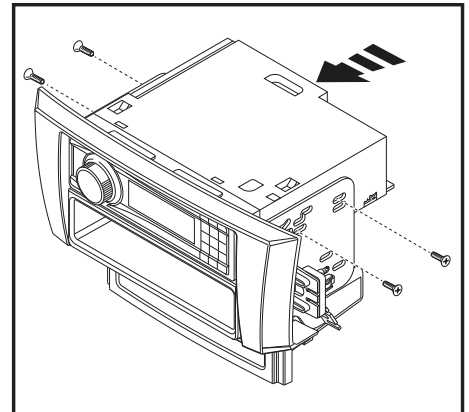

(Figure D)



Installation instructions for 99-8160G



REV. 12/17/2014 INST99-8160G



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.



**Metra recommends MECP
certified technicians**

METRA. The World's best kits.™

1-800-221-0932

metraonline.com

© COPYRIGHT 2013 METRA ELECTRONICS CORPORATION