



Installation instructions for part 99-8248B

Toyota Highlander 2014-up 99-8248B


KIT FEATURES

- ISO DIN radio provision with pocket
- **Painted black**



KIT COMPONENTS

- A) Radio housing trim panel • B) Brackets • C) Pocket • D) (4) #8 x 3/8" screws • E) (2) Panel clips

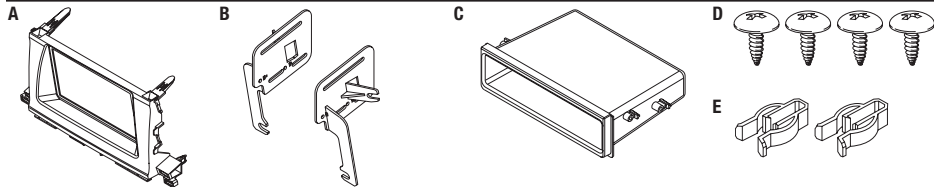

WIRING & ANTENNA CONNECTIONS (sold separately)

Wiring Harness: • 70-1761 or TYT0-02

Antenna Adapter: • Not required

TOOLS REQUIRED

- Panel removal tool • Phillips screwdriver

Table of Contents

Dash Disassembly

- Toyota Highlander 2014-up 2

Kit Assembly

- ISO DIN radio provision with pocket..... 3


CAUTION: Metra recommends disconnecting the negative battery terminal before beginning any installation. All accessories, switches, and especially air bag indicator lights must be plugged in before reconnecting the battery or cycling the ignition.

NOTE: Refer to the instructions included with the aftermarket radio.


Dash Disassembly

1. Unsnap and remove climate control and the long trim panel with it. (Figure A)
2. Unsnap the thin trim panel from the top and right side of the radio. (Figure B)
3. Unsnap and remove the climate vents from either side of the radio. (Figure C)
4. Remove four 10 mm bolts to remove the factory radio. (Figure D)


Continue to Kit Assembly

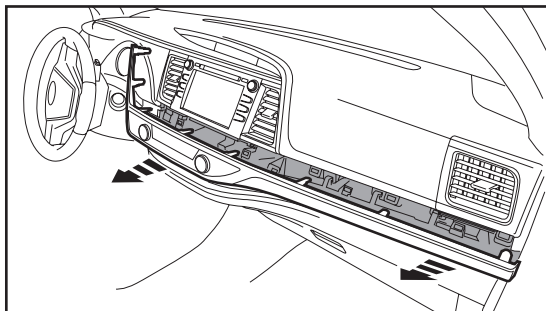


(Figure A)

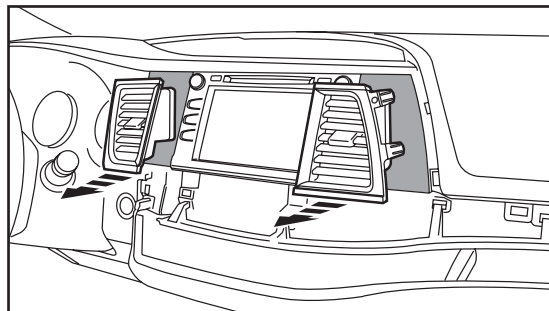

(Figure C)

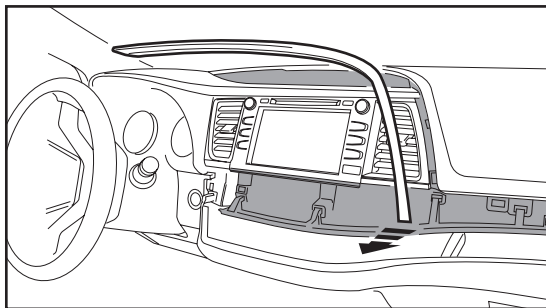

(Figure B)

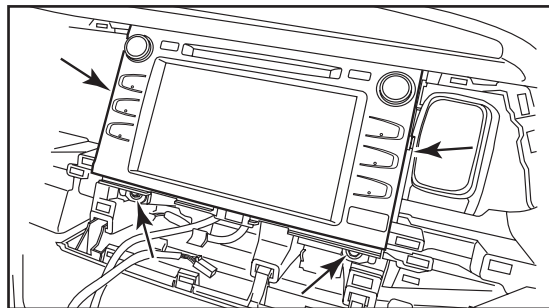


(Figure D)

Kit Assembly


ISO DIN radio provision with pocket

1. Attach the (2) panel clips to the radio housing.
Note: The factory panel clips may be used if preferred.
2. Mount the pocket to the bracket/panel assembly with the (4) #8 x 3/8" Phillips screws supplied. (Figure A)
3. Slide the radio into the assembly and secure with screws supplied with the radio. (Figure B)
4. Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter from Metra or AXCESS. All accessories, switches, and especially air bag indicator lights must be plugged in before reconnecting the battery or cycling the ignition. Test everything for proper operation.

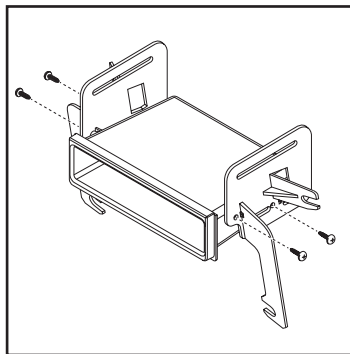

(Figure A)

5. Mount the radio/bracket assembly into the dash opening.
6. Snap the radio trim panel over the new radio and reassemble dash in reverse order of disassembly.

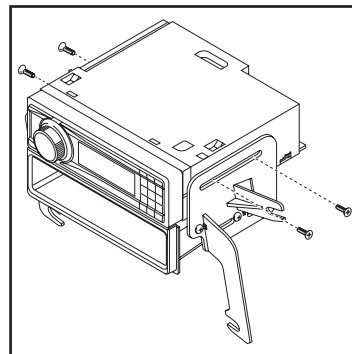

(Figure B)



Installation instructions for part 99-8248B



REV 12/9/2014 INST99-8248B



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.



**Metra recommends MECP
certified technicians**

METRA. The World's best kits.™

1-800-221-0932

metraonline.com

© COPYRIGHT 2004-2014 METRA ELECTRONICS CORPORATION