



Nissan Maxima* 2000-2003

* With Bose and/or Convenience Package

Visit MetraOnline.com for more detailed information about the product and up-to-date vehicle specific applications


KIT FEATURES

- DIN radio provision with pocket

KIT COMPONENTS

- A) Radio housing • B) (2) #8 x 1/2" Phillips screws

A



B




TABLE OF CONTENTS

Dash Disassembly	2
Kit Assembly	3

WIRING & ANTENNA CONNECTIONS (sold separately)

Wiring Harness: 70-7550

Antenna Adapter: 40-N111

TOOLS REQUIRED


- Panel removal tool • Phillips screwdriver

Attention! Let the vehicle sit with the key out of the ignition for a few minutes before removing the factory radio. When testing the aftermarket equipment, ensure that all factory equipment is connected before cycling the key to ignition.


DASH DISASSEMBLY

1. Unclip and remove the climate control vent panel. (Figure A)
2. Remove (2) Phillips screws exposed behind the vents. (Figure A)
3. Remove the ashtray and (1) Phillips screw exposed in the ashtray cavity. (Figure B)
4. Unclip and remove the gear shift trim panel. (Figure B)
5. Remove (2) Phillips screws exposed behind gear shift trim panel. (Figure B)
6. Unclip and remove the radio/climate control assembly.
7. Remove (8) Phillips screws securing the factory radio to the bracket assembly.
8. Using a hammer, flatten the protruding screw holes ("A") on the factory brackets. (Figure C)


Continue to Kit Assembly

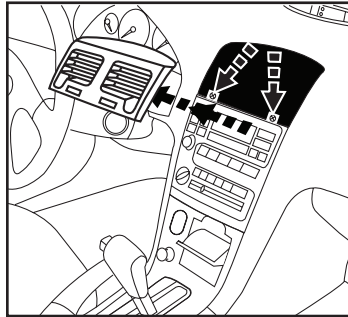

(Figure A)

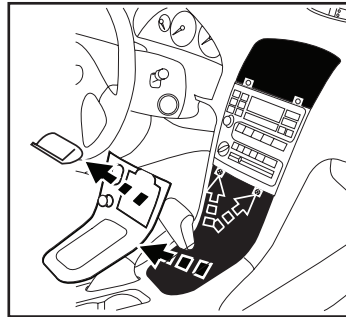


(Figure B)

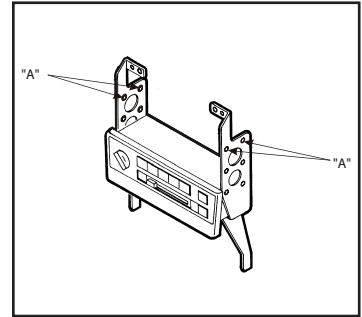


(Figure C)

KIT ASSEMBLY

1. Secure the **radio housing** to the factory brackets using (2) #8 x 1/2" Phillips screws supplied. (Figure A)
2. Remove the metal DIN sleeve from the aftermarket radio.
3. Slide the sleeve into the **radio housing** and secure by bending the metal locking tabs down. (Figure A)
4. Slide the radio back into the sleeve until it clicks in. (Figure A)
5. Locate the factory wiring harness and antenna connector in the dash, and complete all necessary connections to the radio and climate controls. Metra recommends using the proper mating adapter from Metra and/or AXXESS. Test the radio for proper operation
6. Secure the completed assembly into the dash using the factory screws, then reassemble the dash in reverse order of disassembly to complete the installation. (Figure B)

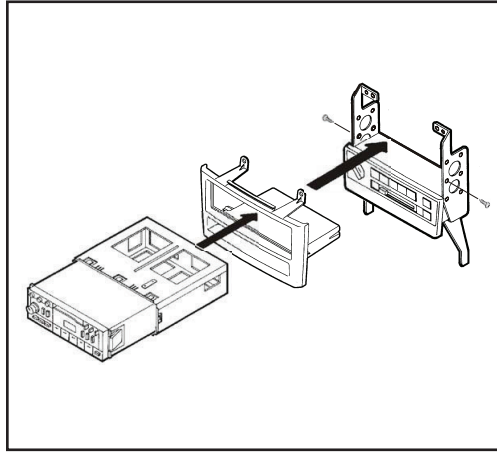

(Figure A)

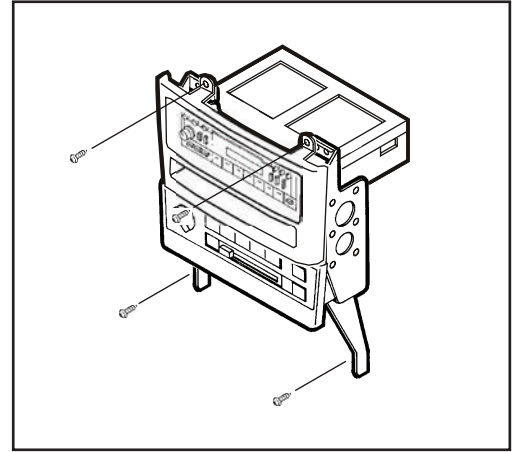

(Figure B)



99-7416
INSTALLATION INSTRUCTIONS



If you are having difficulties with the installation of this product, contact our Tech Support line either by phone at **1-800-253-TECH**, or email at **techsupport@metra-autosound.com**. Before doing so, look over the instruction booklet a second time and ensure that the installation was performed exactly as the instruction booklet is stated. Have the vehicle apart and ready to perform troubleshooting steps before contacting Metra/Axxess Tech Support.



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.



**Metra recommends MECP
certified technicians**