



Fits Nissan **Sentra** (without pocket door)

2007-2012

Visit MetraOnline.com for more detailed information about the product and up-to-date vehicle specific applications

KIT FEATURES

- Stereo installation kit designed to fit any standard 2" or 4" tall after market radio utilizing our patented quick-release, snap-in ISO mount system with custom trim ring
- Contoured and textured to match the factory dash
- **The display above the radio will no longer function**

KIT COMPONENTS

- A) Radio housing • B) Radio housing trim plate • C) Double DIN trim plate • D) Radio housing brackets • E) Carriage bolts (2) • F) Nuts (2)







TABLE OF CONTENTS

Dash Disassembly	2-3
Kit Preparation.....	4
Kit Assembly	
- Din radio provision with pocket	5
- Double Din radio provision	6

WIRING & ANTENNA CONNECTIONS (sold separately)

Wiring Harness: Visit Metraonline.com for wiring harness options

Antenna Adapter: 40-N12


TOOLS REQUIRED

- Small flat blade screwdriver
- Panel removal tool • Phillips screwdriver
- Hook tool • Socket set


Attention! With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections are secure before cycling the ignition to test this product.

DASH DISASSEMBLY

1. Push down on the collar below the shift knob to unclip. Using a small screwdriver or hook tool remove the spring clip to release and remove the shift knob. (Figure A)
2. Unclip and remove shifter trim panel around shifter. (Figure B)




(Figure A)




(Figure B)

3. Unclip and remove the A/C control panel. (Figure C)
4. Remove (2) Phillips screws securing the bottom of the radio trim panel. (Figure D)

Continued on next page

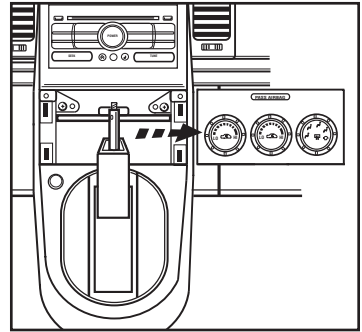

(Figure C)

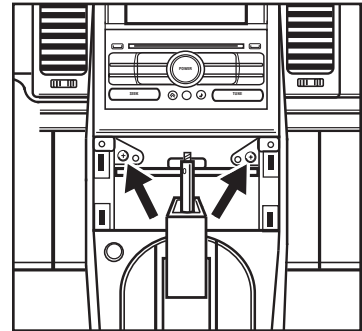


(Figure D)

DASH DISASSEMBLY *(Cont.)*


5. Unclip and remove the trim panel at the top of the radio trim panel. (Figure E)
6. Remove (2) Phillips screws securing the top of the radio trim panel. (Figure F)
7. Unplug and remove radio/trim panel assembly. (Figure G)
8. Remove (4) Phillips screws securing the radio brackets to the trim panel and remove the trim panel.
9. Remove (6) Phillips screws, 3 per side, securing the factory brackets to the radio/display assembly.

Note: Retain the factory brackets and display for possible use during kit assembly.


Continue to Kit Assembly

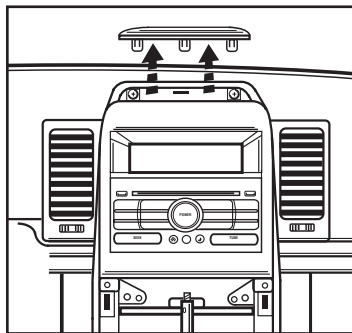

(Figure E)

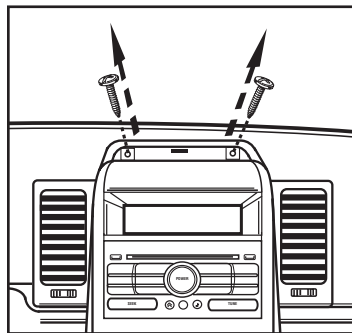

(Figure F)

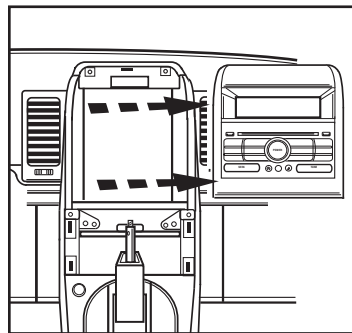


(Figure G)


KIT PREPARATION

1. Attach the (2) **radio housing brackets** to the **radio housing** using the supplied (2) carriage bolts and nuts. (Figure A)
2. Secure the display into the assembled radio housing/bracket assembly using the factory hardware. (Figure B)

Continue to Kit Assembly

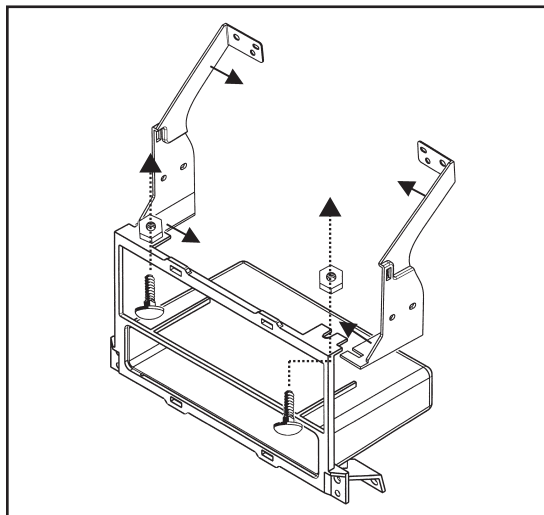

(Figure A)

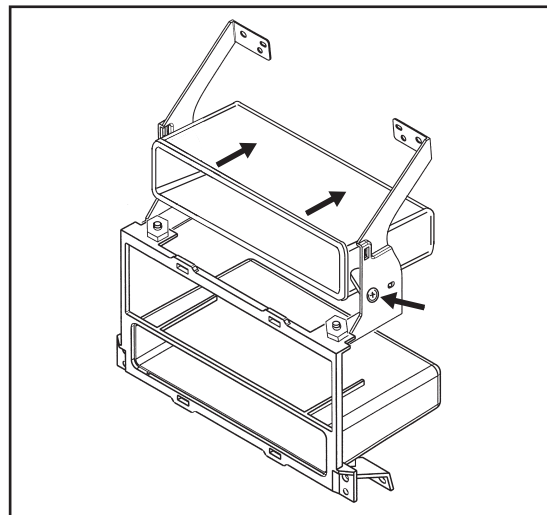


(Figure B)


KIT ASSEMBLY

DIN radio provision with pocket

1. Slide the DIN cage into the **radio housing** and secure by bending the metal locking outward.
2. Slide the aftermarket radio into the cage until it snaps into place.
3. Attach the **radio housing trim plate** supplied with the kit.
4. Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter from Metra or AXXESS. Re-connect the negative battery terminal and test the unit for proper operation.
5. Reassemble dash in reverse order of disassembly.

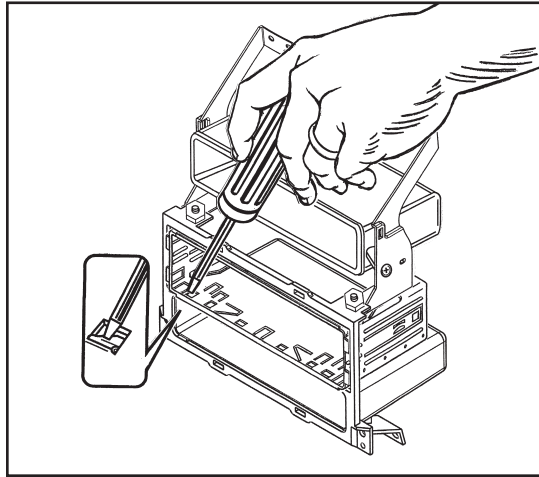

(Figure A)

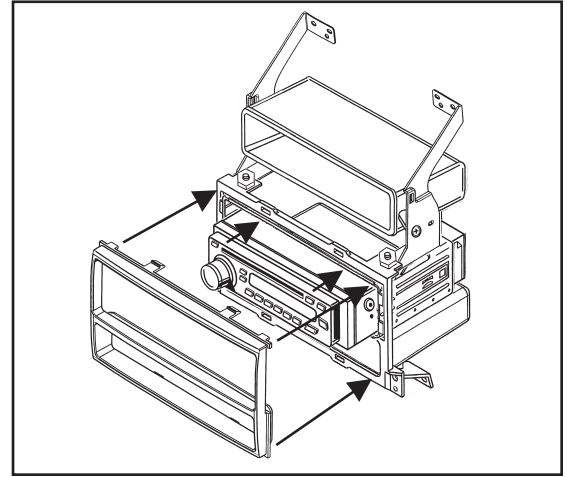


(Figure B)


KIT ASSEMBLY

Double DIN radio provision

1. Re-Secure the display to the factory brackets using the factory hardware. (Figure A)
2. Slide the Double DIN radio into the factory brackets and secure the unit to the brackets using the screws supplied with the radio. (Figure B)
3. Place the **Double DIN trim plate** over the face of the aftermarket radio.
4. Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter from Metra or AXXESS. Re-connect the negative battery terminal and test the unit for proper operation.
5. Reassemble dash in reverse order of disassembly.

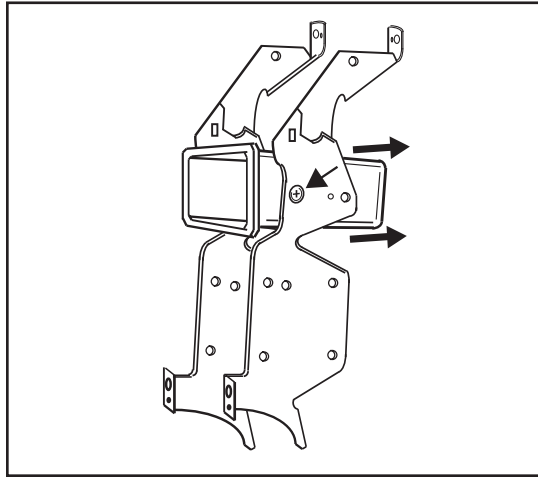

(Figure A)

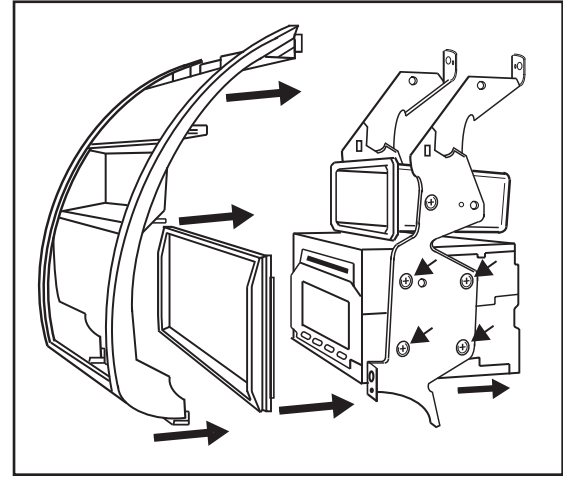

(Figure B)

[illegible][illegible]



99-7422
INSTALLATION INSTRUCTIONS



Having difficulties? We're here to help.



Contact our Tech Support line at:

386-257-1187



Or via email at:

techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 5:00 PM

Sunday: 10:00 AM - 4:00 PM



**Metra recommends MECP
certified technicians**