



INSTALLATION INSTRUCTIONS FOR PART 99-8246HG

APPLICATIONS


Toyota Tundra 2014-up 99-8246HG

KIT FEATURES

- ISO DIN radio provision with pocket
- *Painted high gloss black*

KIT COMPONENTS

- A) Radio housing trim panel • B) Brackets • C) Pocket • D) (8) #8 x 3/8" Phillips screws

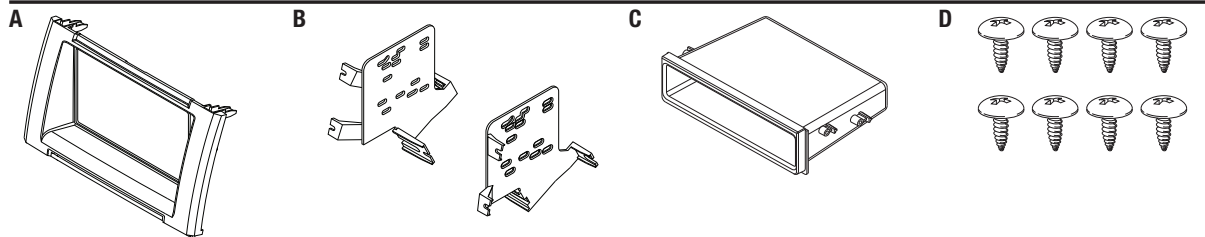

WIRING & ANTENNA CONNECTIONS (sold separately)

Wiring Harness: • 70-1761 - Standard harness or TYTO-01 premium interface

Antenna Adapter: • 40-LX11

TOOLS REQUIRED

- Panel removal tool • Phillips screwdriver • Socket wrench



Table of Contents

Dash Disassembly

- Toyota Tundra 2014-up 2

Kit Assembly

- ISO DIN radio provision with pocket..... 3

CAUTION: Metra recommends disconnecting the negative battery terminal before beginning any installation, unless the vehicle manufacturer recommends against so. Please check with your local Dealership for more information. All accessories, switches, climate controls panels, and especially air bag indicator lights must be connected before reconnecting the battery or cycling the ignition. Also, do not remove the factory radio with the key in the on position, or the vehicle running. It would be best to remove the key from the ignition and then wait a few seconds before removing the factory radio.




99-8246HG

Dash Disassembly

1. Unsnap and remove the factory climate controls. (Figure A)
2. Remove (4) 10 mm bolts securing the factory radio and remove it.

Continue to kit assembly

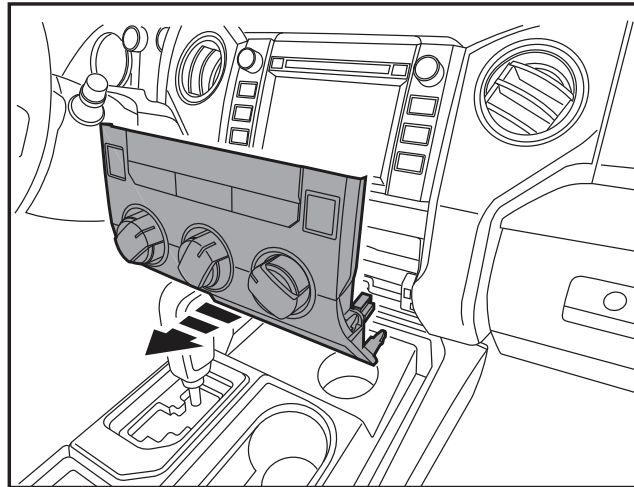

(Figure A)




99-8246HG


Kit Assembly

ISO DIN radio provision with pocket


1. Attach the factory panel clips to the *radio housing trim panel*.
2. Mount the *pocket* to the *radio brackets* with the (4) supplied #8 x 3/8" Phillips screws. (Figure A)
3. Mount the *bracket/pocket* assembly to the *housing trim panel* with the remaining (4) supplied #8 x 3/8" screws. (Figure B)
4. Slide the radio into *radio brackets* and secure with screws supplied with the radio. (Figure C)
5. Locate the factory wiring harness and antenna plug in the dash. Metra recommends using the proper mating adapters from Metra and/or AXXESS.
6. Mount the new radio assembly into the dash and reassemble dash in reverse order of disassembly.

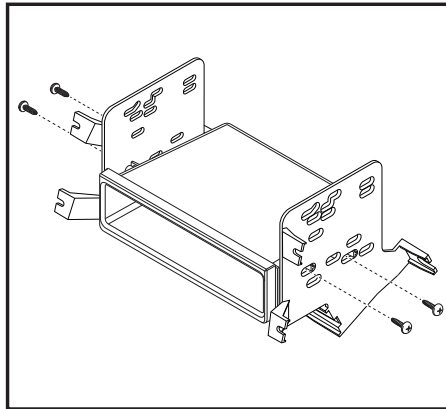

(Figure A)

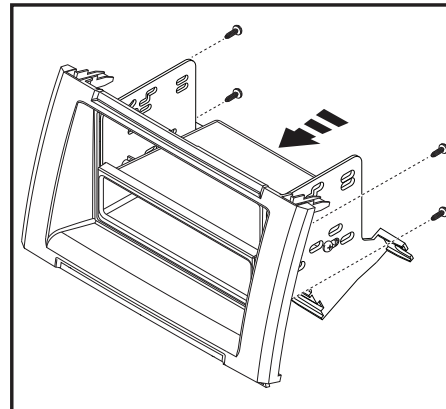

(Figure B)

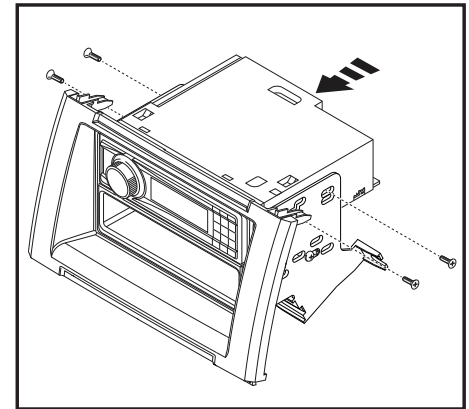

(Figure C)



INSTALLATION INSTRUCTIONS FOR PART 99-8246HG



REV. 11/17/2015 INST99-8246HG

IMPORTANT

If you are having difficulties with the installation of this product, please call our Tech Support line at 1-800-253-TECH. Before doing so, look over the instructions a second time, and make sure the installation was performed exactly as the instructions are stated. Please have the vehicle apart and ready to perform troubleshooting steps before calling.



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.



Metra recommends MECP certified technicians

METRA. The World's best kits.™

1-800-221-0932

metraonline.com

© COPYRIGHT 2014 METRA ELECTRONICS CORPORATION