



**Integration
Performance
Installation Guide**

Universal

IP-UNI62

Dear Customer,

Thank you for choosing Morel for your car audio speaker solution. Morel prides itself on engineering and producing the best high-fidelity speaker systems. We hope you enjoy your Integration Performance sound system for years to come. If you have any questions, please contact your Morel dealer or Morel support at: www.morelhifi.com

Components and Mounting

Woofer



X2



X2



X8



X8

Tweeter



X2



X2



X2



X2



X4




X2




X2

Woofer mounting

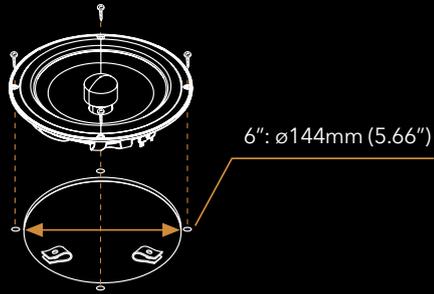


Tweeter

Flush Mount

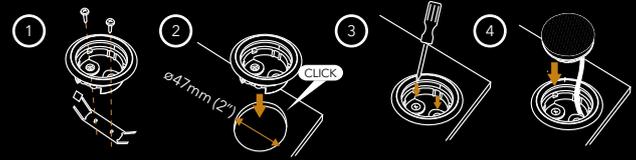


Surface Mount

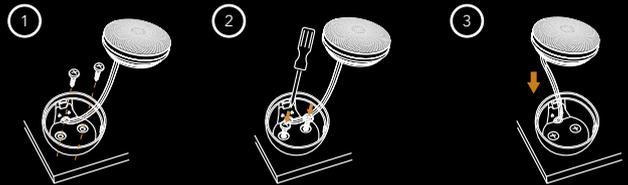


Connections

4-Ch Amplifier

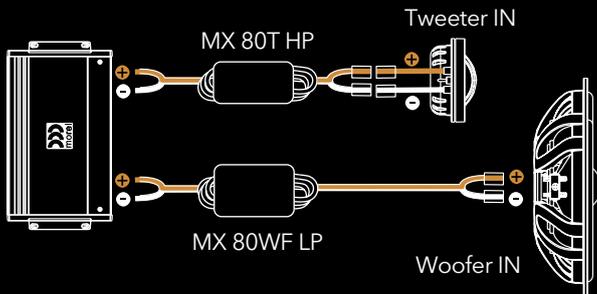

2-Ch Amplifier

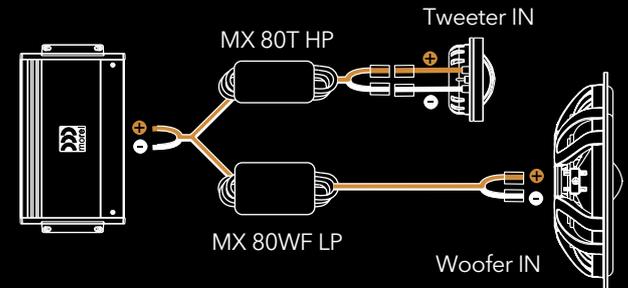

Specifications

WOOFER	IP-UNI6MW
Nominal Impedance (ohm)	4
Power Handling Wrms	80
Max. Trans. Pwr Handling Wrms	150
Sensitivity (2.83 V/1M) dB	88
Frequency response Hz	45-5,500
Resonant Freq. Fs Hz	65
Voice Coil Diameter mm (inch)	25 (1)
DC Resistance (ohm)	3.1
Magnet System	Neodymium double magnet
HE-Magnetic Gap Height mm (inch)	4 (0.16)
BL Product/BXL	4.3
Electrical Q Factor QES	0.83
QTS	0.65
QMS	3.2
Moving Mass MMS - gr/ounce	11.1(0.39)
Equiv. Can Air Load VAS - L (cu.ft ³)	12.2 (430.83)
Effective Piston Area SD sq.cm (sq.inch)	12.4 (1.92)
Cone Material	Treated Paper Composite Cone
Unit Diameter mm(inch)	210 (8.26)
Mounting Depth mm(inch)	48 (1.9)
Net Weight Kg (lb)	0.5 (1.1)

TWEETERS	MT 25
Nominal Impedance (ohm)	4
Power Handling Wrms	90
Max. Trans. Pwr Handling Wrms (10ms)	160
Sensitivity (2.83 V/1M) dB	91.5
Frequency Response Hz	1600-20000
FS Hz	1200
Voice Coil Diameter mm (inch)	25 (1)
Voice Coil Wire	Copper
Magnet System	Neodymium
Mounting Depth mm (inch)	20 (0.8)

CROSSOVERS	MX 80T HP	MX 80WF LP
Crossover Point	2700Hz/6dB	5000Hz/6dB

* Morel operates a policy of continuous products design improvement, consequently specifications are subject to alteration without prior notice

Wishing you many years of sound enjoyment!



Morel, Ness Ziona, 70400 Israel.
 Tel: +972-8-9301161
 Fax: +972-8-9301312
 E-mail: info@morelhifi.com

Morel America, Chandler, AZ, USA
 Toll free number: 1-877-667-3511
 Fax: 1-718-721-1560
 E-mail: info@morelamerica.com

www.morelhifi.com