




Club 54F



Specifications

- Type: 5-1/4" (130mm) Two-Way Car Speaker
- Power Handling: 45W RMS, 135W peak
- Sensitivity (@ 2.83V): 91dB
- Frequency Response: 75Hz – 20kHz
- Nominal Impedance: 3.0 ohms

Thiele-Small Parameters

- BL (Tm): 3.563
- DCR (ohms): 2.24
- Mms (g): 9.484
- Sd (cm²): 103.87
- Cms (μm/N): 0.274
- Vas (l): 4.1850
- Fs (Hz): 98.7
- Qes: 1.036
- Qms: 8.608
- Qts: 0.925
- Crossover Point: 3kHz



HARMAN International
Industries, Incorporated, 8500
Balboa Boulevard, Northridge,
CA 91329 USA

© 2023 HARMAN International
Industries, Incorporated.

All rights reserved. JBL is a
trademark of HARMAN International Industries, Incorporated,
registered in the United States and/or other countries.
Features, specifications and appearance are subject to change
without notice.



JBL CLUB SPEAKERS GEN 3

Upgrade multi-element speakers and component systems engineered to deliver world-class JBL performance and superior fit into most factory speaker locations.



Pro Car Audio by JBL

Club coaxial and component speakers bring JBL pro sound to more vehicles. Their compact design means they'll fit into more vehicles than many of our competitors, and their high sensitivity delivers outstanding performance even with modestly-powered factory systems. Rugged polypropylene cones with the Plus One™ design deliver hard-hitting bass and long performance life. Edge-driven silk dome tweeters deliver broader and smoother high frequency response, never-harsh regardless of output level. Starfish™ Tweeter Mounting Adapter and I-Mount Tweeter Mounting Kit in component speaker system for easy installation. Available in a range of standard sizes - 3", 4", 5-1/4", 6-1/2", 6" x 8", 4" x 6", 6" x 9", and 3/4" - they're the perfect upgrade from factory speakers.

Features

- ▶ Plus One™ Woofer Cone Architecture
- ▶ Edge-driven Silk Dome Tweeter
- ▶ Specified Shallow Design for More Mounting Application
- ▶ Adjustable Tweeter Output Level
- ▶ Acoustically Damped, UV-resistant Polypropylene Cone
- ▶ Bigger Magnet, Bigger Power Handling
- ▶ Special Tweeter Pod Design for Acoustic Adjustment on Different Listening Position
- ▶ Starfish™ Tweeter Mounting Adapter
- ▶ I-Mount Tweeter Mounting Kit



JBL CLUB SPEAKERS GEN 3

Upgrade multi-element speakers and component systems engineered to deliver world-class JBL performance and superior fit into most factory speaker locations.



Club 34F

Club 44F

Club 54F

Club 64FSL

Club 64

Club 64CTP



Club 64C

Club 644F

Club 864F

Club 964M

Club 194T

Features and Benefits

Plus One™ Woofer Cone Architecture

(Club 34F, 44F, 54F, 64FSL, 64, 64C, 64CTP, 644F, 864F, 964M)

Patented (US patent #7,548,631) Plus One™ cones provide more overall speaker-cone area than other speakers for the same size, resulting in higher sensitivity, increased low-frequency output and greater musical character.

Edge-driven Silk Dome Tweeter

(Club 44F, 54F, 64, 864F, 964M)

The Club 44F, Club 54F, Club 64, Club 864F, Club 964M feature a full, edge-driven silk dome tweeter, which delivers a broader and smoother high frequency response, never-harsh regardless of output level than more commonly used w-domes.

Specified Shallow Design for More Mounting Application (Club 64FSL)

Club 64FSL specified compact design for 6-1/2" that allows them to fit in just about any vehicle on the road today. That means signature JBL sound in more vehicles.

Adjustable Tweeter Output Level

(Club 64, 64C, 64CTP)

The Club 64 and Club 64C, Club 64CTP component systems offer a tweeter output level control of 0dB or +3dB to optimize system linearity based on installation location.

Acoustically Damped, UV-resistant Polypropylene Cone

(Club 34F, 44F, 54F, 64FSL, 64, 64C, 64CTP, 644F, 864F, 964M)

Every Club speaker's woofer cone is designed to deliver clean, non-resonant sound quality, while standing up to the demanding heat and humidity of the car environment.

Bigger Magnet, Bigger Power Handling

(Club 34F, 44F, 54F, 64FSL, 64, 64C, 64CTP, 644F, 864F, 964M)

The new Club lineup features a larger magnet delivering higher power handling than competitors at similar price points.

Special Tweeter Pod Design for Acoustic Adjustment on Different Listening Position

(Club 64CTP)

The Club 64CTP Component Speaker system not only including the Starfish™ Tweeter Mounting Adapter and I-Mount™ Tweeter Mounting Kit but also offering the new installation possibility-Tweeter Pod. It is easy to install, more importantly, the tweeter pod can adjust the angle by up and down even after mounting, which allow you to control the acoustic performance on different listening position.

Starfish™ Tweeter Mounting Adapter

(Club 64C, 64CTP, 194T)

The Club 64C, Club 64CTP component Speaker system come with the Starfish™ tweeter mounting adapter. The Starfish tweeter mounting adapter allows for easy installation of the tweeter behind factory grilles and in locations such as an A-Pillar. It also provides six break-off mounting tabs to accommodate many mounting configurations. The tweeter can be surface- or flush-mounted. The tweeter can be easily serviced, and doesn't require removing the whole assembly.

I-Mount™ Tweeter Mounting Kit

(Club 64C, 64CTP, 194T)

The I-Mount™ (patent no. 5,859,917) tweeter-mounting system allows easy and versatile installation of tweeters in each of the component systems. It includes a flush cup and surface-mount mounting hardware. With a 1-3/4" cutout and a 1" mounting depth, installation becomes a snap. This allows the tweeter to be flush-mounted and can be angled up to ±40 degrees. Locknuts are included to keep everything in place, and the tweeter can be replaced without removing the whole assembly.



JBL CLUB SPEAKERS GEN 3

Upgrade multi-element speakers and component systems engineered to deliver world-class JBL performance and superior fit into most factory speaker locations.

Technical Specifications

Club 34F (3-1/2" (87mm) Two-Way Car Speaker)

- ▶ Power Handling: 25W RMS, 75W peak
- ▶ Sensitivity (@2.83V): 89dB
- ▶ Frequency Response: 90Hz – 20kHz
- ▶ Nominal Impedance: 3.0 ohms

Club 44F (4" (100mm) Two-Way Car Speaker)

- ▶ Power Handling: 35W RMS, 105W peak
- ▶ Sensitivity (@ 2.83V): 90dB
- ▶ Frequency Response: 75Hz – 20kHz
- ▶ Nominal Impedance: 3.0 ohms

Club 54F (5-1/4" (130mm) Two-Way Car Speaker)

- ▶ Power Handling: 45W RMS, 135W peak
- ▶ Sensitivity (@ 2.83V): 91dB
- ▶ Frequency Response: 75Hz – 20kHz
- ▶ Nominal Impedance: 3.0 ohms

Club 64FSL (Shallow-Mount 6-1/2" (160mm) Two-Way Car Speaker)

- ▶ Power Handling: 55W RMS, 165W peak
- ▶ Sensitivity (@ 2.83V): 92dB
- ▶ Frequency Response: 55Hz – 20kHz
- ▶ Nominal Impedance: 3.0 ohms

Club 64 (6-1/2" (160mm) Two-way Car Speaker, Engineered For Better Sound Performance)

- ▶ Power Handling: 60W RMS, 180W peak
- ▶ Sensitivity (@ 2.83V): 93dB
- ▶ Frequency Response: 48Hz – 21kHz
- ▶ Nominal Impedance: 3.0 ohms

Club 64C & Club 64CTP (6-1/2" (160mm) Two-Way Component Speaker System with Tweeter Pod)

- ▶ Power Handling: 70W RMS, 210W peak
- ▶ Sensitivity (@ 2.83V): 92dB
- ▶ Frequency Response: 55Hz – 20kHz
- ▶ Nominal Impedance: 3.0 ohms

Club 644F (4"x 6" (100mm x 152mm) Two-Way Car Speaker)

- ▶ Power Handling: 40W RMS, 120W peak
- ▶ Sensitivity (@ 2.83V): 92dB
- ▶ Frequency Response: 75Hz – 20kHz
- ▶ Nominal Impedance: 3.0 ohms

Club 864F (6"x8" (152mm x 203mm) Two-way Car Speaker)

- ▶ Power Handling: 60W RMS, 180W peak
- ▶ Sensitivity (@ 2.83V): 93dB
- ▶ Frequency Response: 65Hz – 20kHz
- ▶ Nominal Impedance: 3.0 ohms

Club 964M (6"x9" (152mm x 230mm) Three-way Car Speaker)

- ▶ Power Handling: 85W RMS, 255W peak
- ▶ Sensitivity (@ 2.83V): 93dB
- ▶ Frequency Response: 50Hz – 20kHz
- ▶ Nominal Impedance: 3.0 ohms

Club 194T (3/4" (19mm) Edge-Driven Dome Tweeter)

- ▶ Power Handling: 50W RMS, 150W peak
- ▶ Sensitivity (@ 2.83V): 92dB
- ▶ Frequency Response: 3kHz – 20kHz
- ▶ Nominal Impedance: 3.0 ohms

What's in the Box

Club 34F, 44F, 54F, 644F & 864F

- 2x Speakers
- 1x Foam gasket

Club 64FSL

- 2x Speakers
- 1x Foam gasket
- 16x Screws
- 8x Speed clips
- 2x Plastic multi-hole adapter rings

Club 64

- 2x Speakers
- 2x Grilles
- 1x Foam gasket
- 16x Screws
- 8x Speed clips
- 2x Plastic multi-hole adapter rings
- 2x JBL logo badge

Club 964M

- 2x Speakers
- 2x Grilles
- 2x Foam gasket
- 8x Screws
- 8x Speed clips
- 2x JBL logo badge
- 2x Bottom mount brackets

Club 64C

- 2x Speakers
- 2x Grilles
- 2x Plastic multi-hole adapter rings
- 1x Foam gasket
- 2x Crossovers
- 2x Tweeters
- 2x Flush-mount cups
- 2x Threaded flush-mount adapters
- 2x Surface-mount cups
- 2x Starfish tweeter mounts
- 2x Plastics locking nuts
- 22x Screws
- 8x Speed clips
- 2x Spacers
- 2x Washers
- 2x JBL logo badge

Club 64CTP

- 2x Speakers
- 2x Grilles
- 2x Plastic multi-hole adapter rings
- 1x Foam gasket
- 2x Crossovers
- 2x Tweeters
- 2x Flush-mount cups
- 2x Threaded flush-mount adapters
- 2x Surface-mount cups
- 2x Starfish tweeter mounts
- 2x Plastics locking nuts
- 28x Screws
- 8x Speed clips
- 2x Spacers
- 2x Washers
- 2x Tweeter pod kit
- 2x JBL logo badge

Club 194T

- 2x Tweeters
- 2x Flush-mount cups
- 2x Threaded flush-mount adapters
- 2x Surface-mount cups
- 2x Starfish tweeter mounts
- 2x Plastics locking nuts
- 6x Screws
- 2x In-line crossover pigtail
- 2x Spacers
- 2x Washers



JBL

by HARMAN

CLUB54F



PATENTED PLUS ONE™ WOOFER CONE ARCHITECTURE
HAUT-PARLEUR DE GRAVES AVEC ARCHITECTURE DU CÔNE BREVETÉE PLUS ONE™

ARQUITECTURA PATENTADA DE CONO DE ALTAVOZ PLUS ONE™ | PATENTIERTE PLUS ONE™-TIEFTÖNERMEMBRAN-ARCHITEKTUR | ARCHITETTURA BREVETTATA DEL CONO DEL WOOFER PLUS ONE™ | ARQUITETURA PATENTEADA DE CONE DE WOOFER PLUS ONE™ | ПОДЪЗБОР НИЗКОЧАСТОТНОГО ДИНАМИКА ЗАПАТЕНТОВАННОЙ АРХИТЕКТУРЫ PLUS ONE™ | 专利的 PLUS ONE™ WOOFER 锥盆结构 | ARSITEKTUR WOOFER PLUS ONE™ KÉRDŐT YÁN DÖNTŐKÖN | 特許取得済み プラス ワン™ ウーファー コーン アーキテクチャ | 특허받은 PLUS ONE™ 우퍼 콘 아키텍처



EDGE-DRIVEN SILK DOME TWEETER
HAUT-PARLEUR D'AIGUS À DÔME EN SOIE « EDGE DRIVEN »

ALTAVOZ DE AGUDOS CON CÚPULA DE DISPERSION DE SEDA | HOCHTÖNERSALÖTTE MIT SEIDENMEMBRAN | TWEETER A CUPOLA IN SETA PILOTATO SUL BORDO | TWEETER DE CÚPULA DE SEDA EDGE-DRIVEN | ШЕЛКОВЫЙ КУПЛЬНЫЙ ВЫСОКЧАСТОТНЫЙ ДИНАМИК С ПРИВОДОМ ПО КРАЮ | 边缘驱动柔丝球顶高音喇叭 | TWEETER KUPULAH RAJDS EDGE-DRIVEN | 엣지드라이브실크돔트위터 | EDGE-DRIVEN 실크 돔 트위터




ACOUSTICALLY DAMPED, UV-RESISTANT POLYPROPYLENE CONE
CÔNE EN POLYPROPYLÈNE AVEC ACOUSTIQUE AMORTIE ET PROTECTION CONTRE LES UV

CONO DE POLIPROPILENO CON AISLAMIENTO ACÚSTICO Y RESISTENTE A RAYOS UV | AKUSTISCH GEDÄMPFTE, UV-RESISTENTE POLYPROPYLEN-MEMBRAN | CONO IN POLIPROPILENO ACUSTICAMENTE SMORZATO E RESISTENTE AI RAGGI UV | CONE DE POLIPROPILENO RESISTENTE A UV COM AMORTECIMENTO ACÚSTICO | С АКУСТИЧЕСКИМ ДЕМПИРОВАНИЕМ, КОНУС ИЗ ПОЛИПРОПИЛЕНА, СТОЙКОГО К УФ-ИЗЛУЧЕНИЮ | 声学阻尼、抗 UV 聚丙烯锥盆 | KERÜDŐT POLIPROPÉNA TÁHAN SZÍNAR UV DENGAN PEREDAM AKUSTIK | 音響減衰、紫外線抵抗性 ポリプロピレン コーン | 어쿠스틱 댐퍼, 자외선 차단 폴리프로필렌 콘

PATENTED PLUS ONE™ WOOFER CONE ARCHITECTURE

JBL

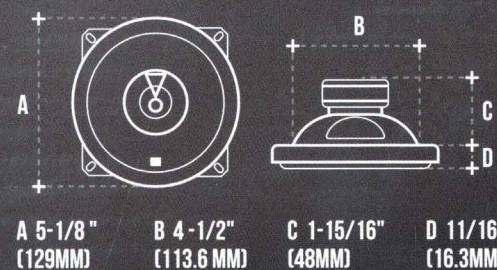

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

WHAT'S IN THE BOX

CONTENU DE LA BOÎTE | CONTEÚDO DA
CAIXA | 包装盒内物品



×2



×1

TECHNICAL SPECS

CARACTÉRISTIQUES TECHNIQUES |
ESPECIFICAÇÕES TÉCNICAS | 技术
规格



45W RMS
135W PEAK



(@ 2.83V): 91DB



75 Hz - 20 kHz



3.0 OHMS

HARMAN

HARMAN International Industries, Incorporated 8500 Balboa Boulevard, Northridge, CA 91329 USA. 8500 Бальбоа В оул е вар, Нортридж CA 91329 С Ш А. Harman International Industries, Incorporated EMEA Liaison Office, Danzigerkade 16G, 1013 AP Amsterdam, The Netherlands. Ground Floor, Westside 2, London Road, Apsley, Hemel Hempstead, Hertfordshire, HP3 9TD, United Kingdom. Made in Vietnam / Fabriqué en Vietnam / Fabricado en Vietnam / Fabbricato nella Vietnam / 越南制造 / Сделано во Вьетнаме. www.jbl.com. © 2022 HARMAN International Industries, Incorporated. All rights reserved. Tous droits réservés.

Todos los derechos reservados. Tutti i diritti riservati. Alle Rechte vorbehalten. Все права защищены. Todos os direitos reservados. JBL is a trademark of HARMAN International Industries, Incorporated, registered in the United States and/or other countries. Features, specifications and appearance are subject to change without notice. JBL est une marque commerciale de HARMAN International Industries, Incorporated, déposée aux États-Unis et/ou dans d'autres pays. Les caractéristiques, les spécifications et l'aspect sont susceptibles d'être modifiés sans préavis. JBL es una marca comercial de HARMAN International Industries, Incorporated, registrada en los Estados Unidos e/ou em outros países. As características, as especificações e o design estão sujeitos a alteração sem aviso prévio. JBL ist ein Warenzeichen von HARMAN International Industries, Incorporated, registriert in den Vereinigten Staaten und/oder anderen Ländern. Änderungen an Merkmalen, Spezifikationen und Aussehen können ohne vorherige Ankündigung erfolgen. JBL è un marchio di fabbrica di HARMAN International Industries, Incorporated, registrato negli Stati Uniti e/o negli altri Paesi. Le funzionalità, le specifiche e l'aspetto sono passibili di modifiche senza preavviso. JBL – это торговая марка компании HARMAN International Industries Incorporated, зарегистрированной в США и других странах. Функции, характеристики и внешний вид могут изменяться без предварительного уведомления. JBL (インフィニティ)は、ハーマン・インターナショナル・インダストリーズ 株式会社(HARMAN International Industries, Incorporated)の、米国および/またはその他の国々の登録商標です。特徴、仕様および外観は、予告なしに変更されることがあります。JBL는 미국 및 기타 국가에 등록된 HARMAN International Industries, Incorporated의 상표입니다. 기능, 사양 및 외관은 예고 없이 변경될 수 있습니다. JBL是HARMAN International Industries, Incorporated在美国和/或其他国家/地区的注册商标。如性能、规格及外观等有更改,恕不另行通知。JBL adalah merek dagang milik HARMAN International Industries, Incorporated, yang terdaftar di Amerika Serikat dan/atau negara-negara lainnya. Fitur, spesifikasi, dan penampilan produk dapat berubah tanpa pemberitahuan.

Пассивная акустическая система | Изготовитель: Харман Интернешнл Индастриз Инкорпорейтед, США, 06901 Коннектикут, г.Стэмфорд, Атлантик Стрит 400, офис 1500 | Импортёр: ООО "ХАРМАН РУС СиАйЭс", Россия, 127018, г.Москва, ул. Двинцев, д.12, к. 1 | Товар сертифицирован

制造商: Harman International Industries, Incorporated | 地址: 8500 Balboa Blvd, Northridge, CA 91329, 美国 | 经销商: 哈曼(中国)投资有限公司 | 地址: 上海市黄浦区南京西路288号3004室 | 中国地区客户服务中心电话: 400 630 6678 | 包装箱尺寸: 长316 x 宽168 x 高73 (毫米) | 毛重: 1.65 公斤。

No Brasil, Importado e distribuído por HARMAN DO BRASIL IND. ELET. E PART. LTDA CNPJ: 88.315.379/0001-70, Rod. Gov. Leonel de Moura Brizola, nº 3401 Nova Santa Rita RS-Brasil-CEP 92480-000. ATENÇÃO! Conforme lei brasileira nº 11.291, a exposição prolongada a ruídos superiores a 85dB pode causar danos ao sistema auditivo. Atendimento Técnico: 0800-5714161 (Ligação gratuita)

