



EUPHORIA™

XPERT

NEODYMIUM SERIES

EXM6SN / 400 WATTS

6.5" NEODYMIUM SERIES MIDRANGE

FEATURES

- 2.0" (51mm) Voice Coil
- Neodymium 10 Piece Radially Equalized Magnet Assembly
- IP52 Rated Paper Cone With Treated Cloth Surround
- Heavy Gauge Steel Stamped Basket

SPECIFICATIONS




- Power Handling-AES: 200 Watts*
- Dynamic Wattage: 400 Watts
- Frequency Response: 85Hz - 11KHz
- Sensitivity (1w/1m): 98.1dB
- Nominal Impedance: 4Ω

DIMENSIONS

- Mounting Depth: 2.85" / 72.5mm
- Cutout diameter: 5.62" / 143mm

THIELE-SMALL PARAMETERS

- | | |
|--------------------------------------|-----------|
| ▪ Resonant Frequency (fs) | 119.2Hz |
| ▪ D.C. Voice coil resistance (RE) | 3.2Ω |
| ▪ Mechanical Quality Factor (Qms) | 8.01 |
| ▪ Electrical Quality Factor (Qes) | 0.45 |
| ▪ Total Quality factor (Qts) | 0.43 |
| ▪ Equivalent Air Volume to Cms (Vas) | 2.9L |
| ▪ Mechanical Compliance (Cms) | 0.12 mm/N |

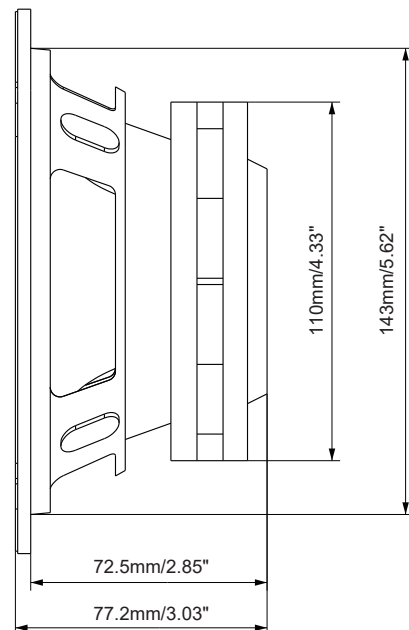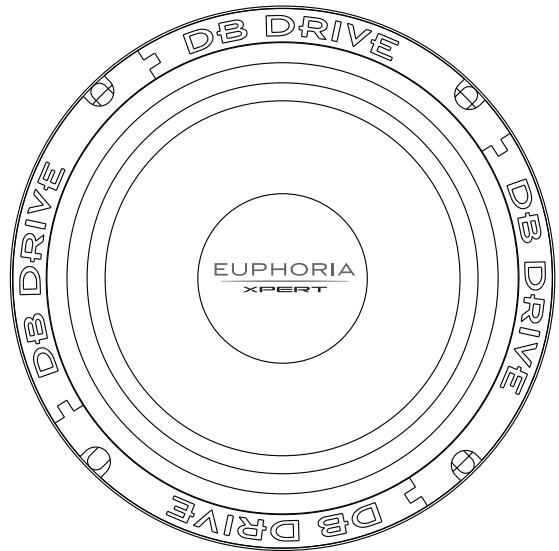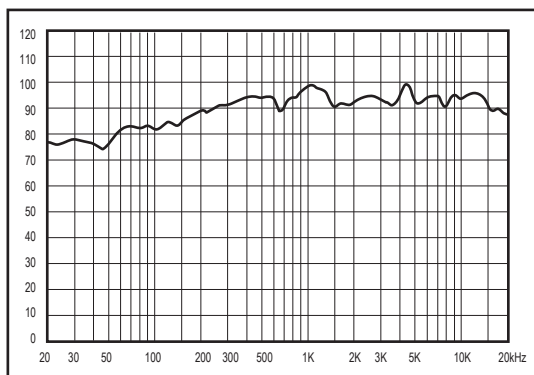

DB Drive is a Registered Trademark of DB Research L.L.P.
Euphoria is a Registered Trademark of DB Research L.L.P.
Designed and Engineered in the U.S.A.