



INSTALLATION MANUAL

Club 322F

Club 3412T

Club 422F

Club 522F

Club 602C

Club 602CTP

Club 620F


Club 622



Club 6422F

Club 8622F

Club 9632

Club 620F

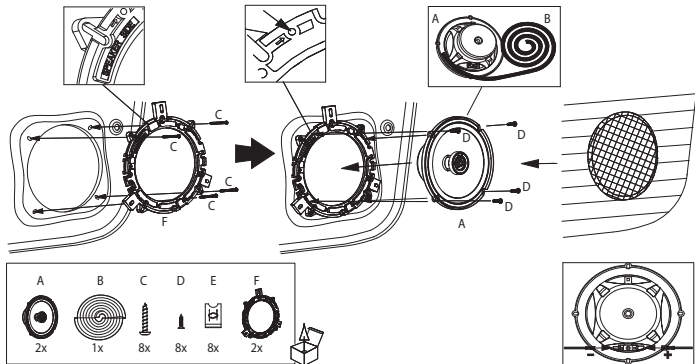



Specifications

- Type: Shallow-Mount 6-1/2" (160mm) Two-Way Car Speaker
- Power Handling: 55W RMS, 165W peak
- Sensitivity (@ 2.83V): 92dB
- Frequency Response: 55Hz – 20kHz
- Nominal Impedance: 3.0 ohms

Thiele-Small Parameters

- BL (Tm): 3.739
- DCR (ohms): 2.41
- Mms (g): 9.934
- Sd (cm²): 122.72
- Cms (μm/N): 0.278
- Vas (l): 5.9287
- Fs (Hz): 95.7
- Qes: 1.032
- Qms: 11.357
- Qts: 0.946
- Crossover Point: 4kHz



HARMAN International
Industries, Incorporated, 8500
Balboa Boulevard, Northridge,
CA 91329 USA

© 2019 HARMAN International
Industries, Incorporated.

All rights reserved. JBL is a
trademark of HARMAN International Industries, Incorporated,
registered in the United States and/or other countries.
Features, specifications and appearance are subject to change
without notice.



CLUB620F



PATENTED PLUS ONE™ WOOFER CONE ARCHITECTURE
HAUT-PARLEUR DE GRAVES AVEC ARCHITECTURE DU CÔNE
BREVETÉE PLUS ONE™

ARQUITECTURA PATENTADA DE CONO DE ALTAVOZ PLUS ONE™



SPECIFIED DESIGN FOR SHALLOW MOUNTING
SPÉCIALEMENT CONÇU POUR UN MONTAGE PEU PROFOND
DISEÑO ESPECÍFICO PARA MONTURA PLANA




ACOUSTICALLY DAMPED, UV-RESISTANT POLYPROPYLENE
CONE
CÔNE EN POLYPROPYLÈNE AVEC ACOUSTIQUE AMORTIE ET
PROTECTION CONTRE LES UV

CONO DE POLIPROPILENO CON AISLAMIENTO ACÚSTICO Y RESISTENTE A
RAYOS UV

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SPECIFIED
DESIGN FOR
SHALLOW
MOUNTING

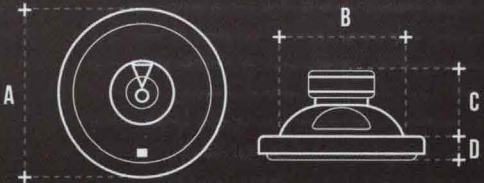


A	B	C	D
6-1/4"	4-7/8"	1-15/16"	7/16"
(158MM)	(123.4MM)	(47.7MM)	(10.7MM)

WHAT'S IN THE BOX

CONTENU DE LA BOÎTE | CONTEÚDO DA
CAIXA



2x



1x



8x



8x



8x



2x

TECHNICAL SPECS

CARACTÉRISTIQUES TECHNIQUES |
ESPECIFICAÇÕES TÉCNICAS



55WRMS
165W PEAK



(@ 2.83V): 92DB



55Hz - 20kHz



3.0 OHMS