

DASH DISASSEMBLY

1. Tilt the steering wheel to its lowest position.
2. Engage the parking brake.
3. Insert the ignition key into the ignition switch, and then turn the ignition switch to the ON position. Do not start the engine! (Not required for manual shift vehicles).
4. Depress the brake pedal and adjust the shift lever to the lowest gear position (not required for manual shift vehicles).
5. Carefully unclip the radio / climate control trim bezel by pulling it forward, (towards yourself) then disconnect all wire harnesses attached to the rear of the trim bezel and lift the radio / climate control trim bezel upward to remove it from the dashboard.
6. Depress the retaining clips securing the radio to the sub-dash and then pull the radio forward, unplug the harness(s) and antenna lead and remove radio.

The Sub Dash May need to be modified to fit the radio chassis

Double DIN ISO MOUNT APPLICATION


Note: DO NOT snap metal clips to mainframe until you are at step 4.

1. Insert ISO mountable radio between ISO mount brackets and attach to sides of radio using screws provided with radio when possible, or screws supplied with kit.
2. Plug all necessary harnesses and antenna connections to the radio and slide into the sub dash, until locked into place.
3. Test fit the GMK346TB main panel/radio by making sure the main frame aligns correctly and does not leave any gaps when installed. If everything looks correct go to step #4. If not, repeat step 2 & 3 until correct.
4. Attach the 11 metal clips supplied to the mainframe.

Note: When installing panel clips to main frame, Please make sure they are fully seated.

5. Snap mainframe to the dash pressing firmly

Suggested...Attach a rear support bracket to the rear of the new radio and adjust as necessary to support the weight of the radio.

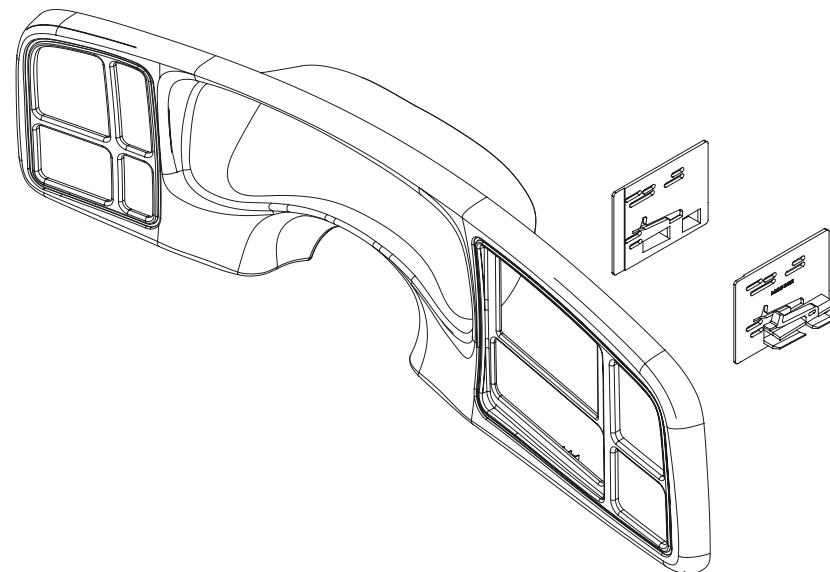

GMK346TB Mounting Kit



www.aampglobal.com **www.aius.net**
2500 East Francis Street Ontario, CA 91761, U.S.A.
Sales: (800) 477-2267
Intl: (727) 572-9255
Support: 888-228-5560

iGMK346TB

VEHICLE APPLICATION

The Sub Dash May need to be modified to fit the radio chassis

Chevrolet

2002 AVALANCHE
1999-2002 SILVERADO 1500
1999-2002 SILVERADO 2500
2001-2002 SILVERADO 3500
2000-2002 SUBURBAN
2000-2002 TAHOE

GMC

1999-2002 SIERRA 1500
2000-2002 SIERRA 2500
2001-2002 SIERRA 3500
2000-2002 YUKON
2000-2002 YUKON XL