



EUPHORIA™

XPERT™

NEODYMIUM SERIES

EX69NPS-CF / 800 WATTS

6 x 9" POINT SOURCE NEO CARBON FIBER LOUDSPEAKER

FEATURES

- 1.5" (38.1mm) Mid-Range Voice Coil
- High-Intensity NEO Ring Magnet
- IP65 Rated Weather Resistant Carbon Fiber Cone
- Cloth Surround
- Stamped Steel Basket
- Wide Dispersion 1" Aluminum Dome Tweeter
- Protective Grill

SPECIFICATIONS




- Power Handling : 400 Watts
- Dynamic Wattage: 800 Watts
- Frequency Response: 77Hz - 19KHz
- Sensitivity (1w/1m): 92 dB
- Impedance: 4Ω

DIMENSIONS

- Mounting Depth: 3.18" / 80.80mm
- Cutout Diameter: 8.66 x 6.45" / 220 x 164mm

THIELE-SMALL PARAMETERS

- | | |
|--------------------------------------|-----------|
| ▪ Resonant Frequency (fs) | 68.8Hz |
| ▪ D.C. Voice coil resistance (RE) | 3.2Ω |
| ▪ Mechanical Quality Factor (Qms) | 9.95 |
| ▪ Electrical Quality Factor (Qes) | 0.44 |
| ▪ Total Quality factor (Qts) | 0.42 |
| ▪ Equivalent Air Volume to Cms (Vas) | 14.1L |
| ▪ Mechanical Compliance (Cms) | 0.20 mm/N |
| ▪ Efficiency (1W/1M) | 92dB |

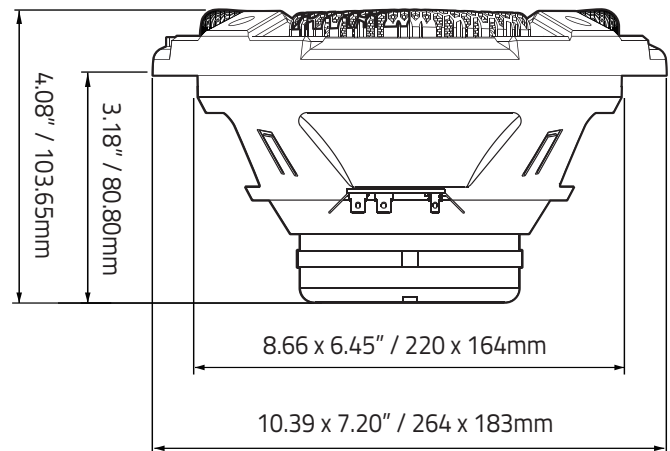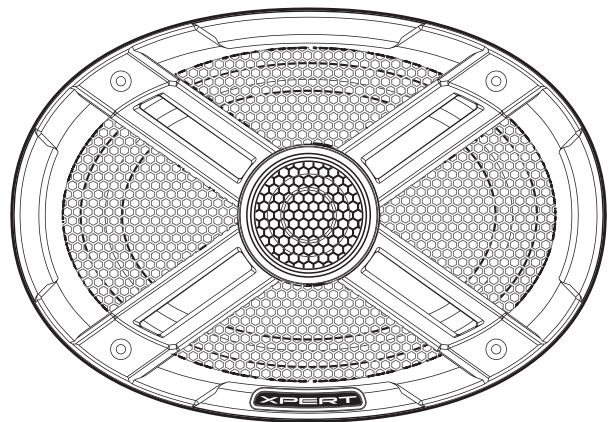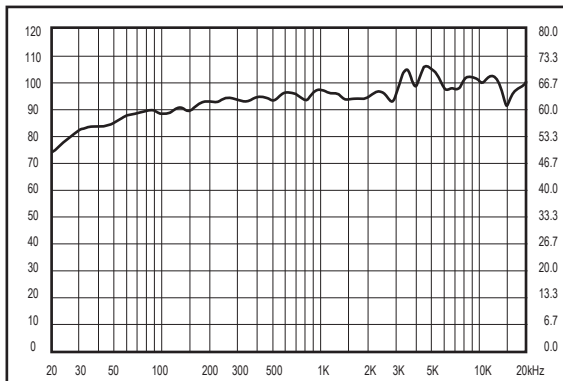

DB Drive, Euphoria and Xpert are Registered Trademarks of DB Research L.L.P.
Designed and Engineered in the U.S.A.